

zSecure Admin and Audit for RACF

Getting Started



Note

Before using this information and the product it supports, read the information in [“Notices” on page 137](#).

July 2021

This edition applies to version 2, release 5, modification 0 of IBM® Security zSecure Admin (product number 5655-N16) and IBM Security zSecure Audit (product number 5655-N17), and to all subsequent releases and modifications until otherwise indicated in new editions.

© **Copyright International Business Machines Corporation 1989, 2021.**

US Government Users Restricted Rights – Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

Contents

About this publication.....	vii
zSecure documentation.....	vii
Obtain licensed documentation.....	vii
IBM Security zSecure Suite library.....	vii
IBM Security zSecure Manager for RACF z/VM library.....	x
Related documentation.....	x
Accessibility.....	xii
Technical training.....	xii
Support information.....	xiii
Statement of Good Security Practices.....	xiii
 Chapter 1. Overview.....	 1
CARLa auditing and reporting language.....	2
Data sources.....	3
CKFREEZE data sets.....	4
Remote data and command routing.....	4
 Chapter 2. Basic operations.....	 5
Before you begin.....	5
Starting the products.....	5
Maintaining RACF profiles.....	6
Displaying user profiles.....	7
Using the User selection panel.....	10
Filter notation.....	12
Date notation.....	12
Showing application segments.....	12
Displaying group profiles.....	13
Universal groups.....	14
Connecting and removing users.....	15
Reviewing data set profiles.....	16
Listing profiles in warning mode.....	18
Displaying discrete profiles.....	19
Displaying the access control list (ACL).....	19
Access control list formats.....	20
Access list display settings.....	22
Checking access to resources with the Access command.....	23
Administration of access rights.....	24
Creating digital certificates templates.....	24
Working with certificates, key rings, filters, and tokens.....	28
Comparing users.....	31
 Chapter 3. Administration of users and profiles.....	 33
Generating and confirming RACF commands.....	33
Command logging facility.....	34
Performing a mass update.....	34
Copying a user.....	35
Delete a user with all references.....	36
Re-create a profile.....	36
Merge and compare profiles.....	36
Redundant profile management.....	37

Displaying data structures.....	38
Running SETROPTS reports and viewing class settings.....	40
Chapter 4. Distributed and scoped administration functions.....	43
Group Administration with RACF scope.....	43
The Quick Administration panel.....	43
Group administration through CKGRACF.....	44
Single panel Helpdesk function.....	45
Helpdesk password or phrase administration functions.....	46
Tailoring the Helpdesk.....	47
Chapter 5. Setup functions for managing data.....	49
Adding data.....	49
Adding new files.....	49
Refreshing and loading files.....	51
Selecting the input set.....	52
Specifying collections of input sets.....	52
Other Setup parameters.....	55
INSTDATA parameter.....	55
View and Confirm options.....	55
SMTP options for email output.....	55
Command execution control.....	56
Changing and verifying values.....	58
Line commands for common tasks.....	59
Chapter 6. Creating and viewing a report.....	61
Results panel.....	62
Archiving report output.....	62
Mailing report output.....	63
Chapter 7. Verify functions.....	65
Running the Verify functions.....	65
Running the Verify functions for the first time.....	67
Chapter 8. Auditing system integrity and security.....	69
Chapter 9. Rule-based compliance evaluation.....	73
AU.R - Compliance menu options.....	74
AU.R.C - Configure.....	74
AU.R.E - Evaluate.....	82
Chapter 10. SMF data queries.....	93
Defining input sets.....	94
Creating SMF reports.....	96
Auditing types of users.....	97
Library change detection.....	99
Chapter 11. Resource-based reports for RACF resources.....	101
CICS region and resource reports.....	102
CICS region reports.....	102
CICS transaction reports.....	102
CICS program reports.....	103
Db2 region and resource reports.....	104
Db2 region reports.....	104
Db2 resource reports.....	105
File integrity monitoring.....	107

Hardware displays.....	109
IP Stack reports.....	109
Job entry subsystem and started tasks.....	110
Cryptographic key information (RE.K).....	110
IMS region and resource reports.....	111
IMS region reports.....	112
IMS transaction reports.....	112
IMS PSB reports.....	113
VTAM application reports.....	114
z/OS settings.....	115
Executable programs reports.....	116
MQ region and resource reports.....	117
MQ region reports.....	117
MQ resource reports.....	118
Trust relations reports.....	119
UNIX file system reports.....	120
Chapter 12. CARLa queries.....	125
Browsing the SCKRCARL library.....	126
Running a member of the SCKRCARL library.....	126
Customizing the CARLa program.....	127
Creating a sample CARLa program.....	128
Running a saved CARLa program.....	129
Chapter 13. Typical administration and audit tasks.....	131
Removing a user.....	131
Displaying which data sets a user can access.....	131
Load library audit.....	131
Print data on display panels.....	132
Find profiles based on search criteria.....	132
Protect All Verify function.....	132
Command function.....	132
Appendix A. Frequently asked questions.....	133
Notices.....	137
Trademarks.....	138
Index.....	141

About this publication

IBM Security zSecure Admin and Audit for RACF® automates many of the recurring administrative tasks and audit reporting for RACF systems. These products rely on the zSecure Collect program to collect and analyze data from RACF and z/OS® systems, enabling you to easily monitor user access privileges, implement scoping to limit administrator privileges, and to audit user behavior. These products also enhance the administrative and reporting functions of RACF systems, facilitating security monitoring and decentralizing system administration.

The purpose of this document is to help you quickly become familiar with IBM Security zSecure Admin and Audit for RACF. After working through this document, you should have a working understanding of these products and the ability to explore other product features. This document is not a full reference manual and does not cover all features. The material focuses on the interactive features (using ISPF panels) and highlights the major functions of IBM Security zSecure Admin and Audit for RACF.

Except for a few introductory pages, this document is intended as a hands-on guide while you work with IBM Security zSecure Admin and Audit for RACF. The publication explains how to use IBM Security zSecure Admin and Audit for RACF to perform common administration tasks and how to audit and run reports on RACF systems.

The target audience for this book includes security administrators and mainframe system programmers. Readers of this book should have a working knowledge of RACF systems administration and be comfortable using the Interactive System Productivity Facility (ISPF).

zSecure documentation

The IBM Security zSecure Suite and IBM Security zSecure Manager for RACF z/VM libraries consist of unlicensed and licensed publications. This section lists both libraries and instructions to access them.

Unlicensed zSecure publications are available at IBM Documentation for [IBM Security zSecure Suite \(z/OS\)](#) or [IBM Security zSecure Manager for RACF z/VM](#). For instructions to obtain the zSecure 2.5.0 licensed publications, see [Obtain licensed documentation](#).

Obtain licensed documentation

The unlicensed zSecure 2.5.0 documentation is publicly available at IBM Documentation for [IBM Security zSecure Suite](#). The licensed documentation is available to zSecure customers only. This document describes how to request access to the licensed documentation.

The zSecure 2.5.0 licensed documentation is available at [IBM Security zSecure Suite Library](#).

To access the zSecure 2.5.0 licensed documentation, you must sign in to the [IBM Security zSecure Suite Library](#) with your IBM ID and password. If you do not see the licensed documentation, your IBM ID is probably not yet registered. Send a mail to zDoc@nl.ibm.com to register your IBM ID. Provide your organization's client name and number, as well as your own name and IBM ID. If you do not yet have an IBM ID, you can [Create an IBM account](#). You will receive confirmation of registration by mail.

IBM Security zSecure Suite library

The IBM Security zSecure Suite library consists of unlicensed and licensed publications.

Unlicensed zSecure publications are available at IBM Documentation for [IBM Security zSecure Suite \(z/OS\)](#). Licensed publications are available to zSecure customers only. To obtain the licensed publications, see [“Obtain licensed documentation” on page vii](#). Licensed publications have a form number that starts with L; for example, LC27-6533.

The IBM Security zSecure Suite library consists of the following publications:

- *About This Release* includes release-specific information as well as some more general information that is not zSecure-specific. The release-specific information includes the following:
 - *What's new*: Lists the new features and enhancements in zSecure 2.5.0.
 - *Release notes*: For each product release, the release notes provide important installation information, incompatibility warnings, limitations, and known problems for the IBM Security zSecure products.
 - *Documentation*: Lists and briefly describes the zSecure Suite and zSecure Manager for RACF z/VM libraries and includes instructions for obtaining the licensed publications.
 - *Related documentation*: Lists titles and links for information related to zSecure.
 - *Support for problem solving*: Solutions to problems can often be found in IBM knowledge bases or a product fix might be available. If you register with IBM Software Support, you can subscribe to IBM's weekly email notification service. IBM Support provides assistance with product defects, answers frequently asked questions, and helps to resolve problems.
- *zSecure CARLa-Driven Components Installation and Deployment Guide*, SC27-5638
 Provides information about installing and configuring the following IBM Security zSecure components:
 - IBM Security zSecure Admin
 - IBM Security zSecure Audit for RACF, CA-ACF2, and CA-Top Secret
 - IBM Security zSecure Alert for RACF and CA-ACF2
 - IBM Security zSecure Visual
 - IBM Security zSecure Adapters for SIEM for RACF, CA-ACF2, and CA-Top Secret
- *zSecure Admin and Audit for RACF Getting Started*, GI13-2324
 Provides a hands-on guide introducing IBM Security zSecure Admin and IBM Security zSecure Audit product features and user instructions for performing standard tasks and procedures. This manual is intended to help new users develop both a working knowledge of the basic IBM Security zSecure Admin and Audit for RACF system functionality and the ability to explore the other product features that are available.
- *zSecure Admin and Audit for RACF User Reference Manual*, LC27-5639 (licensed)
 Describes the product features for IBM Security zSecure Admin and IBM Security zSecure Audit. Includes user instructions to run the admin and audit features from ISPF panels. This manual also provides troubleshooting resources and instructions for installing the zSecure Collect for z/OS component. This publication is available to licensed users only.
- *IBM Security zSecure Admin and Audit for RACF Line Commands and Primary Commands Summary*, SC27-6581
 Lists the line commands and primary (ISPF) commands with very brief explanations.
- *zSecure Audit for ACF2 Getting Started*, GI13-2325
 Describes the zSecure Audit for CA-ACF2 product features and provides user instructions for performing standard tasks and procedures such as analyzing Logon IDs, Rules, Global System Options, and running reports. The manual also includes a list of common terms for those not familiar with ACF2 terminology.
- *zSecure Audit for ACF2 User Reference Manual*, LC27-5640 (licensed)
 Explains how to use zSecure Audit for CA-ACF2 for mainframe security and monitoring. For new users, the guide provides an overview and conceptual information about using CA-ACF2 and accessing functionality from the ISPF panels. For advanced users, the manual provides detailed reference information, troubleshooting tips, information about using zSecure Collect for z/OS, and details about user interface setup. This publication is available to licensed users only.
- *zSecure Audit for Top Secret User Reference Manual*, LC27-5641 (licensed)
 Describes the zSecure Audit for CA-Top Secret product features and provides user instructions for performing standard tasks and procedures. This publication is available to licensed users only.
- *zSecure CARLa Command Reference*, LC27-6533 (licensed)

Provides both general and advanced user reference information about the CARLa Auditing and Reporting Language (CARLa). CARLa is a programming language that is used to create security administrative and audit reports with zSecure. The *zSecure CARLa Command Reference* also provides detailed information about the NEWLIST types and fields for selecting data and creating zSecure reports. This publication is available to licensed users only.

- *zSecure Alert User Reference Manual*, SC27-5642

Explains how to configure, use, and troubleshoot IBM Security zSecure Alert, a real-time monitor for z/OS systems protected with the Security Server (RACF) or CA-ACF2.

- *zSecure Command Verifier User Guide*, SC27-5648

Explains how to install and use IBM Security zSecure Command Verifier to protect RACF mainframe security by enforcing RACF policies as RACF commands are entered.

- *zSecure CICS Toolkit User Guide*, SC27-5649

Explains how to install and use IBM Security zSecure CICS® Toolkit to provide RACF administration capabilities from the CICS environment.

- *zSecure Messages Guide*, SC27-5643

Provides a message reference for all IBM Security zSecure components. This guide describes the message types associated with each product or feature, and lists all IBM Security zSecure product messages and errors along with their severity levels sorted by message type. This guide also provides an explanation and any additional support information for each message.

- *zSecure Visual Client Manual*, SC27-5647

Explains how to set up and use the IBM Security zSecure Visual Client to perform RACF administrative tasks from the Windows-based GUI.

Program directories are provided with the product tapes. You can also download the latest copies from [Program Directories](#).

- *Program Directory: IBM Security zSecure CARLa-Driven Components*, GI13-2277

This program directory is intended for the systems programmer responsible for program installation and maintenance. It contains information concerning the material and procedures associated with the installation of IBM Security zSecure CARLa-Driven Components: Admin, Audit, Visual, Alert, and the IBM Security zSecure Adapters for SIEM.

- *Program Directory: IBM Security zSecure CICS Toolkit*, GI13-2282

This program directory is intended for the systems programmer responsible for program installation and maintenance. It contains information concerning the material and procedures associated with the installation of IBM Security zSecure CICS Toolkit.

- *Program Directory: IBM Security zSecure Command Verifier*, GI13-2284

This program directory is intended for the systems programmer responsible for program installation and maintenance. It contains information concerning the material and procedures associated with the installation of IBM Security zSecure Command Verifier.

- *Program Directory: IBM Security zSecure Admin RACF-Offline*, GI13-2278

This program directory is intended for the systems programmer responsible for program installation and maintenance. It contains information concerning the material and procedures associated with the installation of the IBM Security zSecure Admin RACF-Offline component of IBM Security zSecure Admin.

- Program Directories for the zSecure Administration, Auditing, and Compliance solutions:

- 5655-N23: *Program Directory for IBM Security zSecure Administration*, GI13-2292
- 5655-N24: *Program Directory for IBM Security zSecure Compliance and Auditing*, GI13-2294
- 5655-N25: *Program Directory for IBM Security zSecure Compliance and Administration*, GI13-2296

IBM Security zSecure Manager for RACF z/VM library

The IBM Security zSecure Manager for RACF z/VM library consists of unlicensed and licensed publications.

Unlicensed publications are available at IBM Documentation for [IBM Security zSecure Manager for RACF z/VM](#). Licensed publications are available to zSecure customers only. To obtain the licensed publications, see [Obtain a licensed publication](#). Licensed publications have a form number that starts with L; for example, LCD7-5373.

The IBM Security zSecure Manager for RACF z/VM library consists of the following publications:

- *IBM Security zSecure Manager for RACF z/VM Release Information*

For each product release, the Release Information topics provide information about new features and enhancements, incompatibility warnings, and documentation update information. You can obtain the most current version of the release information from the zSecure for z/VM documentation website at IBM Documentation for [IBM Security zSecure Manager for RACF z/VM](#).

- *IBM Security zSecure Manager for RACF z/VM: Installation and Deployment Guide, SC27-4363*

Provides information about installing, configuring, and deploying the product.

- *IBM Security zSecure Manager for RACF z/VM User Reference Manual, LC27-4364*

Describes how to use the product interface and the RACF administration and audit functions. The manual provides reference information for the CARLa command language and the SELECT/LIST fields. It also provides troubleshooting resources and instructions for using the zSecure Collect component. This publication is available to licensed users only.

- *IBM Security zSecure CARLa Command Reference, LC27-6533*

Provides both general and advanced user reference information about the CARLa Auditing and Reporting Language (CARLa). CARLa is a programming language that is used to create security administrative and audit reports with zSecure. The *zSecure CARLa Command Reference* also provides detailed information about the NEWLIST types and fields for selecting data and creating zSecure reports. This publication is available to licensed users only.

- *IBM Security zSecure Documentation CD, LCD7-5373*

Supplies the IBM Security zSecure Manager for RACF z/VM documentation, which contains the licensed and unlicensed product documentation.

- *Program Directory for IBM Security zSecure Manager for RACF z/VM, GI11-7865*

To use the information in this publication effectively, you must have some prerequisite knowledge that you can obtain from the program directory. The *Program Directory for IBM Security zSecure Manager for RACF z/VM* is intended for the systems programmer responsible for installing, configuring, and deploying the product. It contains information about the materials and procedures associated with installing the software. The Program Directory is provided with the product tape. You can also download the latest versions from IBM Documentation for [IBM Security zSecure Manager for RACF z/VM](#).

Related documentation

This section includes titles and links for information related to zSecure.

See:	For:
IBM Security zSecure Suite	All zSecure unlicensed documentation. For information about what is specific for a release, system requirements, incompatibilities and so on, select the version of your choice and <i>About This Release</i> ; see "What's new" and "Release notes". To obtain the zSecure licensed documentation, see Obtain licensed documentation .

See:	For:
IBM Security Identity Adapters IBM Security Verify Governance Application Adapters	Information about the IBM Security Verify Governance Application Adapters.
IBM Documentation for z/OS	Information about z/OS. Table 1 on page xi lists some of the most useful publications for use with zSecure.
IBM Z® Multi-Factor Authentication documentation	Information about IBM Z Multi-Factor Authentication (MFA) documentation.
z/OS Security Server RACF publications	Information about z/OS Security Server Information about z/OS Security Server Resource Access Control Facility (RACF). For information about the RACF commands, and the implications of the various keywords, see the <i>z/OS Security Server RACF Command Language Reference</i> and the <i>z/OS Security Server RACF Security Administrator's Guide</i> . You can find information about the various types of events that are recorded by RACF in the <i>z/OS Security Server RACF Auditor's Guide</i> .
QRadar® DSM Configuration Guide	For more information about QRadar, see the IBM QRadar Security Intelligence Platform on IBM Documentation .
IBM CICS Transaction Server for z/OS documentation	Information about CICS Transaction Server for z/OS.
IBM MQ	Information about IBM MQ.
IBM Z NetView®	Information about IBM Z NetView.
CA-ACF2 documentation	Information about ACF2 and the types of events that can be reported using zSecure Audit for ACF2.
CA-Top Secret for z/OS documentation	Information about Top Secret and the types of events that can be reported using zSecure Audit for Top Secret.

For additional information about using IBM Security zSecure Visual, see these publications:

- *IBM Security zSecure CARLa-Driven Components Installation and Deployment Guide, SC27-5638*
Provides reference information for installing, configuring, and deploying IBM Security zSecure Visual Server on a z/OS system.
- *IBM Security zSecure Admin and Audit for RACF User Reference Manual, LC27-5639*
Provides information about the IBM Security zSecure Admin and Audit for RACF components and explains how to use the features from the ISPF panels. It also describes RACF administration and audit user documentation as well as troubleshooting resources and instructions for installing the zSecure Collect for z/OS component. This publication is available to licensed users only.
- *IBM Security zSecure CARLa Command Reference , LC27-6533*
Provides both general and advanced user reference information about the CARLa Auditing and Reporting Language (CARLa) programming language, that can be used to create security administrative and audit reports with zSecure. This publication is available to licensed users only.

Table 1. Some of the most useful z/OS publications for use with zSecure	
Manual Title	Order Number
<i>z/OS Communications Server: IP Configuration Guide</i>	SC27-3650
<i>z/OS Communications Server: IP Configuration Reference</i>	SC27-3651
<i>z/OS Cryptographic Services ICSF Administrator's Guide</i>	SC14-7506

Table 1. Some of the most useful z/OS publications for use with zSecure (continued)

Manual Title	Order Number
<i>z/OS Cryptographic Services ICSF System Programmer's Guide</i>	SC14-7507
<i>z/OS Integrated Security Services Enterprise Identity Mapping (EIM) Guide and Reference</i>	SA23-2297
<i>z/OS ISPF Dialog Developer's Guide and Reference</i>	SC19-3619
<i>z/OS MVS Initialization and Tuning Reference</i>	SA23-1380
<i>z/OS MVS Programming: Assembler Services Reference, Volume 1 (ABE-HSP)</i>	SA23-1369
<i>z/OS MVS Programming: Assembler Services Reference, Volume 2 (IAR-XCT)</i>	SA23-1370
<i>z/OS MVS™ Programming: Authorized Assembler Services Reference, Volume 1 (ALE-DYN)</i>	SA23-1372
<i>z/OS MVS System Codes</i>	SA-0665
<i>z/OS MVS Programming: Callable Services for High Level Languages</i>	SA23-1377
<i>z/OS MVS System Commands</i>	SA38-0666
<i>z/OS MVS System Management Facilities (SMF)</i>	SA38-0667
<i>z/OS Security Server RACF Security Administrator's Guide</i>	SA23-2289
<i>z/OS Security Server RACF Auditor's Guide</i>	SA23-2290
<i>z/OS Security Server RACF Command Language Reference</i>	SA23-2292
<i>z/OS Security Server RACF Macros and Interfaces</i>	SA23-2288
<i>z/OS Security Server RACF Messages and Codes</i>	SA23-2291
<i>z/OS Security Server RACF System Programmer's Guide</i>	SA23-2287
<i>z/OS UNIX System Services Messages and Codes</i>	SA23-2284
<i>z/OS UNIX System Services Planning</i>	GA32-0884
<i>z/Architecture® Principles of Operation</i>	SA22-7832

For information about z/VM, see [IBM z/VM documentation](#) or see www.vm.ibm.com/library.

Accessibility

Accessibility features help users with a physical disability, such as restricted mobility or limited vision, to use software products successfully. With this product, you can use assistive technologies to hear and navigate the interface. You can also use the keyboard instead of the mouse to operate all features of the graphical user interface.

Technical training

For technical training information, see the IBM Training and Skills website at [IBM Training](#).

For a list of formal customer education for IBM Security zSecure, see the [zSecure Course Offerings](#). This PDF file is part of the [zSecure - Learning](#) information, which also includes CARLa self studies and sample applications.

Support information

IBM Support provides assistance with code-related problems and routine, short duration installation or usage questions. You can directly access the IBM Software Support site at www.ibm.com/mysupport.

Statement of Good Security Practices

IT system security involves protecting systems and information through prevention, detection, and response to improper access from within and outside your enterprise. Improper access can result in information being altered, destroyed, misappropriated, or misused or can result in damage to or misuse of your systems, including for use in attacks on others. No IT system or product should be considered completely secure and no single product, service, or security measure can be completely effective in preventing improper use or access. IBM systems, products, and services are designed to be part of a comprehensive security approach, which will necessarily involve additional operational procedures, and may require other systems, products, or services to be most effective. IBM DOES NOT WARRANT THAT ANY SYSTEMS, PRODUCTS, OR SERVICES ARE IMMUNE FROM, OR WILL MAKE YOUR ENTERPRISE IMMUNE FROM, THE MALICIOUS OR ILLEGAL CONDUCT OF ANY PARTY.

Chapter 1. Overview

IBM Security zSecure Admin and IBM Security zSecure Audit for RACF are two distinct but complementary products that you can use to administer and audit RACF systems.

zSecure Admin provides RACF management and administration at the system, group, and individual levels along with RACF command generation. zSecure Audit provides RACF and z/OS monitoring, Systems Management Facility (SMF) reporting, z/OS integrity checking, rule-based compliance evaluation, and library change detection. Both products provide displaying, reporting and verifying functionality for RACF profiles and show the z/OS tables that describe the Trusted Computing Base (TCB). [Figure 1 on page 1](#) shows the functionality available in each product and shows the complementary functionality that is provided in both products.

zSecure Admin and zSecure Audit for RACF are licensed individually, but can be used together.

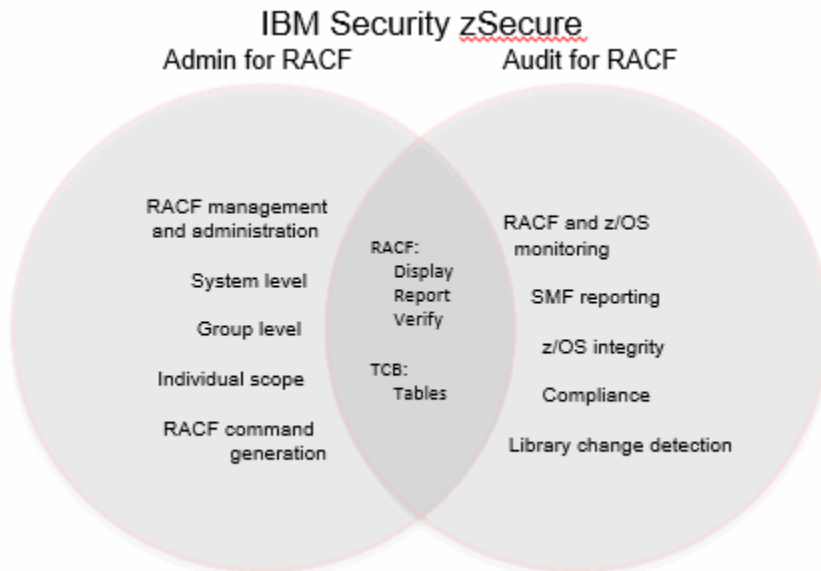


Figure 1. zSecure Admin and zSecure Audit product functions

The primary processing programs are large modules that can be used in batch or interactive mode. Interactive mode is most common, although batch mode can be useful for automated, periodic checks and for producing daily reports.

zSecure Admin and zSecure Audit provide an interactive user interface that is implemented in ISPF by using the *panel*, *skeleton*, and *message* libraries that are supplied with zSecure. ISPF is the main program that runs during an interactive session, calling the zSecure application program as needed. The interactive panels call the CKRCARLA load module as needed.

[Figure 2 on page 2](#) illustrates the general data flow for zSecure Admin and zSecure Audit. The user works through ISPF panels, which generate commands that are sent to the CKRCARLA program. The program returns results that are displayed through ISPF panels.

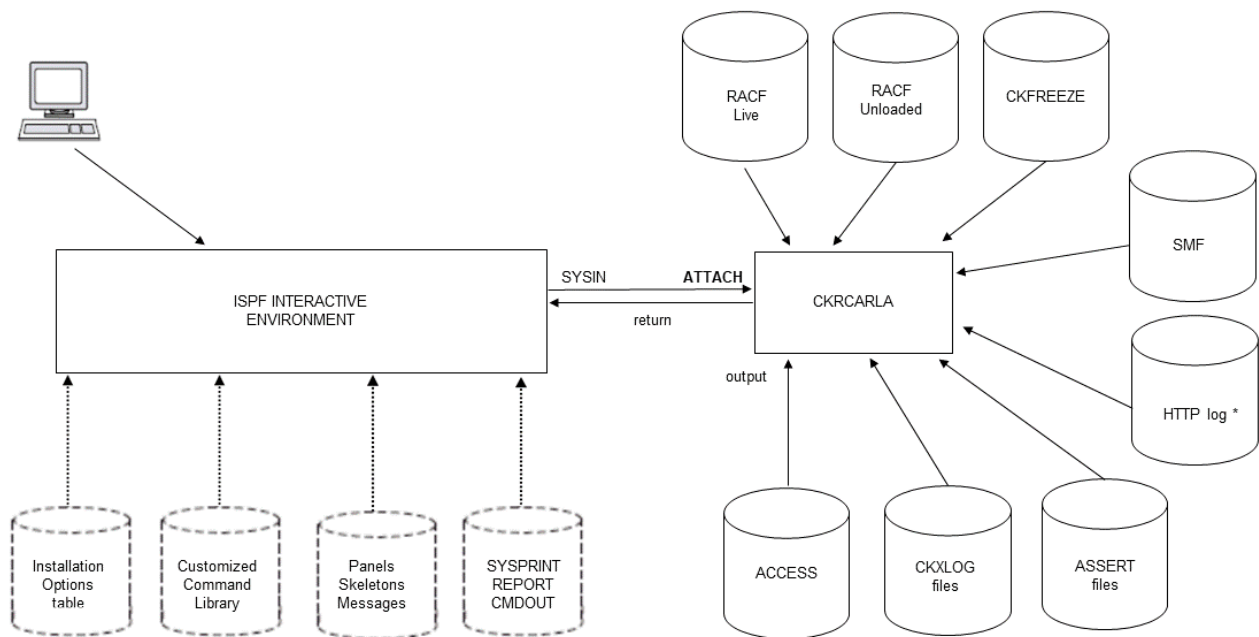


Figure 2. Conceptual data flow

This general design, with separate interactive and noninteractive components, has several practical advantages:

- It separates interactive interfaces from the application program. This separation gives you more flexibility in designing and using the interfaces and programs, especially when you customize the ISPF interface.
- Any functions that can be run interactively can also be run in batch mode.
- zSecure Admin and zSecure Audit for RACF can create customized reports by using the CARLa Auditing and Reporting Language (CARLa) and run these reports from the ISPF panels.
- The products can be used remotely in cases where a TSO connection is not possible or practical, in NJE networks, for example.

CARLa auditing and reporting language

IBM Security zSecure Admin and Audit for RACF are command-driven and use the CARLa Auditing and Reporting Language (CARLa).

A typical user who uses ISPF does not need to be concerned with CARLa. The commands are generated automatically and sent to the application program. Except for these few comments, this guide does not contain information about the CARLa command language. Instead, this guide concentrates on the use of zSecure Admin and Audit through ISPF.

The command language is generally used for the following reasons:

- To generate customized reports
- To use the product in batch mode

The CARLa commands are explained in the *IBM Security zSecure CARLa Command Reference* (LC27-6533).

Because the standard reports are comprehensive, you might never need customized reports, but you can create them. Batch use is attractive as part of a security monitoring function. For example, you can use a scheduled batch job to run monitoring checks and reports automatically.

A comprehensive set of sample reports is available in the CARLa library (low-level qualifier of SCKRCARL and often referred to with the default ddname CKRCARLA).

Data sources

zSecure Admin and zSecure Audit for RACF use several different types of data.

Figure 3 on page 3 provides an overview of the data sources and the processing that is done by the products.

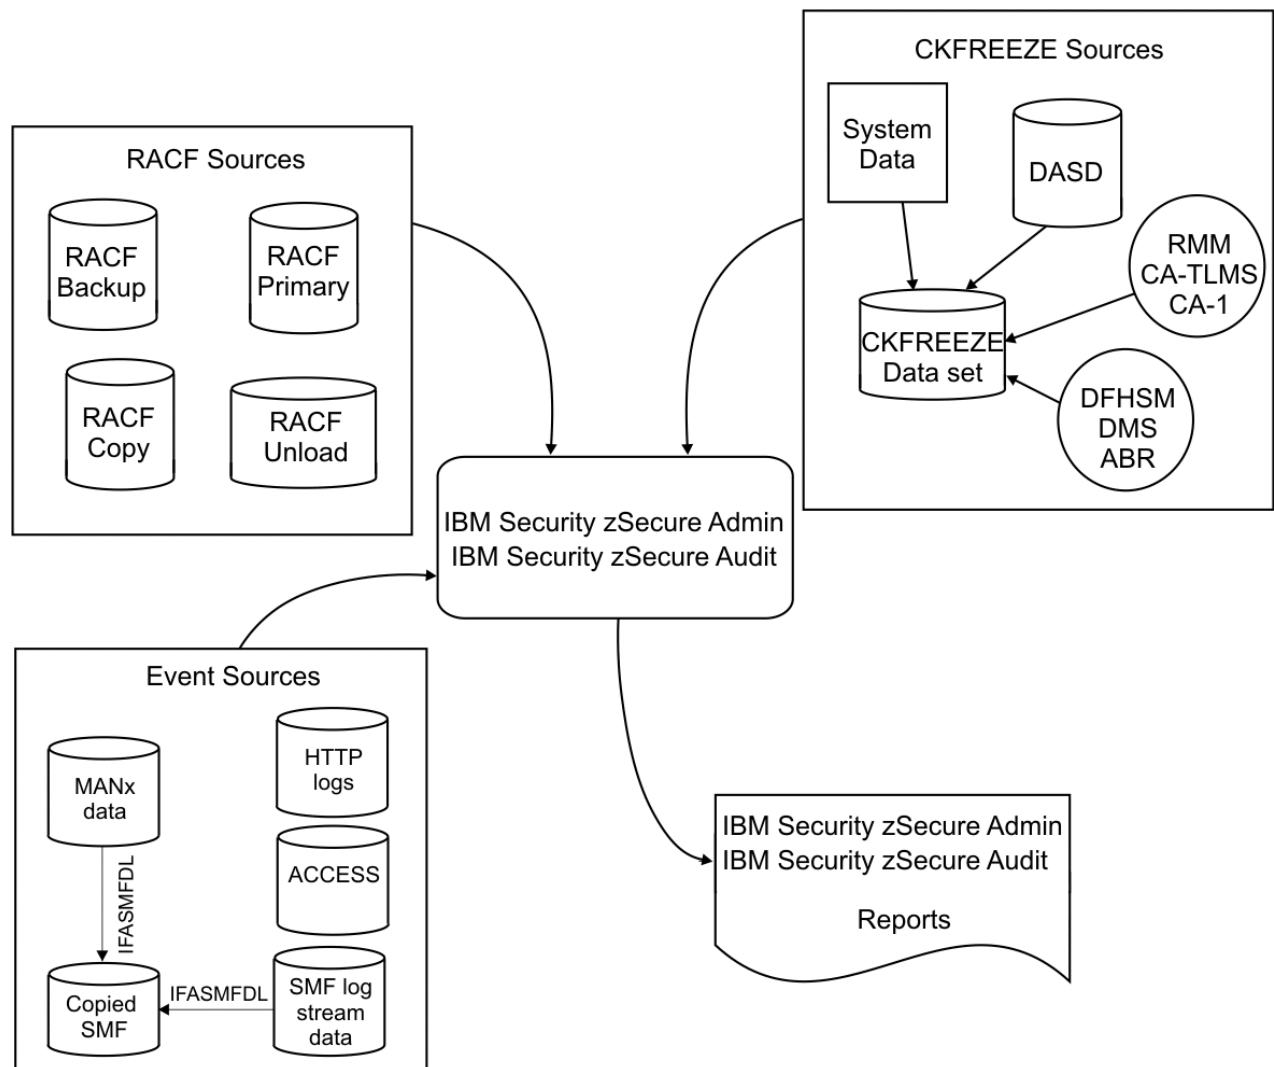


Figure 3. Data input sources

zSecure Admin and zSecure Audit for RACF typically require RACF data. This data can come from the following sources:

- The primary live RACF database
- The backup live RACF database
- Unloaded RACF data
- A copy of a RACF database or an active RACF database from another system

zSecure produces unloaded RACF data by reading the live RACF database and creating a copy in a proprietary format suitable for high-speed searches.

If you are using zSecure Audit for RACF functions, the program might require SMF data. The SMF data can come from the live SMF data sets, SMF log streams, or sequential SMF data sets produced with the **IFASMFDP** or **IFASMFDL** programs. These IBM programs unload SMF records from the live SMF data sets and SMF log streams. Sequential SMF data sets can be on disk or tape, although TSO users might

not be able to mount tapes for interactive use with many installations. zSecure Audit cannot process pseudo-SMF files that are created by the RACF **REPORT WRITER** or the **IRRADU00 SMF** unload program.

CKFREEZE data sets

zSecure Audit for RACF uses DASD data that is gathered by zSecure Collect and written to a CKFREEZE data set.

The zSecure Collect program runs as a batch job and reads all online Volume Table Of Contents (VTOCs), VSAM Volume Data Set (VVDs), catalogs, selected Partitioned Data Set (PDS) directories, and calculates digital signatures at the member and data set level when requested. It writes all this data to a CKFREEZE data set.

zSecure Admin and zSecure Audit for RACF also use z/OS control block data. zSecure Collect gathers this data at the same time that it gathers DASD data. It uses APF-authorized functions to retrieve data from other address spaces and from read-protected common storage. Additionally, batch collection permits analysis of a remote system where the data was collected.

You define input sets for zSecure Admin and zSecure Audit for RACF. For example, one set might consist only of the live RACF data. Another set might use live RACF data plus a CKFREEZE file. Another set might use unloaded RACF data, a CKFREEZE data set, and several SMF data sets. You can switch between input sets while in the ISPF environment.

Remote data and command routing

zSecure Admin and zSecure Audit support the use of remote data sets as input for creating reports and displays. Using this functionality, which is known as multi-system support, you can report on and manage multiple systems from a single session. This function is also integrated with zSecure Admin support for routing RACF commands by using zSecure services or RACF Remote Sharing Facility (RRSF) services.

Using remote data for creating reports is useful for ad hoc reporting about profiles or settings. However, this access method is less suited for queries that require processing of the entire security database or the entire CKFREEZE data set. It takes longer to access large amounts of remote data than it does to access the same data locally.

To use the multi-system support, your environment must have an active zSecure Server, which runs in a separate server address space. This server performs the necessary functions for communicating with remote systems to route commands and access RACF databases, SMF input files, CKFREEZE data sets, and other defined data sets. For more detailed information, see the *IBM Security zSecure Admin and Audit for RACF: User Reference Manual*.

Chapter 2. Basic operations

Review the following procedures to learn how to start the zSecure Admin and Audit applications and to navigate, select, input, and manage RACF data.

You can read about the following tasks:

- Command logging
- Viewing, managing, and maintaining RACF profiles for users, groups, and data sets
- Managing access rights
- Reporting on digital certificates
- Comparing users

Before you begin

Before you begin, verify your TSO logon parameters and screen format.

Follow the procedures outlined in this section before you use zSecure Admin and zSecure Audit for RACF.

TSO logon parameters

Make sure that you are logged on to TSO with a large enough region size. A good region size value to start with analyzing security is 256 MB. For analyzing compliance or large amounts of SMF or access monitor data, you will need more; start with 512 MB. For just displaying RACF profiles in unrestricted mode, you need much less; 64 MB or even 32 MB might be enough, depending on the size of your security database and the amount of extra lookup information the query requests. However, in such a small region, you may not be able to use the "Full ACL" and the ACL EFFECTIVE command.

Screen format

zSecure Admin and Audit for RACF panels are used with 24-line and larger screens. To be most effective with 24-line screens, type the **PFSHOW OFF** command on the command line in any ISPF panel. Press Enter to remove the program function key definition information that ISPF automatically places in the last one or two lines of the screen. Use the **PFSHOW ON** command to restore the PF key definitions.

Starting the products

After installing the products, use this task to start the zSecure Admin and Audit applications and prepare to perform typical tasks.

Procedure

To get started, complete the following steps:

1. Type 6 on the **Option** line and press Enter to open ISPF Command Shell.
2. Enter the command **CKR** and press Enter.

This command starts the combined zSecure Admin and zSecure Audit for RACF products. After you enter the command, the Main menu opens as shown in [Figure 4 on page 6](#).

Menu	Options	Info	Commands	Setup
zSecure Admin+Audit for RACF - Main menu				
Option ==> -----				
SE	Setup	Options and input data sets		
RA	RACF	RACF Administration		
AU	Audit	Audit security and system resources		
RE	Resource	Resource reports		
AM	Access	RACF Access Monitor		
EV	Events	Event reporting from SMF and other logs		
CR	Command review	Review and run commands		
CO	CARLa	Work with CARLa queries and libraries		
IN	Information	Information and documentation		
LO	Local	Locally defined options		
X	Exit	Exit this panel		
Input complex: Active backup RACF data base				
Product/Release				
5655-N16 IBM Security zSecure Admin 2.5.0				
5655-N17 IBM Security zSecure Audit for RACF 2.5.0				

Figure 4. zSecure Suite - Main menu

The first time you enter this panel, only the major selection options are shown.

- 3. If necessary, use option SE . R to reset all your settings to the default settings.
- 4. To select an option, type the two-character abbreviation on the command line and press Enter.

Depending on the option that is selected, the menu either expands to show more detailed options or presents the submenu for the next selection.

When you get more familiar with the product, it can be handy to know the jump command to jump directly to any other panel within that function: =X, where X is the panel identifier. For example, on any RA panel (RACF administration), you can enter the command =G to jump to the RA.G panel (Group administration through CKGRACF).

What to do next

The following sections show you how to use some of the display functions to ensure that the product is working correctly. Your live RACF database is used for input. Typically, using zSecure with the live RACF database does not cause any noticeable effects on production operations.

Maintaining RACF profiles

You can maintain RACF profiles by displaying an overview of the profiles and then selecting one to maintain.

About this task

The profile selection panels have fields, also known as *filters*, to select or to exclude data. By default, everything is selected, and nothing is excluded. To see an example, complete the following steps:

Procedure

- 1. On the Main menu, type **RA** (RACF Administration) in the **Option** line and press Enter to see the options for viewing and maintaining the RACF database.
- 2. Type **G** (Group) in the Option line and press Enter without entering any parameters in the panel.
- 3. At the default prompt, press Enter.

Results

After completing this procedure, zSecure Admin and zSecure Audit for RACF shows everything in the RACF database relevant to the function of the panel, group profile information in this example. You can

reduce the amount of data that is shown in the panel by specifying one or two selection or exclusion parameters.

Tip: You can use the **FORALL** primary command on a record-level display to specify a command to be applied to all profiles on the current display. Without a parameter, primary command **FORALL** displays a panel where a command can be entered. You can also enter the command directly on the **FORALL** command.

This example uses the live RACF database to demonstrate the speed and non-interference of zSecure Admin and Audit with the live RACF database. [“Adding data” on page 49](#) guides you through the creation of an unloaded RACF database. The unloaded database is used for the text and examples in this guide.

What to do next

zSecure Admin helps you maintain profiles at the group and user level and at the single-entry level. You can quickly find out about the structure of groups and users, and modify structures that are based on your organizational structure.

After you learn how to use the interface and manage commands, you learn about general maintenance functions, devolved (or decentralized) maintenance, and how the help desk can shift workload by enabling password maintenance without special authority.

Displaying user profiles

Procedure

1. If you are not in the Main menu, press **PF3** to return to the Main menu.
2. Type RA (RACF Administration) in the Option line and press Enter to see the options for viewing and maintaining the RACF database.
3. From the RA menu, select option **U** (User). Press **Enter** to open the User Selection panel; see [Figure 5 on page 8](#).

This panel provides some of the most frequently used selections. It consists of the following parts:

- **Add new user or segment**
- **Additional selection criteria**
- **Output/run options**

Depending on the selection criteria or output/run options you choose by placing a / in front of one of those options, you might go to another panel to specify more selection criteria.

4. After you make a selection, press **PF3** to return to the User Selection panel or press Enter to run the query.

```

Menu  Options  Info  Commands  Setup
-----
zSecure Admin+Audit for RACF - RACF - User Selection
Command ==> _____ _ start panel

  Add new user or segment
  Show userids that fit all of the following criteria
  Userid . . . . . _____ (user profile key or filter)
  Name . . . . . _____ (name/part of name, no filter)
  Installation data . . . . . _____ (data scan, no filter except *)
  Owned by . . . . . _____ (group or userid, or filter)
  Default group . . . . . _____ (group or filter)
  Connect group . . . . . _____ (group or filter)

  Additional selection criteria
  _ Other fields      _ Attributes      _ Segment presence  _ Absence

  Output/run options
  _ Show segments      _ All              _ Specify scope
  _ Show differences
  _ Print format        Customize title    Send as e-mail
                        Full detail form      Sort differently    Narrow print

```

Figure 5. User Selection panel

5. In the **Userid** field, type your user ID.

Tip: The additional print options are available only if the **Print format** field is activated. To activate this field, type / in the **Print format** selection field.

6. Press Enter.

zSecure Admin and Audit for RACF searches the RACF database and opens the user profile overview panel as shown in Figure 6 on page 8.

```

Line command  Commands  Modifiable fields  Message
-----
zSecure Admin+Audit for RACF USER IBMUSER overview  1 s elapsed, 0.2 s CPU
Command ==> _____ Scroll==> CSR
Users like IBMUSER*
8 Apr 2016 15:16
User  Complex  Name  DfltGrp  Owner  RIRP  SOAR  gC  CX  MF
IBMUSER  TEST  IBM DEFAULT USER  SYS1  IBMUSER  SO  X
*****BOTTOM OF DATA*****

```

Figure 6. Overview display for selected user

The message in the upper right line of the panel provides performance information that indicates the elapsed and processor time that is used to run the query.

This overview display shows each selected user profile on a single line. If applicable, you can scroll up and down, left and right, to view more information.

Some of the field values can be edited, for example, entries in the **Name** column. Depending on your ISPF option settings and terminal type, fields that can be edited (modified) are indicated by underscores or shown in a color that is different from the color for fields that cannot be edited, for example, the **User** field. If you type a new value over a modifiable field, zSecure Admin generates the appropriate native RACF command to change the profile to the new value.

7. Optional: You can change the ISPF display colors in most panels by using the following procedure:
 - a) Select **Options** from the menu bar.
 - b) From the Options menu, select **1. Settings**
 - c) Select **Colors** from the bar.
 - d) Select **2. CUA attributes**.
 - e) After you specify the changes, press Enter to apply them.

The changes become effective the next time you run a query.

The labels in the profile display are abbreviated as shown in Table 2 on page 9.

Table 2. Profile display label descriptions	
Label	Description
RIRP	Flag fields that indicate whether the profile is R Revoked, I Inactive, R Restricted, or P Protected
SOAR	Shows the settings for the following attributes: S Special, O Operations, A Auditor, and R ROAudit
gC	Show g roup Authorities Present and C lass Authority Present
CX	Indicates whether the following conditions are true: <ul style="list-style-type: none"> • User has a certificate (C) • Password is expired (X)
MF	The M column indicates that effective multifactor authentication (MFA) information is present for this userid. That is, the userid has an active MFA factor and it is not a PROTECTED userid. The F column indicates that fallback to a password or a passphrase is allowed if the MFA server is unavailable.

These field descriptions are also available on the integrated help panels available in the ISPF interface. You can access panel-level help and field-level help on most panels. Panel help and field-sensitive help are available on all security database displays at both the record level and detail level.

- For field help, position the cursor in the field of interest and press **PF1**.
- For panel help, position your cursor on the command line and press **PF1**.

Tip: Many of the zSecure data displays are wider than 80 characters. To scroll right or left, use the **PF11** and **PF10** keys.

8. To display more detailed information about a profile, complete the following steps:
 - a) Move the cursor to the beginning of the displayed profile line in the line command field and press **Enter**.
 - b) Select an entry in the panel by using either of the following methods:
 - Position the cursor on the line command field and press **Enter**.
 - Type the S command and press **Enter**.

Additional line commands such as **C** (copy) and **D** (delete) are also available. These commands are covered later.

Tips:

- If you are unsure about the available line commands on a certain profile, type a / and press **Enter**. This action opens a panel that shows all applicable line commands.
- You can use the **FORALL** primary command on a record-level display to apply a command to all profiles on the current display. Without a parameter, the **FORALL** primary command displays a panel where a command can be entered. You can also enter the command directly on the **FORALL** command.

9. To return to the User Selection panel, press **PF3**. Press **PF3** twice if you are in the detail overview.
10. Now try something a little more interesting, such as entering SYS* in the **UserId** field to display all user profiles that start with SYS*. You can inspect the details for these users by selecting any displayed user profile line. If you have appropriate authority for the RACF database, you can change many of these fields by editing the field value in the panel. When you specify a new value, zSecure checks to prevent accidental changes. For the example, do not make any changes.

Note: When you specify selection criteria in a field, you can use the generic characters asterisk (*) and percent sign (%).

11. As another example, you can type / in the **Specify scope** option to examine the profiles within the scope of another user ID or group.

When you select this option, a panel opens for specifying the user ID or group ID.

Using the User selection panel

About this task

The User Selection panel is split into the following sections:

- Use the first section to add a user or segment.
- Use the second section to specify the most commonly used RACF management selection criteria.
- Use the third section mostly to report on the RACF database with more advanced selection criteria. For example, you can report on all user profiles that have the SPECIAL and OPERATIONS attributes.
- Use the fourth section to customize the resulting output from your query. For example, you can type / in the **Show differences** option to compare two input sources.

To do this comparison, you must select one baseline input that is set by using the **SETUP FILES C** action command and at least one regular main set by using the **SETUP FILES S** action command.

For more detailed information, see the *IBM Security zSecure Admin and Audit for RACF: User Reference Manual*.

Procedure

1. To select options for the advanced selection criteria (third section) and output customization (fourth section), place a / next to the option. Press Enter.

Note: Most of the fourth section of the panel can be modified only if the **Print format** option is selected by placing a / in front of it and pressing **Enter**. Before you can use the `Send as email` option, you must specify SMTP configuration parameters. Specify the parameters in the Setup output definition panel, as described in [“SMTP options for email output” on page 55](#). For now, continue without selecting the **Print format** option.

zSecure displays any user profile that matches the criteria you enter in the User Selection panels. If nothing is specified for a particular option, that option is ignored during the search. Several options accept /. The / means that the option is selected and profiles that match the specified parameter or parameters are displayed (or an additional selection panel is displayed). Most options also accept the **S** command to activate the selection option. Blank means that the option is ignored for selecting profiles.

For example, typing / in the **Attributes** option opens the User Attributes panel that is illustrated in [Figure 7 on page 11](#).


```

Menu          Options      Info      Commands      Setup
-----
zSecure Admin+Audit for RACF - RACF - User Attributes
Command ==> -----
All users
Specify groups of criteria that the userids must meet:
Systemwide and group authorizations
OR_   _   Special   _   Operations   _   Auditor   _   RO-auditor
      _   Group-special _   Group-oper   _   Group-audit _   Class auth
Logon status
OR_   _   Revoked   _   Inactive   _   Protected   _   Passw expired
      _   Revoked group _   Certificate _   Pass phrase _   Phrase expired
      _   When day/time _   ID mapping   _   Passw legacy _   Phrase legacy
      _   MFA         _   MFA active   _   MFA fallback _   Password
User properties
OR_   _   Has RACLINK _   Restricted _   User audited _   Mixed case pwd
CKGRACF features
OR_   _   Queued cmds _   Schedules   _   Userdata    _   MultiAuthority
Connect authority . __ _ 1. Use 2. Create 3. Connect 4. Join

```

Figure 7. User Attributes panel

- To display all user profiles that have system-wide authority, type / in the **Operations** option of the **Systemwide and group authorizations** section. Then, press **Enter**.

This operation shows all user profiles that have system-wide OPERATIONS authority.

- In the **Connect authority** section, select user IDs on the specified connect authority.

Only users that have at least one group connection that satisfies the comparison operator that is applied to the connect authority are shown. Use the comparison operators that are shown in [Table 3](#) on page 11.

Table 3. Comparison operators for Connect authority section	
Operator	Description
<	Less than the access specified
<=	Less than or equal to (at most) the access specified
>	More than the access specified
>=	More than or equal to (at least) the access specified
=	Exact access
~= or <>	All but the specified access

Tip: zSecure Admin and zSecure Audit for RACF combine all the properties that you specify with AND logic unless otherwise indicated.

You can use /, Y, or S for the criteria to be true, or N for the criteria to be false. By specifying the AND operator and by using Y and N values in the options within a group, you can find user IDs that have the attributes that are selected with Y but have none of the attributes that are selected with N.

The **Revoked** option in the **Logon status** section checks for currently revoked users.

The **Password interval** option checks for users who are subject to password expiration. This option is available on the panel that displays when you specified / in the **Other fields** field on the RA.U panel. After you select this field, press **Enter** to open the User Attributes panel to specify the attributes for selecting data. Try searching for users with a non-expiring password and SPECIAL authority, or for users with non-expiring passwords and OPERATIONS authority. If you find any such users, other than possibly IBMUSER, you might investigate why they are defined this way.

Filter notation

Use these guidelines to specify filtering criteria for selecting or excluding input data.

In many panels, the input fields accept filters for selecting or excluding data. These filters are strings that can contain any of the following wildcard characters:

%

Match one nonblank character.

Match any number of characters within a single string but not a dot, such as a single data set name qualifier or a user name.

Match any number of qualifiers at the end of a profile name.

:

Search for specified characters within a name, but not for class names or data set qualifiers.

zSecure Admin and zSecure Audit for RACF use Enhanced Generic Naming (EGN) notation whether RACF is in EGN mode.

Date notation

Use these guidelines to specify dates and date ranges in various operations.

Several selection fields are meant for dates. You can use various values and operators. However, all year values must be specified in four digits. [Table 4 on page 12](#) shows examples of date selection values and operators.

Table 4. Date selection values and operator examples	
Operation	Meaning
= 04jul2004	July 4, 2004
< 04jul2004	Any day before July 4, 2004
= never	A date was never set
= today	Activity happened today
= today-3	Three days before today
< today-30	More than 30 days ago
> 01jan2005	Any day after January 1, 2005

A date with the value **DUMPDATE** is the date that your RACF database was unloaded. If you are using the live RACF database, specifying the value **DUMPDATE** is the same as using the value **TODAY**.

Note: When you enter dates in selection fields, you must specify an operator in the small two-character input field and the date value in the larger field.

Showing application segments

Procedure

1. To show application segments for a user profile, specify the user ID for which you want to view the application segments in the User Selection panel.
2. Enter the action command **SE** in front of the user profile. A panel opens with a list of application segments that are defined for this user.

Tip: Instead of using the **SE** action command, you can type a / in front of **Show segments** in the **Output/run options** section of the User Selection panel. This action opens a User Segments panel

so that you can specify which segments you want to see. If you select **Segment presence** together with the **Show segments** field in the **Additional selection criteria** section, a panel opens with a list of segments. You can select a segment and specify additional selection criteria that are based on segment information. For example, you can select users that are based on output settings in the TSO segment.

Displaying group profiles

About this task

This section describes the procedure to display and query group profiles.

To display group profiles, complete the following steps:

Procedure

1. Return to the Main menu by pressing End or Return.
2. From the RA menu, select option **G** (Group) and press Enter to open the Group Selection panel.

This panel, which is shown in [Figure 8 on page 13](#), provides some of the most frequently used selections applicable to group profiles. Like the User Selection panel, this panel has the following sections:

- **Add New Group or Segment**
- The common selection criteria
- **Additional selection criteria**
- **Output/run options**

Depending on the additional selection criteria or output and run options that you select with the / character, you go to another panel to specify more selection criteria.

```

Menu   Options   Info   Commands   Setup
-----
zSecure Admin+Audit for RACF - RACF - Group Selection
Command ==> _ start panel

_ Add new group or segment

Show groups that fit all of the following criteria
Group id . . . . . (group profile key or filter)
Owner . . . . . (group or userid, or filter)
Subgroup of . . . . . (group or filter)
With subgroup . . . . . (group or filter)
Installation data . . . . . (data scan, no filter except *)

Additional selection criteria
_ Profile fields _ Connect fields _ Segment presence _ Absence

Output/run options
_ Show segments _ All _ Expand universal _ Specify scope
_ Show differences
_ Print format Customize title Send as e-mail
Background run Full detail form Sort differently Narrow print
Print connects Print names Print subgroups

```

Figure 8. Group Selection panel

3. In the **Group id** field, type your default group or a group name string; for example, type C=MC* for all group profiles that start with the string C=MC* in the **Group id** field.
4. Press Enter to search the RACF database and display the group profile information in the Group Overview panel.

The display, which is shown in [Figure 9 on page 14](#), looks similar to the User Selection overview except that it now shows different columns and Group profiles instead of User profiles.

zSecure Admin+Audit for RACF GROUP Overview

1 s elapsed, 0.4 s CPU

Command ==> Scroll==> CSR

8 Apr 2016 00:50

Group	Complex	SupGroup	X	Owner	Grps	Users	Conn	U	nTU	Created
C#MC	YESTERDY	CR		CR	11	159				07Nov1995
C#MCDEMO	YESTERDY	C#MC		C#MC	1	15				07Nov1995
C#MCDEMO2	YESTERDY	C#MCDEMO		C#MCDEMO						02May2001
C#MCNG	YESTERDY	C#M		C#M		65				07Nov1995
C#MCURS	YESTERDY	C#M		C#M	9	1				19Nov1998
C#MCWGRP	YESTERDY	C#MC		C#MC		3	3			08Oct1998
C#MCXCNG	YESTERDY	C#MC		C#MC						08May1996
C#MCXGRP	YESTERDY	C#MC		C#MC		4	4			07May1996
C#MCXX	YESTERDY	CR		CR		151				16Oct2001

***** BOTTOM OF DATA *****

Modifiable fields

Figure 9. Group Overview panel

Universal groups

All RACF profiles have a maximum size. The connect information for all connected users is stored in a normal Group profile. It implies that there is a maximum number of users that can be connected to a Group profile. The maximum number is approximately 6000 users. For large RACF databases, this number might not be sufficient. This limitation is the reason for the *universal group*. When the **UNIVERSAL** attribute is assigned to a Group profile, users with a *default connection* (connect to the group with **USE** authority and no connect attributes) are no longer stored in the Group profile. Only users that have a connect attribute like group-**SPECIAL**, group-**OPERATIONS**, or a connect authority that exceeds **USE** are stored in the Group profile.

The advantage of the universal group is that an unlimited number of users can be connected without its reaching the maximum size of a Group profile. So in large RACF databases, it is no longer required to split a large Group. If you do want to split a large group, make a copy of the Group and connect more users to this new Group.

The disadvantage of the universal Group is that, when the Group profile is displayed, you cannot determine which users are connected to the Group without searching all User profiles to find the users that are connected to this universal Group. In zSecure Admin and zSecure Audit you can automate this search by using the Expand universal feature.

Note: Using this feature implies a full database read, and can cause the response time to be much longer.

There are two fields that are related to the **UNIVERSAL** attribute of Group profiles: **Universal Group** and **Expand universal**. If you enter a / before **Profile** fields, a panel similar to the one shown in [Figure 10](#) on [page 15](#) opens.

```

Menu   Options   Info   Commands   Setup
-----
zSecure Admin+Audit for RACF - RACF - Group Selection
Command ==>
All profiles
Show groups that also fit all of the following criteria:
Selection by date
Creation date . . . __ ----- (date: yyyy-mm-dd/ddMMMyyyy/
                                DUMPDATE/DUMPDATE-nnn/
                                TODAY/TODAY-nn/NEVER)

Miscellaneous fields
Complex . . . . . ----- (complex name or filter)
# connected users . -- ---- (operator: < <= > >= = <> = !=)
# subgroups . . . . . ----

Enter "/" to specify selection criteria
- Universal group
- Queued commands
- Userdata

```

Figure 10. Group profile field selection panel

To use the universal groups feature, take one of the following actions:

- On the panel that is shown in [Figure 10 on page 15](#), type / in the **Universal group** field.
This selection searches the RACF database for universal groups only.
- Type / in the **Expand universal** field in the Group Selection panel that is shown in [Figure 8 on page 13](#).
This selection causes all connected users, instead of just users with a non-default connect, to be displayed in the detail overview.

Tip: To see how the Expand universal option works, list a universal group twice: first list the group with the option enabled and then list the group with the option disabled. Notice the differences in the lists of connected users.

Connecting and removing users

There are several ways to connect Users to a Group:

- Issue the **CO** line command (connect) in the Group or User profile overview panel.
- Use a **C** (copy) or **D** (delete) line command in the Group or User profile detail panel that precedes a line that contains connect details of a User or Group.
- Edit (type over) the current values in the lines that contain the connect information. This action generates a new connect command for the new value that you entered, and it generates a remove command for the overwritten value. If you do not want to run the **Remove** command, delete it from the command confirmation panel before you press Enter.

When the line command **CO** is used on a user or group profile, a Connect panel opens as illustrated in [Figure 11 on page 16](#). (For Group profiles, you can add connections for up to 10 users in one operation.)

Menu	Options	Info	Commands	Setup
----- zSecure Suite - RACF - Add connect -----				
Command ==> -----				
Create new connect				
Userid CRMCKF1				
Group (group or filter)				
Optional connect attributes				
Authority (USE ,CREATE ,JOIN or CONNECT)				
Default UACC (N/R/U/C/A)				
Connect owner				
Future revoke date (MM/DD/YY)				
Future resume date (MM/DD/YY)				
- Revoke - Norevoke				
- Special - Operations - Auditor				
Enter a group for a single connect.				
Leave the field blank or enter a filter (e.g. IBM*) to get a selection list.				

Figure 11. Add / copy connect panel

- Use the panel that is shown in Figure 11 on page 16 to connect the User to another Group. In this panel, you cannot change the **Userid** field. When the **CO** command is issued for a Group profile, the **Group name** field cannot be modified instead.
- Optionally, you can specify connect attributes in the lower half of the panel.
- When you use line command **C** instead of **CO** on a User or Group profile detail panel, you can connect the same User to another Group. You can also connect another User to the same Group. It is even possible to modify both the **Userid** and the **Group** fields in the connect panel at the same time, connecting another User to another Group.

Reviewing data set profiles

Procedure

To display data set profiles, complete the following steps:

1. To return to the Main menu, press Exit (PF3) in the Group Selection panel.
2. Select Option **D** to open the Data set Selection panel.

You are still in the RACF subselection panel. This panel, which is shown in Figure 12 on page 17, is typically used to inquire about data set profiles and is used in much the same way as the user profile panel.

```

Menu   Options   Info   Commands   Setup
-----
zSecure Admin+Audit for RACF - RACF - Data set Selection
Command ==> _ start panel

_ Add new DATASET profile or segment

Show dataset profiles that fit all of the following criteria
Dataset profile . . ----- 1 1 EGN mask
Owned by . . . . . (group or userid, or filter) 2 Exact
High level qual . . (qualifier or filter) 3 Match
Installation data . (substring or *) 4 Any match

Additional selection criteria
_ Profile fields _ Access list _ Segment presence _ Absence
_ Audit settings

Output/run options
_ Show segments _ All _ Together _ Enable full ACL _ Specify scope
_ Show differences
_ Print format Customize title Send as e-mail
Background run Full detail form Sort differently Narrow print
Print ACL Resolve to users Incl operations Print names

```

Figure 12. Data set Selection panel

3. Specify criteria in as many fields as you like.

If nothing is entered in a field, that field is not used as a selection or rejection criterion during the database search. If you press Enter without specifying any information, all existing data set profiles are displayed, which usually results in too much data.

Dataset profile is the most important field on the Data set Selection panel. If you know the name of the profile you are looking for, you can specify the **Exact** specification. You can also specify an **EGN mask** that covers the profile, use **Match** to match the name of a data set to the profile that covers it, or look for all matching profiles (**Any match**). For example:

- Type SYS1.** and empty all other fields except **1** for **EGN mask**.

Remember that in EGN, the name pattern SYS1.* (with one asterisk) matches any name with a single qualifier that follows SYS1. If you specify SYS1.** (with two asterisks), this value matches any name with any number of qualifiers behind SYS1. For example, you can look for any profile that begins with SYS by using a filter like SYS*.**.

- Press Enter.

A panel opens showing all the data set profiles that start with SYS1 in this example. This panel is like the panel that is shown in [Figure 13 on page 17](#).

```

zSecure Admin+Audit for RACF DATASET Overview          1 s elapsed, 0.2 s CPU
Command ==> _ Scroll==> CSR_
like SYS1.**      8 Apr 2005 00:25
  Profile key      Type  UACC  Owner  S/F  W
-- SYS1.ACDS      GENERIC NONE  SYSPROG  U_R  -
-- SYS1.BROADCAST  GENERIC UPDATE  SYSPROG  _R  -
-- SYS1.COMDLIB    GENERIC READ  SYSPROG  U_R  -
-- SYS1.COMMDS     GENERIC NONE  SYSPROG  U_R  -
-- SYS1.C#M.LINKLIB  GENERIC NONE  SYSPROG  U_R  -
-- SYS1.CSSLIB     GENERIC NONE  SYSPROG  U_R  -
-- SYS1.DFQLLIB    GENERIC NONE  SYSPROG  U_R  -
-- SYS1.DGTLIB     GENERIC NONE  SYSPROG  U_R  -
-- SYS1.DUMP*.**   GENERIC NONE  SYSPROG  R_R  -
-- SYS1.HASPACE    GENERIC NONE  SYSPROG  R_R  -
-- SYS1.IBM.PARMLIB  GENERIC NONE  SYSPROG  U_R  -
-- SYS1.IBM.PROCLIB  GENERIC NONE  SYSPROG  U_R  -
-- SYS1.ICEDGTL    GENERIC NONE  SYSPROG  U_R  -
-- SYS1.ICEISPL    GENERIC NONE  SYSPROG  U_R  -
-- SYS1.ISAMLPALPA  GENERIC NONE  SYSPROG  U_R  -
-- SYS1.ISP*       GENERIC NONE  SYSPROG  _R  -
-- SYS1.JESCKPT*.**  GENERIC NONE  SYSPROG  R_R  -
-- SYS1.LINKLIB     GENERIC NONE  SYSPROG  U_R  -
-- SYS1.LOCAL.LINKLIB  GENERIC READ  SYSPROG  U_R  -
-- SYS1.LOCAL.VTAMLIB  GENERIC READ  SYSPROG  U_R  -

```

Figure 13. Data set profile

Other selection criteria are available:

- Best match result

- a) To exit the data set overview and return to the data set Selection panel, press PF3.
- b) In the **Dataset profile** field, type SYS1.DUMP00 and select **3** for **Match** and press Enter.

A panel similar to the one shown in [Figure 14 on page 18](#) opens showing the profile best matching SYS1.DUMP00.

```
zSecure Admin+Audit for RACF DATASET Overview          1 s elapsed, 0.4 s CPU
Command ==>----- Scroll==> CSR_
exact match SYS1.DUMP00                                8 Apr 2005 00:25
  Profile key                                           Type      UACC      Owner      S/F W
  __ SYS1.DUMP*.**                                     GENERIC NONE___ SYSPROG_ R_R _
***** BOTTOM OF DATA *****
```

Figure 14. Best match result

- Any match result

- a) To exit the data set overview and return to the data set Selection Panel, press PF3.
- b) In the **Dataset profile** field, leave the SYS1.DUMP00 value and select **4** for **Any match** and press Enter.

A panel similar to the one shown in [Figure 15 on page 18](#) opens showing all profiles that match SYS1.DUMP00. The best-fitting profile is shown in the top line. In addition, less specific profiles are shown that might match the resource, if the top profile was deleted.

```
zSecure Admin+Audit for RACF RACF DATASET Overview      1 s elapsed, 0.5 s CPU
Command ==>----- Scroll==> CSR_
any match SYS1.DUMP00                                  8 Apr 2005 00:25
  Profile key                                           Type      UACC      Owner      S/F W
  __ SYS1.DUMP*.**                                     GENERIC NONE___ SYSPROG_ R_R _
  __ SYS1.*.***                                       GENERIC NONE___ SYSPROG_ U_R _
***** BOTTOM OF DATA *****
```

Figure 15. Any match result

- In addition to the mask and matching selection options, other selection criteria are available. These criteria can be useful when you are searching for specific types of data set profiles. For example:
 - a) Press PF3 to return to the data set Selection panel.
 - b) Type / in the **Profile** fields in the **Additional selection criteria** area. This action opens another panel so that you can specify more selection criteria.

Listing profiles in warning mode

About this task

Warning mode means that all accesses are permitted, but a warning message is issued if the access typically results in a violation. Warning mode is usually a temporary measure because it permits any action on data sets covered by the profile. To list all the profiles that are in warning mode, complete the following steps:

Procedure

1. Ensure that there is a / next to the **Warning mode** field and remove the selection (/) next to the **No warning** field. Press Enter.

The display lists all profiles that are in warning mode. Your search can be more specific, such as HLQ=PAYROLL and Warn mode.

2. Press PF3 to return to the Data set Selection panel.

3. Try entering PROD.** or something meaningful for your installation in the **Dataset profile** field and = 3 (READ) in the **UACC or ID(*)** selection field.

This field is in the same panel where earlier you selected the warning mode.

4. Reapply the / next to the **No warning** field in the inclusion criteria section and press Enter.

This action produces a list of production data sets that any user can read.

5. Press PF11.

This action shows more fields such as the **ERASE (E)** field. If a profile has the RACF **ERASE ON SCRATCH (EOS)** attribute, then any data set that is protected by the profile is physically erased to ensure data confidentiality when it is deleted.

6. Use the **S** line command or move the cursor to the beginning of any displayed data line to obtain the details for that particular profile.

Note: Many lines in the displays can be expanded. Enter an **S** in the first field of the line or position the cursor in the first field and press Enter.

Displaying discrete profiles

Procedure

1. Return to the Data set Selection panel.
2. Erase the **Dataset profile** field.
3. Type a / before **Profile fields** in the **Additional selection criteria** section. Press Enter.
4. Make sure that nothing is filled in for the **UACC or ID(*)** field.
5. Check that there is a / in the **Discrete** selection field in the Data set Selection panel.
6. Remove the / from the **Generic selection** field. Leave all other selection criteria as they are and press Enter.

This action produces a list of all existing discrete data set profiles.

Tip: Remember that zSecure Audit for RACF uses the **AND** function when you specify multiple properties.

Displaying the access control list (ACL)

About this task

The next steps open a list of data set profiles. Select a specific profile to obtain detailed information, like the access control list (ACL), information related to each entry in the ACL, and some of its characteristics. Select a data set profile that you know has multiple, complex usage permissions in your RACF database. You can use wildcard characters to specify the selection criteria. The following examples select data set profiles with a name pattern that matches SYS1.** as an example, but use one that is appropriate for your installation. In the data set Selection panel, complete the following steps:

Procedure

1. Type the profile name in the **Dataset profile** field.
2. Type a / next to the **Enable full ACL** field in the **Output/run options** section.
3. Press Enter to open the list of all matching profiles.
4. Select the most complex data set profile from the list.
5. Type an S line command for that line. Press Enter.

If you enter S on an empty line, it inserts a new entry.

```

zSecure Admin+Audit for RACF DATASET Overview                               Line 1 of 33
Command ==> ----- Scroll==> PAGE
any matching SYS1.PROCLIB                                                6 Oct 2009 03:31

- Identification                                                         SYS1
- Profile name                  SYS1.PROCLIB
- Type                         GENERIC
- Volume serial list
- Effective first qualifier    SYS1                                     MOST SUPERIOR GRO
- Owner                        SYSPROG                               SYSTEM PROGRAMMIN
- Installation data
-----
User   Access  ACL id  When          RI Name          DfltGrp
- - - - -
- -group- ALTER  SYSPROG
- -group- READ   SYS1
-----

Safeguards
Erase on scratch          No      Other permissions
Audit access success/failures U R    Allow all accesses    WARNING No
Global audit success/failures ---    Universal access authority READ
User to notify of violation -----
Days protection provided #  -----
Resource level            0

```

Figure 16. Normal ACL

In [Figure 16 on page 20](#) you can see that in this case the ACL contains only group entries.

Access control list formats

In RACF, you can easily have multiple, inconsistent access permissions for a resource. For example, you can have read permission through a group to data set XXX . You can also belong to another group that has update permission to XXX. RACF grants the user the highest access level available in such multiple permissions. In our example, the user would have update authority.

Additionally, a specific user permit takes precedence. RACF resolves multiple access permissions to determine the operative permission. zSecure Admin and Audit can display resolved permissions, or it can display exploded permissions, showing all permissions that exist. The resolved permission is the only one that counts for granting access to a resource. An exploded list is vital in trying to determine why a user has a certain level of access to a resource. By default, zSecure Admin and Audit displays the access control list exactly as RACF would display it, but ordered by groupid or userid and including the userid, programmer name, and installation data.

To show a list of all users that are connected to these permitted groups and any user who has permission by other reasons, type ACL EXPLD or ACL X in the command line. This command opens an exploded list (which might be more than one line per user) showing those users with access to this profile. The detailed display indicates which access control list entries provide what level of access for the users.

All users with access to the data set are displayed, along with their connect group; see [Figure 17 on page 21](#). Even access through system-wide and group-**OPERATIONS** is indicated.

```

zSecure Admin+Audit for RACF DATASET Overview                               Line 1 of 63
Command ==> ----- Scroll==> PAGE
any matching SYS1.PROCLIB                                           6 Oct 2009 03:31

```

```

- Identification                                                    SYS1
- Profile name              SYS1.PROCLIB
- Type                      GENERIC
- Volume serial list
- Effective first qualifier  SYS1                                MOST SUPERIOR GRO
- Owner                     SYSPROG                             SYSTEM PROGRAMMIN
- Installation data
-----
  User   Access  ACL id  When      RI Name      DfltGrp
- C#MBERT ALTER  SYSPROG          BERT JOHNSON SYSPROG
- C#MBERT READ   SYS1           BERT JOHNSON SYSPROG
- CRMBFT1 ALTER-0 - oper -   FRANK TRATORRIA SPEC. SYSPROG
- CRMBFT1 ALTER  SYSPROG          FRANK TRATORRIA SPEC. SYSPROG
- DEPT2  READ   SYS1           USR =QA OW=DEPT  USR =QA CN
- DFHSM  READ   SYS1

```

Figure 17. Exploded ACL

In Figure 17 on page 21, the line:

```

- CRMBFT1 ALTER-0 - oper -   FRANK TRATORRIA SPEC. SYSPROG

```

shows an example where access is granted because the user has **OPERATIONS** authority. The following line shows that the user DEPT2 is connected to group SYS1 and has READ access on the data set profile.

```

DEPT2  READ   SYS1           USR =QA OW=DEPT  USR =QA CN

```

A user can have multiple access rights to the same data set profile through different paths. A line is shown for each of a user's access rights and group connections. For example, as Figure 17 on page 21 shows, user C#MBERT is displayed in two different lines because this user is connected to group SYS1 and has READ access and this user is also connected to group **SYSPROG** and has **ALTER** access.

Tip: Avoid the **EXPLODE** option. The **SORT** option is best for general use.

To show only the highest level that a user has, use these ACL commands:

- Type **ACL RESOLVE (R)** in the command line.

A list is displayed showing only one entry for each user, indicating exactly what access each user has. Be aware, however, that access with the system-wide and group-OPERATIONS attribute is not included in the resolved overview display.

- Type **ACL EFFECTIVE (F)** in the command line.

A list is displayed showing only one entry for each user, indicating exactly what access each user has. The list, however, also includes users who have access because they possess the OPERATIONS attribute.

- Type **ACL SORT ACCESS** in the command line.

A list is displayed showing the access control list by descending access level and for each access level by user ID. See Figure 18 on page 22.

```

zSecure Admin+Audit for RACF DATASET Overview                               Line 1 of 44
Command ==> ----- Scroll==> CSR
like SYS1.**                                                                8 Apr 2005 12:17

- Identification                                                         DEMO
- Profile name                  SYS1.PROCLIB
- Type                         GENERIC
- Volume serial list
- Effective first qualifier     SYS1                MOST SUPERIOR GRO
- Owner                        SYSPROG             SYSTEM PROGRAMMIN
- Installation data
-----
  User    Access  ACL id  When      RI  Name              InstData
- C#MBERT  ALTER  SYSPROG
- C#MBMR1  ALTER  SYSPROG          M RONTEL          AAAAAAAAAA
- R#SLIN   ALTER  SYSPROG          BERT JOHNSON SPEC.
- SYSPSTC  ALTER  SYSPROG          STC USER SYSPROG
- CNRUNL   READ   SYS1          JUST A USER TO BE US
- DEPT     READ   SYS1          USR =QA OW=SYS1    USR =QA CN
- DEPT1    READ   SYS1          USR =QA OW=DEPT    USR =QA CN
- DEPT2    READ   SYS1          USR =QA OW=DEPT    USR =QA CN
- DFHSM    READ   SYS1

```

Figure 18. Effective ACL

The **ACL EFFECTIVE** command shows you the effective access that individual users have, including access through system and group operations. If you also want to include ownership rights through owner, qualifier, or group-SPECIAL, you can toggle it on and off by using the commands **ACL SCOPE** and **ACL NOSCOPE**. If you want to see access rights and ownership rights separately but still resolved, you can specify **ACL TRUST** instead of **ACL EFFECTIVE**.

Tip: To print a display, go to the command line and type **PRT**. This command prints the current display. It includes the full report width, which can be wider than the screen of the typical user, and the higher-level information that leads to this panel. The printed output is placed in your ISPF LIST data set. When you exit ISPF, remember to print this data set. If you want to print the ISPF LIST data set without leaving ISPF, enter **LIST** in the command line and select your printing options in the displayed panel.

Access list display settings

This brief discussion of resolve and explode is an important feature for you to remember. You can change the layout of the access control list in these ways:

- Use **Option 5** from the Setup panel to access the Setup View panel.
- Type **SET** in the Command area of an access control list display.
- Type an **ACL RESOLVE**, **ACL EXPLODE**, or **ACL EFFECTIVE** command in the Command area of an access control list display.

The first two methods remember the new mode for future use. The last method changes only the current display.

For more information about changing the access list display settings, see:

- [“Changing the access list display settings from the Setup View panel” on page 22](#)
- [“Changing the access list display settings from the Setup panel” on page 23](#)

Changing the access list display settings from the Setup View panel

Procedure

1. Type **SETUP VIEW** in the command line to open the Setup View panel that is shown in [Figure 19 on page 23](#).

```

Menu  Options  Info  Commands  Setup
-----
zSecure Suite - Setup - View
Command ==> -----
Access list format . . . . 2  1. No      3. Explode  5. Effective
                             2. Sort    4. Resolve

ACL/Connect sort . . . . 2  1. Id      2. User    3. Access

Show OS-specific options  /  z/OS      _  z/VM

/  Add user/group info to view (uses additional storage, normally on)
/  Add summary to RA displays for multiple RACF sources (normally on)
_  Add connect date and owner to RA.U/RA.G connects section
_  Show complete subsystem class information for RA.S (reads entire CKFREEZE)
_  Application segments in RA.Q (normally off)

Select view
3  1. View only profiles that you are allowed to change (administrator view)
   2. View all profiles that you are allowed to change or list
   3. View all profiles (normal view)

```

Figure 19. Setup View panel

2. In the **Access list format** field, specify option 5.
3. Press PF3 to ACCEPT the new value. The value is in effect the next time you do a query. From now on, you see only one line for each user. This line represents the effective access level for each user.

The resolve or explode display level that you set is in effect until you change it. The Setup View panel is one of the Setup panels. You can also access it through the Setup menus.

Changing the access list display settings from the Setup panel

Procedure

1. Return to the Main menu by using PF3.
2. Select option **SE** (Setup).
3. Select option **5** (View).

Tip: Instead of typing these commands, you can also type =SE . 5 in the command line to go immediately to the Setup View panel.
4. To change the Access control list format back to **SORT**, type 2 in the **Access list format** field.

The Sort format is the most appropriate format for general use.
5. Press PF3 to exit the panel.

Checking access to resources with the Access command

About this task

Note: This command is applicable only for the zSecure Admin product.

You can use the Access function **RA.1** or the ACCESS primary command to see the data sets or resources (and RACF profile) to which a specific user or group has access. The Access function gives information about which profile covers the resource, and the resulting access for the user, after you provide the following information:

- User ID
- Resource class
- Data set name, resource name, or profile name

```

Menu  Options  Info  Commands  Setup
-----
zSecure Admin - RACF - Access Check
Command ==> -----
Id  . . . . . IBMUSER_
Specify profile for Access Check
Class . . . . . DATASET_ (DATASET or class)
Profile . . . . . SYS1.LOADLIB_____ (EGN mask)

```

Figure 20. Access check entry panel

Procedure

1. In the **Id** field, type the user ID or group ID.
2. Specify the resource class (data set or a general resource class name) and the data set name, resource name, or profile name in the **Profile** field. Press Enter.

The Access check detail panel (Figure 21 on page 24) shows the access level that RACF grants to this ID and from which profile the access is determined.

```

Menu  Utilities  Compilers  Help
-----
BROWSE  IBMUSER.CKRACF1.SDEMO.CKXOUT          Line 00000000 Col 001 080
Command ==> ----- Scroll ==> CSR_
***** Top of Data *****
CKGRACF ACCESS IBMUSER DATASET SYS1.LOADLIB
CKG582I 00 IBMUSER has ALTER access to DATASET SYS1.LOADLIB
        profile DATASET SYS1.**
***** Bottom of Data *****

```

Figure 21. Access check detail panel

Administration of access rights

There are several ways to administer the access control list of a data set profile:

- Issue the **PE** (permit) line command in the data set profile Overview panel.
- Use a **C** (copy), **D** (delete), **I** (insert), **R** (repeat), or **S** (modify) line command in the data set profile detail panel.
- To change a value, type over the current value in the access control list.

When you change the values, **Permit** and **Permit Delete** commands are generated to add the new value and remove the value that was overwritten.

If you do not want to run the **Permit Delete** command, remove it from the command confirmation panel before you press Enter. Press Enter again in the next panel (zSecure Admin – Confirm command) to process your **Permit** command. Do not run the RACF commands now.

Creating digital certificates templates

Use this task to create digital certificate templates and new certificates and to specify criteria for viewing certificates.

About this task

Use menu option **SE.9** to create digital certificate templates. Use the defined templates to generate new certificates (options RA.5.2 and RA.5.3), or to select the criteria for the display of certificates (option RA.5.1). On the definition panels, use the **F** selection fields to fix the value for a field. When you fix the value, that value cannot be changed when the template is used to generate a certificate.

Procedure

1. On the main menu, type SE (Setup) in the Option line and press **Enter**.
The Setup menu is displayed.

Menu	Options	Info	Commands	Setup
Startpanel				

zSecure Suite - Setup				
Option ==> -----				
				More: +
0	Run	Specify run options		
1	Input files	Select and maintain sets of input data sets		
2	New files	Allocate new data sets for UNLOAD and CKFREEZE		
3	Preamble	CARLa commands run before every query		
4	Confirm	Specify command generation options		
5	View	Specify view options		
6	Instdata	Customize installation data appearance		
7	Output	Specify output options		
8	Command files	Select and maintain command library		
9	Certificates	Specify templates for new digital certificates		
B	Collections	Select and maintain collections of input sets		
U	User defined	User defined input sources		
N	NLS	National language support		
T	Trace	Set trace flags and CARLa listing for diagnostic purposes		
D	Default	Set system defaults		
R	Reset	Reset to system defaults		
I	Installation	Specify installation defined names		

Figure 22. Setup menu

2. On the Setup menu, type 9 in the Option line and press **Enter**.
If no templates are defined when you select this option, the Setup certificates template definition panel is displayed.

Menu	Options	Info	Commands	Setup

zSecure Suite - Setup - Certificates				
Command ==> -----				
Name for template -----				
Description -----				
F Enter the following defaults for the new certificate:				
-	Certificate label prefix	-----		
-	Certificate type	1. Site 2. Certauth 3. Personal		
-	Size of new private key	(Default 1024 for RSA/DSA; 192 for ECC)		
-	Start validity date	(yyyy-mm-dd, default is today)		
-	Start validity time	(Default is 00:00:00)		
-	End validity date	(yyyy-mm-dd, nYEAR, default 1YEAR)		
-	End validity time	(Default is 23:59:59)		
F Enter the following defaults for the Signing Authority:				
-	Digital certificate label	-----		
-	Signing certificate type	1. Site 2. Certauth 3. Personal 4. Self		
Optional actions				
		1. Connect to key ring		
		2. Export certificate		
		3. Generate certificate request		
Press ENTER to continue or END to exit				

Figure 23. Setup certificates template definition panel

For descriptions of the fields on this panel and all subsequent panels, use the field-sensitive help function (PF1).

3. Press **Enter**.
The following panel is displayed:

Menu	Options	Info	Commands	Setup
zSecure Suite - Setup - Certificates				
Command ==> _____				
Name for template MQ				
Description MQ certificate template				
F Enter the following defaults for the new certificate:				
-	Key usage	- Handshake	- Docsign	- Keyagree
		- Data encrypt	- Certsign	
Select the key type to be generated:				
-	1. RSA(default)			
-	2. RSA Modulus-Exponent in PKDS			
-	3. DSA			
-	4. NIST ECC			
-	5. Brainpool ECC			
-	1. Store in PKDS with an optional PKDS label or * (types 1,2,4, and 5)			
-	2. Store in TKDS using existing TKDS token (types 1,4, and 5):			
Press ENTER to continue or END to return to previous panel				

Figure 24. Setup certificates template definition panel

4. Press **Enter** to display the next panel:

Menu	Options	Info	Commands	Setup
zSecure Suite - Setup - Certificates				
Command ==> _____				
Name for template MQ				
Description MQ certificate template				
F Enter the Subject's X.509 Distinguished Name:				
Common Name: (ex: 'John Q. Public')				
Title: (ex: 'Systems Programmer')				
-	Organizational Unit: (ex: 'S390','MVS')			
-				
-	Organization: (ex: 'IBM')			
-	Locality: (ex: 'Poughkeepsie')			
-	State/Province: (ex: 'New York')			
-	Country: (ex: 'US')			
Press ENTER to continue or END to return to previous panel				

Figure 25. Setup certificates template definition panel

5. Press **Enter**.

The following panel is displayed:

Menu	Options	Info	Commands	Setup

zSecure Suite - Setup - Certificates				
Command ==> -----				
Name for template MQ				
Description MQ certificate template				
F Enter the subjectAltName extension:				
Enter the IPv4 or IPv6 address				

Enter the internet domain name				

Enter the fully qualified email address				

Enter the universal resource identifier				

Press ENTER to continue or END to return to previous panel				

Figure 26. Setup certificates template definition panel

6. If you select option **Connect to key ring** on Figure 23 on page 25, the following panel is displayed:

Menu	Options	Info	Commands	Setup

zSecure Suite - Setup - Certificates				
Command ==> -----				
Name for template MQ				
Description MQ certificate template				
F F Enter key ring data				
- - Connect to key ring				
- - Key ring name -----				

- - Key ring owner -----				
- - Use as default certificate - (Y/N)				
- - Certificate usage - 1. Installed usage (default)				
2. Use as a PERSONAL certificate				
3. Use as a CERTAUTH certificate				
4. Use as a SITE certificate				

Figure 27. Setup certificates template definition panel

7. After the template is defined, the following panel is displayed:

Menu	Options	Info	Commands	Setup

zSecure Suite - Setup - Certificates Row 1 to 1 of 1				
Command ==> -----				
Select certificate template (E (edit), B (browse), I (insert), C (copy), D (delete))				

Name	Description			Type
- MQ	MQ certificate template			User

***** Bottom of data *****				

Figure 28. Setup certificates template definition panel

You can use the following action commands:

- B** Allows browsing through the existing definitions.
- C** Create a new template based on an existing template.

- D** Shows a confirmation panel before deleting the template.
- E and I** Shows the certificate definition panel.

Working with certificates, key rings, filters, and tokens

Use the guidelines and steps in this task to manage certificates, key rings, filters, and tokens.

About this task

Digital certificates are used for authentication, verification, encryption, etc. A certificate typically contains a description of the subject, a public and/or private key, and a signature of a “trusted party.”

The RACDCERT command is complex. For example, it has 25 primary options and some functions require multiple commands. zSecure uses the standard zSecure interface: select-display-action and action via line commands and overtyping. It also provides options to directly create new objects.

Most parameters are verified before RACDCERT is run and the last specified parameters are retained for easy correction. You can use templates to specify default values; zSecure also includes two default templates:

None
Use empty fields.

Previous
Use options from last time.

Use the RA.5 (RACDCERT) menu to work with digital certificates, key rings, filters, and tokens.

Procedure

Press PF3 until you are on the Main menu. Select RA.5 to display the RACDCERT menu.

Menu	Options	Info	Commands	Setup
Startpanel				

zSecure Suite - RACF - RACDCERT				

Option ==>>	-----			
1	Certificates	Work with digital certificates		
2	Generate	Generate new certificate and a public/private key pair		
3	Sign	Generate new certificate using an existing public key		
4	Add	Add or update existing digital certificate		
5	Check	Check whether digital certificate has been added to RACF		
6	Key rings	Work with key rings		
7	Name filtering	Work with certificate name filters		
8	Tokens	Work with tokens		
9	Criteria	Work with certificate mapping criteria		

Figure 29. RACDCERT menu

The options on this panel are briefly explained here. For more details on the RACDCERT function, see the section on RA.5 in the *IBM Security zSecure Admin and Audit for RACF: User Reference Manual*. When you select an option, the subsequent panel is displayed. For a description of the fields on these panels, use the field-sensitive help function.

On the subsequent details displays, you can select any row to see the full detail view. You can select details by putting the cursor on the first character of the row selection field and pressing Enter, or by explicitly typing S there and pressing Enter.

RA.5.1 Certificates - Work with digital certificates
Use option **RA.5.1** to select and perform actions on digital certificates. The following panel is displayed:

Menu	Options	Info	Commands	Setup
zSecure Suite - RACDCERT - Certificates				
Command ==> -----				
Show certificates that fit all of the following criteria:				
Certificate type/owner	_ Site	_ Certauth	_ Personal	-----
Trust	_ TRUST	_ NOTRUST	_ HIGHTRUST	
Start validity	--	(operator: > >= < <= = <> ^=)		
End validity	--	(date: yyyy-mm-dd/ddMMMyyyy/		
Creation date	--	TODAY/TODAY-nn/TODAY+nn)		
Complex	-----	(complex or filter)		
_ Match on template				
Additional selection criteria				
_ Other fields	_ SubjectsDN	_ IssuersDN	_ subjectAltName	
_ Signing algorithm				
Output/run options				
_ 0. No summary	1. Summary by owner			
_ Show differences				
_ Print format	_ Customize title	_ Send as e-mail		
_ Background run	_ Full page form	_ Sort differently	_ Narrow	
print				

Figure 30. Digital certificates selection panel

Use the Match on template option to match certificates to a template defined with SETUP (DEFAULT) CERTIFICATES. A panel is displayed in which you select a template. The selection fields on the certificate panels are pre-filled with the values of the selected template. [Figure 31 on page 29](#) shows a sample digital certificate display.

zSecure Suite DIGTCERT CERTDATA segments						
Command ==>			Scroll==> CSR			
All certificates			27 Mar 2013 09:14			
User	Digital certificate labels		Tru	Cert. sta	Cert. end	Complex
-- irrcerta	Entrust	Secure Server Root CA	No	25May1999	25May2019	PROD
-- irrcerta	Entrust.net	Secure Server CA	No	21Aug2001	1Jan2006	PROD
-- irrcerta	Equifax	Secure CA	No	22Aug1998	22Aug2018	PROD
-- irrcerta	GTE CyberTrust	Root CA	No	23Feb1996	23Feb2006	PROD
-- irrcerta	Identrus	Interoperability CA	No	8Feb2000	5Feb2010	PROD
-- irrcerta	Integrion	CA	No	20May1997	20May2017	PROD

Figure 31. Digital certificates tabular display panel

You can use several line commands:

- BI - Bind certificate to token**
Bind a RACF Certificate to an existing token.
- CO - Connect certificate to key ring**
Connect a certificate to a key ring.
- EX - Export certificate**
Write a digital certificate to a data set.
- GR - Generate certificate request**
Create a PKCS #10 Base64-encoded certificate request that is based on the specified certificate or to write the request to a data set.
- LC - RACDCERT LISTCHAIN for certificate**
issue a RACDCERT LISTCHAIN command. The command results in a listing of certificate information about a certificate that is owned by a user ID, SITE or CERTAUTH, and its issuers' certificates owned by CERTAUTH in a chain of certificates.
- RK - Rekey certificate**
Replicate (rekey) a digital certificate with a new public/private key pair. In general, after you rekey a certificate, issue the RO action command to supersede the old certificate with the new rekeyed certificate and retire the old private key.

RO - Rollover certificate

Supersede one certificate (source certificate) with another certificate (target certificate). In general, issue the RO action command after you issue the RK action command to supersede an old, expiring certificate with a new rekeyed certificate or to retire the private key of the expiring certificate.

UB - Unbind certificate from token

Unbind a RACF certificate from an existing token.

RA.5.2 Generate - Generate new certificate and a public/private key pair

Use this menu option to generate a new certificate and a public/private key pair. First, the template selection panel is displayed. This panel shows the templates that are defined with SETUP CERTIFICATES and these defaults:

None

Clears all fields on the GENCERT panel

Previous

Uses the values entered the last time

RA.5.3 Sign - Generate new certificate using an existing public key

Use this menu option to generate a new certificate that uses an existing public key.

RA.5.4 Add - Add or update existing digital certificate

Use this menu option to define a digital certificate by using a certificate or certificate package that is contained in the specified data set.

RA.5.5 Check - Check whether digital certificate has been added to RACF

Use this option to evaluate whether the digital certificates in the specified data set were added to the RACF database and associated with a user ID. A data set name that is enclosed in quotes must be entered. If the certificate in question is in PKCS12 format, a password is also required.

RA.5.6 Key rings - Work with key rings

Use this menu option to work with key rings. If you leave this panel empty and press **Enter**, all key ring records are displayed.

```
zSecure Suite Key rings display                               Line 1 of 10
Command ==> ----- Scroll==> CSR
All key rings                                           12 Mar 2013 06:00
  Owner      Key ring name      #Cert Createdat
-- CRMQA401  ER80810            0 06Jul2001
-- CRMQA402  ER80810            1 06Jul2001
-- TCPSRV    telnetSSL          2 28Nov2007
***** Bottom of Data *****
```

Figure 32. Key ring overview

RA.5.7 Tokens - Work with tokens

Use this menu option to work with tokens. If you leave this panel empty and press Enter, all token records are displayed. [Figure 33 on page 30](#) shows a sample Tokens tabular display:

```
zSecure Suite Tokens display                               Line 1 of 1
Command ==> ----- Scroll==> CSR
All tokens                                           15 Mar 2013 03:12
  Token      Sequence Complex Manufacturer
-- FIRSTTESTOKEN 00000001 ADCDPL  ICSF PKCS11 token browser
***** Bottom of Data *****
```

Figure 33. Tokens overview

You can use the following line commands:

BI - Bind certificate to token

Bind a RACF Certificate to an existing token.

D - Delete token

Generate a RACDCERT DELTOKEN command.

L - List token

Generate a RACDCERT LISTTOKEN command.

UB - Unbind certificate from token

Unbind a RACF certificate from an existing token.

RA.5.8 Name filtering - Work with certificate name filters

Use this menu option to work with certificate name filter rings. [Figure 34 on page 31](#) shows a sample name filters display:

```
zSecure Suite Certificate name filters
Command ==> ----- Scroll==> CSR
All name mappings 12 Mar 2013 06:00
Certificate filter name (issuer and subject name separated by @)
-- @OU=CRM.O=Consul Risk Management
-- @OU=Sysprog.OU=CRM.O=Consul Risk Management
-- OU=CICS Individual Subscribers.O=Verisign,Inc.L=Internet@
-- OU=VeriSign Class 1 Individual Subscribers.O=Verisign,Inc.L=Internet@OU=Sysp
***** Bottom of Data *****
```

Figure 34. Name filters overview

RA.5.9 Criteria - Work with certificate mapping criteria

Use this menu option to work with certificate mapping criteria. [Figure 35 on page 31](#) shows a sample criteria display:

```
zSecure Suite Certificate mapping criteria 1 s elapsed, 0.2 s CPU
Command ==> ----- Scroll==> CSR
All criteria 12 Mar 2013 06:00
Criteria
-- APPLID=CICSA CRMQA205 CRMBMR1 14Apr2000 0 DI
-- APPLID=CICSB CRMQA206 CRMBMR1 14Apr2000 0 DI
***** Bottom of Data *****
```

Figure 35. Criteria overview

Comparing users

About this task

Often users ask a question such as, “Why does this function not work for me, while it does for my neighbor? I thought we were supposed to have the same access to that product?” You can use zSecure Admin and zSecure Audit for RACF for quick comparison of the access and connect status for up to four users.

To compare the access and connect status of users, complete the following steps:

Procedure

1. Press PF3 until you are on the Main menu.
2. From the Main menu, select option **REPORTS (RA.3)** from the RA panel. Select option **G Compare users** from the resulting panel to open the Compare users panel that is shown in [Figure 36 on page 32](#).

```

Menu  Options  Info  Commands  Setup
-----
zSecure Admin+Audit for RACF - Reports - Compare users
Command ==>

Enter up to 4 userids to compare access and/or connects
Userid  . . . . -----

Select report(s)
/ Compare access through user-specific permits
  _ Include group permits
/ Compare connects
_ Output in print format

```

Figure 36. Compare users panel

On this panel, you can specify up to four users and the exact comparisons that you want to do. Up to two reports are generated: one for permits, and one for group connects.

Example

The Permit report is presented in three layers:

- The classes for which permits are present with the highest access of each user to any profile in that class.
- The profiles in the selected class with the highest access.
- A list with all permits for the selected users on a specific profile.

This detailed display also shows the information from the higher layers for this one specific entry, as shown in [Figure 37 on page 32](#).

```

Compare PERMITs for users
Command ==> -----
                                                    Line 1 of 2
                                                    Scroll==> CSR
                                                    10 Oct 2006 00:07

Class    Profiles C#MBDV1 C#MBDV2
DATASET      32 ALTER  ALTER
Profile key
C#MA.D.HLLDV1.PADS.**          C#MBDV1 C#MBDV2
                                READ    ALTER
Scope of Access Via      When
-- C#MBDV1 READ  CR#BDV1  PROGRAM  CKRCARLA
-- C#MBDV2 ALTER  CR#BDV2
***** Bottom of Data *****

```

Figure 37. Compare permits detail panel

The connect report shows a matrix of all groups to which at least one of the users is connected, as shown in [Figure 38 on page 32](#):

```

Compare CONNECTs for users
Command ==> -----
                                                    Line 1 of 6
                                                    Scroll==> CSR
                                                    10 Oct 2006 00:07

Group    C#MBDV1 C#MBDV2
-- C#MARACF No    Yes
-- C#MB    Yes    Yes
-- C#MBREAD Yes    Yes
-- C#MBZDEV Yes    Yes
-- C#MCKG  No    Yes
-- C#MGRACF Yes    Yes
***** Bottom of Data *****

```

Figure 38. Compare connects matrix

Chapter 3. Administration of users and profiles

Note: This section is applicable only for the zSecure Admin product.

Using zSecure Admin, you can change RACF data in the following ways:

- You can change a value by typing over the existing value in a field on a profile display.
- You can use line commands in a profile display, like **C** (Copy), **D** (Delete), **R** (Re-create), **L** (list), and **SE** (Segments).
- You can use the Mass Update panels.
- You can submit foreground or background RACF commands that are automatically generated by various **Report** and **Verify** functions.
- You can use the distributed functions, described in [Chapter 4, “Distributed and scoped administration functions,”](#) on page 43.

Typing over a value, line commands, and Mass Update are controlled by the **Confirmation** setting in the Setup - Confirm panel. See “[Generating and confirming RACF commands](#)” on page 33. The Confirm panel enables or disables the **Overtyp**e function and determines what verification is required before you run a RACF command that changes the database. You can set the **Confirmation** control as you want. However, until you are familiar with routine product usage, use the setting **ALL** or **PASSWORDS**.

Generating and confirming RACF commands

Procedure

1. Select option **SE** (Setup).
2. Select **option 4** (Confirm) to open the Confirm panel that shows the current settings, as shown in [Figure 39 on page 33](#).

```
Menu  Options  Info  Commands  Setup
-----
zSecure Admin+Audit for RACF - Setup - Confirm
Command ===> -----

Action on command . . 2  1. Queue 2. Execute  3. Not allowed
                        _ Execute display commands (for option 1 only)
Confirmation . . . . 4  1. None  2. Deletes  3. Passwords  4. All  5. Add
Command Routing . . . 3  1. Ask   2. Normal  3. Local only

Command generation
Enter "/" to select option(s)
/ Overtyp fields in panels
/ Change generated commands
/ Specify start/end date
/ Generate SETROPTS REFRESH commands
/ Issue prompt before generating SETROPTS REFRESH commands

Commands to generate
/ RACF commands
/ CKGRACF commands
/ CKGRACF ASK for later execution
/ CKGRACF REQUEST for later execution
- CKGRACF WITHDRAW queued commands
- CKGRACF RDELETE queued commands
```

Figure 39. Confirm panel

3. Set the **Action on command** field to **2** (Execute).
4. Set the **Confirmation** field to **4** (All).
5. Set the **Command Routing** field to **3** (Local only).
6. Set **Overtyp fields in panels** to **/**.

This option is used in the following examples. Leave all other settings as they are, especially in the **Commands to generate** section.

Tip: You can also switch modifiable fields on and off by entering the **MODIFY** command (or just **M**) in the command line of any profile display.

7. Press PF3 to accept the changed parameters.

8. Press PF3 again to return to the Main menu.

Tip: You can always reach the Confirm panel by typing `SETUP CONFIRM` or `=SE.4` in the command line of any panel.

What to do next

If you want to manage the RACF database from zSecure Admin by using your user ID, you must have the correct authority for the RACF database. If you are selective about attempted changes, the required authority is usually RACF SPECIAL, although group-SPECIAL might serve. An alternative is to use the **CKGRACF** program, which has its own security scheme, instead of SPECIAL authority. See [“Group administration through CKGRACF”](#) on page 44.

Command logging facility

zSecure Admin provides an option to log all RACF commands that are issued through the zSecure interface in a central repository.

The command repository is defined in a z/OS log stream. Using zSecure functions, it is possible to select and report about the recorded RACF commands. The actual recording of the commands in the log stream is done through a started task (CKXLOG) that runs on each system (LPAR) where RACF commands are run (see *zSecure CARLa-Driven Components Installation and Deployment Guide*). The record of the command can be annotated with a ticket identification and a ticket description. The zSecure Admin ISPF interface send commands to the zSecure Admin Command Logger. If you also have zSecure Command Verifier installed, to enforce RACF policies as RACF commands are entered, Command Verifier can also log commands.

When issuing commands through the zSecure ISPF user interface, the command passes several components that can request the command to be logged. Each of these components might provide its unique information that is not available otherwise. For example, when you issue a permit through CKGRACF (see [“Group administration through CKGRACF”](#) on page 44), you can specify that the permit command is to be executed at a later date. At the time that you enter the command, CKRCARLA logs it, including the scheduled date. Later, when the permit command is executed, CKGRACF logs it just before it is executed. And after execution, zSecure Command Verifier can log the command, including the return code from RACF. The Command Logger started task uses RACF profiles to control if records from a component are recorded or not.

The ISPF reporting interface (option CR.2) provides an option to suppress records for RACF commands that can also be recorded through zSecure Command Verifier. For more information about the ISPF reporting interface (option CR.2), see *zSecure Admin and Audit for RACF User Reference Manual*.

Performing a mass update

Procedure

1. Select option **RA** (RACF Administration).
2. Select **option 4** (MASS UPDATE) to open the Mass update panel that is shown in [Figure 40](#) on page 35.

What to do next

Using Options **0** to **5** from the Mass update panel, you can manage profiles at the entity level, like user and group. For example, when you delete a user, you delete not only the user profile, but also all profiles

that are related to the original user ID. Additionally, the PERMITS, CONNECTS, and the ALIAS in the master catalog are removed. All information is managed at one time. Note that, to remove an ALIAS, a CKFREEZE must be present (see “Delete a user with all references” on page 36).

```

Menu  Options  Info  Commands  Setup  StartPanel
-----
zSecure Admin+Audit for RACF - RACF - Mass update
Option ==> -----
0  Copy user      Copy existing user(s) to new user(s)
1  Copy group     Copy existing group(s) to new group(s)
2  Copy dataset   Copy dataset profile(s) to another high level qualifier
3  Copy resource  Copy general resource profile(s) to another class
4  Delete user    Delete user(s)
5  Delete group   Delete group(s)
6  Recreate user  Recreate user(s)
7  Recreate grp   Recreate group(s)
8  Recreate ds    Recreate data set profile(s)
9  Recreate res   Recreate general resource profile(s)
C  Copy CICS      Copy CICS prefixed profile(s) or member(s)

```

Figure 40. Mass update

The Mass Update panels provide many functions that are difficult to do with regular RACF commands. Some especially important points are highlighted.

Copying a user

About this task

You can clone an existing user by using the **Copy user** option (Option 0). In addition to copying the user profile, this command also copies the permits and connects of the model user. zSecure Admin also provides the option to create a user ALIAS in the master catalog.

Procedure

To copy a user, complete the following steps:

1. Select option **0** (Copy user) from the Mass Update panel to open the User Multiple copy panel, which is shown in Figure 41 on page 35.

```

Menu  Options  Info  Commands  Setup
-----
zSecure Admin+Audit for RACF - RACF - User Multiple copy
Command ==> -----
Create new user(s) like existing user(s):
Authentication _ 1. Password 2. Phrase 3. Password and phrase 4. Protected
(password phrases can be specified on a follow-on panel)
Model  New user Password Name Owner Dfltgrp Data
IBMUSER_ NEWUSER1 PSWD1_ PERSON_1_ C#MB_
=_____ NEWUSER2 PSWD2_ PERSON_2_ =_____
-----
-----
-----
-----
-----
-----
-----
-----
-----
-----
Enter = to copy value from preceding line, leave blank to copy from model.
Ticket ID .
Description _____ More _
Press ENTER to specify optional parameters.

```

Figure 41. User multiple copy panel

You can clone up to 10 users at a time, but for the evaluation, complete only the first line.

2. Enter option in the **Authentication** selection field to select whether the new userid should have a password, a password phrase, both password and phrase, or should be protected. Do not select option 2 (**Phrase** only) on z/OS systems that do not have KDFAES installed.

If you select option 2 or 3 (**Phrase** or **Password and phrase**) and press Enter, a follow-up panel is displayed so that you can enter the password phrases for the user IDs.

3. Specify the model user: Type your user ID, the new user ID, the name, and a password. Press **Enter**.

Tip: You can also use * in the password column to make the new user protected.

4. Press **Enter** in the next panel.

This panel provides the option to do the following functions for the new user:

- Omit or add more group connections.
- Copy user data.
- Revoke the new user or users.
- Create one or more catalog aliases.
- Copy one or more data sets and general resource profiles.
- Copy one or more members of RACF variables (*RACFVARS*) for the new user.

Any command necessary to create the user from the model profile is generated. After a few moments, an SPF edit panel is displayed with a complete set of RACF commands. You can scroll by using PF8 and PF7 to go forward and backward and make changes if applicable.

5. Press PF3 to quit the editor.
6. Press PF3 to skip the Result panel.

The Result panel is described in [Chapter 6, “Creating and viewing a report,” on page 61](#).

7. Press PF3 until you are back on the Mass Update panel.

Results

If the commands are run, the new user is defined exactly as the model user. You can also keep the generated commands in a data set for delayed execution.

Delete a user with all references

Use these guidelines to completely remove a user ID.

You can completely remove a user with option **RA.4.4** (Delete user), which is a tedious operation if done with regular RACF commands. Completely removing a user removes the user ID from all access control lists and owner and notify fields, in addition to removing the profile. If you allocated a CKFREEZE file, this operation also deletes the catalog alias and existing data sets for the user if you select the required options. See [Figure 56 on page 51](#).

Re-create a profile

You can re-create profiles with options **RA.4.6** through **RA.4.9** based on data in the unloaded RACF data set or a backup copy of the RACF database itself. This action can be used to repair profiles that are damaged by errors or deleted by mistake.

Merge and compare profiles

There are several other interesting features for merging RACF databases or comparing RACF databases. Merging is done by making an unloaded copy of one RACF database and by using it to change and add profiles in another RACF database. For confirming or editing, all RACF commands to be used for merging the RACF profiles are listed. This command list is a comparison of the relevant profiles in the RACF and unloaded data set. A complete merge is more complex than described here and is fully documented in the *IBM Security zSecure Admin and Audit for RACF: User Reference Manual*.

Redundant profile management

It is a good practice to regularly take a close look at the data set profiles that are defined in your RACF database. To determine which data set profiles are, or might be, obsolete, you can use the **RA.3.3** function. This function opens the Reports - REDUNDANT panel that is shown in [Figure 42 on page 37](#).

```
Menu  Options  Info  Commands  Setup
-----
zSecure Suite - RACF - Reports Non redundant
Command ==> -----
Show profiles that fit all of the following criteria:
Profile pattern . . . . . (EGN mask)
High level qual . . C#BJTI_ (qualifier or EGN mask; reduces time)
Complex . . . . . (complex name or filter)

Enter "/" to select option(s)
- Show datasets covered by each profile
  - Including datasets on scratch tapes

- Output in print format
  - Start each user or group on a new page
  - Background run
```

Figure 42. Reports - REDUNDANT panel

In the panel that is shown in [Figure 42 on page 37](#), you can specify which data set profiles or High Level Qualifier (HLQ) you want to include in the report. If these fields are left blank, all data set profiles are automatically processed. You can also specify whether you want to include the names of all data sets that are covered by the data set profiles in the report.

The Report Redundant function compares data set profile security definitions such as UACC, access control list, audit settings, and erase on scratch setting, to those of the next less specific generic data set profile.

When the security settings are not different, the profile is reported as - redundant -. This value indicates that when this more specific data set profile is deleted, the protection of the data sets is automatically taken over by the less specific generic data set profile (indicated as - candidate -) without causing any changes in the security definitions for the corresponding data sets.

```
Redundancy analysis of dataset profiles
Command ==> -----
8 Apr 2005 15:57
Line 61 of 445
Scroll==> CSR_

Complex  Timestamp  Profiles Non-redundant
DEMO      8 Apr 2005 15:57  445          364
Qual      Profiles Non-redundant
SYSA      445          364

Type  Volume  Profile name  First reason
---  ---  ---  ---
GENERIC  SYSA.D.CCW*.**  - candidate -
GENERIC  SYSA.D.CCW*.**  Extra group
GENERIC  SYSA.D.CCWSCH.**  User privileged
GENERIC  SYSA.D.CCW300.**BASELIST  - redundant -
GENERIC  SYSA.D.CCW300.**  - candidate -
GENERIC  SYSA.D.CCW300.**  Access
GENERIC  SYSA.D.CCW301.**  Access
GENERIC  SYSA.D.CCW302.**  Extra group
GENERIC  SYSA.D.CCW303.**  Access
GENERIC  SYSA.D.CCW305.**  Access
GENERIC  SYSA.D.CCW310.**  Access
GENERIC  SYSA.D.CCW311.**  Access
GENERIC  SYSA.D.CCW312.**  Extra group
```

Figure 43. Report redundant details panel

In [Figure 43 on page 37](#), the following line shows an example of a profile that can take over protection of data sets when the profile marked as - redundant - is deleted.

```
--- GENERIC      SYSA.D.CCW*.**      - candidate -
```

The following line shows an example of a profile that can be deleted because the security settings are similar to those of the candidate profile that automatically takes over protection.

```
__ GENERIC          SYSA.D.CCW300.*.BASELIST          - redundant -
```

The output of the report on redundancy is an overview of all data set profiles with an indicator in the column that is headed by **First reason**. The first reason column can contain any of the following values:

-redundant-

With the current security definitions, this profile is not required and can be removed. Protection of the data sets covered by the redundant profile is automatically taken over by a less specific data set profile (marked with - candidate -) that is displayed in the same report somewhere above the profile that is reported as a - redundant - profile.

-candidate-

This profile takes over the protection of data sets that are currently protected by a more specific generic data set profile, when the latter is deleted.

reason

This field provides a textual description to indicate why this profile differs significantly from the less specific generic data set profile and therefore is not considered redundant. Sample reason values are: Extra group, User privileged, and Access. When multiple differences exist, only the first reason is reported.

The report on redundancy can help you determine which data set profiles are now obsolete in the current RACF database.

Optionally, you can generate RACF commands to delete the profiles that are reported as - redundant -. Be aware, however, that you might not want to delete all profiles marked - redundant -. It is possible that a mistake was made at the time this data set profile was defined; that is, you or another RACF administrator forgot to activate erase on scratch or change the audit setting as intended.

Tip: The redundancy analysis can be useful to indicate any mistakes that you made during data set profile definition.

Displaying data structures

About this task

Another useful report when managing your RACF database is the Group tree report. In native RACF, the only way to display the RACF database structure is by processing the Group tree report by using the **DSMON** utility. For each requested group, this report lists all of its subgroups, all of the subgroups of subgroups, and so on. In addition, the report lists the owner of each group listed in the report, if the owner is not the superior group. Only users that have the **AUDITOR** attribute can use the **DSMON** utility. However, the **AUDITOR** attribute is not required to process the Group tree report.

In zSecure Admin, there is a standard function for processing a Group tree report. The group tree visualizes the group tree structure, similarly to how a browser displays the contents of your hard disk or network drive.

Procedure

To process the Group tree report, complete the following steps:

1. Select option **RA** (RACF Administration).
2. Select option **3.8** (Group tree) to open the Reports Group tree panel shown in [Figure 44 on page 39](#).

```

Menu    Options    Info    Commands    Setup
-----
zSecure Admin+Audit for RACF - RACF - Reports Group tree
Command ==> _ start panel

Show structured group tree display:
Group id . . . . . (group profile key or filter)
Start at . . . . . (group or filter, show only groups below)
Scope of . . . . . (group special, show only groups in scope)
Exclude . . . . . (group or filter)
Complex . . . . . (complex name or filter)

Enter "/" to include data in output
/ Installation data
/ Users/Subgroups

Enter "/" to select option
_ Output in print format

'Start at' is only allowed with an unload as data source, not a live database

```

Figure 44. Group tree selection panel

You display only a particular branch of the RACF group tree by entering a group name (or filter) in the **Start at** field. This option is available only when running with an unloaded data source. If all fields are left blank, the entire group tree for your RACF database is displayed.

- a) You can indicate that you want to include the Installation data in the group tree report by entering a / in front of **Installation data**. The Installation data is generally used to store the group description.
 - b) To include detailed information about subgroups and connected users in a detail level panel, type a / in front of the **Users/Subgroups** field.
3. Press Enter to open the Group tree report panel, which shows all groups in your current RACF database. See [Figure 45 on page 39](#).

```

zSecure Admin+Audit for RACF GROUP TREE DISPLAY          1 s elapsed, 0.5 s CPU
Command ==> _ Scroll==> CSR_
                        8 Apr 2005 16:57

Complex Groups
DEMO                267
Group structure
-- SYS1
-- BOOKS
-- C#
-- C#ADMIN
-- C#M
-- C#MBCCW
-- C#MCKG
-- C#MPC2E
-- C#MPC4R
-- C#MQ
-- C#MQA
-- C#MBQAHW
-- C#MBQAHU
-- C#MBQAH2
-- C#MBQALU
-- C#MBQAMC
-- C#MQA#HI
-- C#MQAT#1

Lvl Subgrp Connct SupGroup Owner X
1 19 11 ..... IBMUSER_ X
2 0 0 SYS1_ SYS1_
2 7 1 SYS1_ SYS1_
3 0 10 CR_ CR_
3 9 2 CR_ CR_
4 0 5 C#M_ C#M_
4 0 33 C#M_ C#M_
4 0 9 C#M_ C#M_
4 0 0 C#M_ C#M_
4 23 0 C#M_ C#M_
5 8 250 C#MQ_ C#MQ_
6 2 1 C#MQA_ C#MBWTK_ X
7 0 0 C#MBQAHW C#MBQAHW
7 0 1 C#MBQAHW C#MBWTK_ X
6 0 1 C#MQA_ C#MQA_
6 0 12 C#MQA_ C#MQA_
6 0 0 C#MQA_ C#MQA_
6 0 0 C#MQA_ R##SLIN_ X

```

Figure 45. Group tree report panel

In the Group tree report panel shown in [Figure 45 on page 39](#), the X in the X column indicates a scope break for group special users. This break is indicated because owner is not equal to the superior group.

4. If you requested Installation data, press PF11 to review the information.
5. Press PF8 a few times to look at more parts of the group tree structure.
6. If detailed information was included in the report and you want to view it, enter the **S** line command in front of a group. This action opens the Group tree report detail panel shown in [Figure 46 on page 40](#).

```

zSecure Admin+Audit for RACF RACF GROUP TREE DISPLAY                               Line 1 of 11
Command ==> ----- Scroll==> CSR_
                                     8 Apr 2005 16:58
      Group structure                                Lvl Subgrp Connct SupGroup Owner   X
      C#MCDEMO                                     4      1      5 C#MC      C#MC
      User      Auth      R SOA AG Uacc      Name      InstData
- C#MCCW1      USE      - --- -- NONE      /CCW + VIEW      WORKSHOP HANDS-ON USER
- C#MCCW2      USE      - --- -- NONE      /CCW + VIEW      WORKSHOP HANDS-ON USER
- C#MCCW3      USE      - --- -- NONE      /CCW + VIEW      WORKSHOP HANDS-ON USER
- C#MCCW4      USE      - --- -- NONE      /CCW + VIEW      WORKSHOP HANDS-ON USER
- C#MCCW5      USE      - --- -- NONE      /CCW + VIEW      WORKSHOP HANDS-ON USER
      SubGroup
- C#MCDEM2

```

Figure 46. Group tree report detail panel

Running SETROPTS reports and viewing class settings

This task allows you to use the ISPF **RA.S** function to run SETROPTS reports and view class settings.

About this task

You can administer the current system-wide RACF options or the Class Descriptor Table (CDT) in zSecure Admin with the **RA.S** and **AU.S** functions. Details on the **AU.S** version of the SETROPTS and RACFCLAS reports are included in [Chapter 8, “Auditing system integrity and security,”](#) on page 69. See [Figure 72](#) on page 70 and [Figure 74](#) on page 72 for more information.

Note: The RA.S option is available only in zSecure Admin.

Procedure

To run SETROPTS reports and view class settings, complete the following steps:

1. Select option **RA** (RACF Administration).
2. Select option **S** (Settings) to open the SETROPTS settings and class information panel in [Figure 47](#) on page 40. The SETROPTS and RACFCLAS reports are automatically generated.

```

                                zSecure Suite Display Selection
Command ==> -----
      Name      Summary Records Title
- SETROPTS      2          2 RACF SETROPTS system settings
- RACFCLAS      512        512 RACF class settings
- RRSFNODE      1          5 RACF remote sharing facility nodes
***** Bottom of Data *****

```

Figure 47. SETROPTS settings and class information

3. In the **SETROPTS** selection field, type the **S** command to open the SETROPTS report that is shown in [Figure 48](#) on page 41

```

RACF SETROPTS system settings
Command ===> ----- Scroll===> Line 1 of 67
                                     CSR_
                                     current settings

Complex System Collect timestamp
DINO      DINO      23 Mar 2005 00:07

General RACF properties
Access Control active      Yes
Force storage below 16M    No
Check all connects GRPLIST Yes
Check genericowner for create Yes
Enhanced genericowner check Yes
NOADDCREATOR is active     Yes
Dynamic CDT active         No
Application ID mapping stage 3
Level of KERB processing   HRF7791
RACF software release level HRF77B0
RACF DB template level     HRF77B0

Data set protection options
Prevent duplicate datasets No
Protectall                  Yes/fail
Automatic Dataset Protect  No
Enhanced Generic Naming    Yes
Prefix one-level dsns      ONEQUAL
Prevent uncataloged dsns  No
GDG modellling             No
USER modelling              No
GROUP modelling             No

RACF remote sharing options
RACF local node            NMPIPL87
RRSF propagate RACF commands No
RRSF propagate applications No

Default languages
Primary Language           ENU
Secondary Language         ENU

```

Figure 48. RACF settings SETROPTS report

You can use this report to investigate the RACF system-wide settings. You can use PF7 and PF8 for scrolling the report up and down.

Additionally, you can administer most of the **SETROPTS** options from this panel by typing over the current value with the value for the **SETROPTS** setting you want to change. This action automatically generates the appropriate **SETROPTS** command to apply the change.

4. Press PF3 to return to the SETROPTS and Class Settings Panel.
5. To view the class settings report, complete the following steps:
 - a) Enter the **S** command in the **RACFCLAS report selection** field to open the RACF class settings panel that is shown in [Figure 49 on page 41](#).

```

RACF class settings
Command ==> ----- Line 1 of 197
                                     Scroll===> CSR_
                                     15 Apr 2005 11:19

Class Active Description
- ACCTNUM Active TSO account numbers
- ACICSPCT Active CICS program control table
- AIMS Active IMS application group names (AGN)
- ALCSAUTH Supports the Airline Control System/MVS (ALCS/MVS) product
- APPCLU Active Verify ID of partner logical units during VTAM session estab
- APPCPORT Active Controls which user IDs can access the system from a given L
- APPCSERV Active Controls whether a program being run by user can act as a se
- APPCSI Controls access to APPC side information files
- APPCTP Controls the use of APPC transaction programs
- APPL Active Controls access to applications
- BCICSPCT Active Resource group class for ACICSPCT class
- CACHECLS Profiles for saving and restoring cache contents
- CBIND Controls the client's ability to bind to the server
- CCICSCMD Active Used to verify that user is permitted to use CICS syst prog
- CIMS IMS command resource group
- CONSOLE Active Controls access to MCS consoles
- CPSMOBJ Used by CICSplex SysMgr for operational controls

```

Figure 49. RACF settings RACFCLAS report

- b) To view the full detail settings of the involved resource class, enter the **S** line command in the **Class** selection field.
- c) You can enter the **R** line command to refresh the involved resource class or type over the existing value in the **Active** column. You can type: Y, A, or Active to activate a resource class that is inactive. Type N or blanks to deactivate a resource class that is active.

Chapter 4. Distributed and scoped administration functions

This section describes the distributed administration functions, which are only a selected subset of the administrative functions available. This section also provides information about the group auditor view.

Group Administration with RACF scope

Note: This function is available only in IBM Security zSecure Admin.

To limit function to a group administrator's natural RACF scope, the program must be run in restricted mode. You can achieve this requirement by using any of the following methods:

Method 1

Create an XFACILIT profile CKR.READALL with **UACC (NONE)** and give only central administrators READ permits.

This method is the easiest and most suited for an evaluation.

Method 2

Access the RACF database either through Program Access to Data Sets (PADS), or through the zSecure server (possibly in self-connect mode).

These methods are safest, but require quite some setup. For a description of setup of both methods, see the *IBM Security zSecure Admin and Audit for RACF: Installation and Deployment Guide*

Method 3

Use a **SIMULATE RESTRICT** command in SETUP PREAMBLE.

This method works only to test your own scope.

Method 4

Issue the command **SETUP VIEW** and select **1** or **2** under **Select view:**

1. View only profiles you are authorized to change (administrator view).
2. View only profiles you are authorized to change or list.

This method provides an additional scope restriction. However, this scope restriction is not called restricted mode, but administrator view.

Like method 3, this method works only to test your own scope. It prevents you from displaying profiles that you have only READ access to. It also ignores system-wide privileges, so it is even more restrictive than the natural RACF scope.

The Quick Administration panel

Note: This function is available only in zSecure Admin.

You can access the Quick Admin function by using one of the following two methods:

- [“Accessing the Quick Administration panel in a stand-alone way” on page 43](#)
- [“Accessing the Quick Administration panel with RA.Q” on page 44](#)

Accessing the Quick Administration panel in a stand-alone way

Procedure

1. Select option **X** (Exit) from the Main menu.

2. Type `CKR, STARTTRX(MENU(RA.Q))` in the command line under ISPF Option **6** to start the Quick Admin application. See [Figure 50 on page 44](#)

Accessing the Quick Administration panel with RA.Q

Procedure

1. On the Main menu, select **RA.Q** to open the Quick Admin panel that is shown in [Figure 50 on page 44](#).
2. Use the Quick Admin panel to access the most frequently used functions that are required by a central or decentralized user administrators, hiding the details.

The Quick Admin panel relies on the system or group-SPECIAL attribute of the administrator. The options in the panel can be hidden by `CKR.OPTION.RA.Q...` profiles, but otherwise the menu works as shown.

```
Menu  Options  Info  Commands  Setup  StartPanel
-----
zSecure Admin - RACF - Quick admin
Command ===> -----
1  Password      Set new password for user
2  Resume        Make sure user can work
3  Display       List user definition
4  Modify        Change user definition
5  Connect       Add group to a user
6  Add user      Create new userid from scratch
7  Add user copy Create new userid like existing model
8  Phrase        Set new password phrase for user

Userid . . . . . ----- (type userid and press enter)
New password . . . . . (type new password, option 1 only)
Verify password . . . . . (type new password again, option 1 only)
Group . . . . . ----- (type connect group, option 5 only)
```

Figure 50. Quick Admin

Group administration through CKGRACF

Note: This function is available only in zSecure Admin.

zSecure Admin provides the **CKGRACF** program as the base for distributed RACF control; that is, **Helpdesk** and **Group Admin**. The **CKGRACF** program is designed to provide the following functions:

- Access to commonly used **Helpdesk** functions such as password reset through menus.
- Access to commonly used **Group Admin** functions such as permits and connects through menus.
- Access to these functions *without* granting group-SPECIAL authority.
- Granular controls over user authorization to use **CKGRACF** functions.

CKGRACF differs from the main **CKRCARLA** program in that it does most of its tasks through APF-authorized interfaces, whereas the main program generates normal RACF commands whenever possible. Because APF-authorization is required, the user of the main **CKRCARLA** program must have sufficient administrative RACF authority to run the generated RACF commands. These commands are generated when you type over a parameter, or use line commands to change profiles. The main zSecure Admin ISPF panels sometimes call the **CKGRACF** program to make RACF changes when no standard RACF command can be generated to make the required change. Updating user data fields is the best example of this scenario.

The **CKGRACF** user does not require any special RACF authority such as the SPECIAL or group-SPECIAL attribute. The **CKGRACF** program adopts whatever authority it needs for a task by using APF interfaces. Therefore, you must control who can use the **CKGRACF** program by putting each **CKGRACF** user or group of users in the access control lists of several XFACILIT class profiles. By creating these profiles and PERMITting selected users, you can control who can use specific functions through **CKGRACF**.

This section addresses two categories of **CKGRACF** users:

- Help desk users who issue commands such as password reset and resume.
- Decentralized administrators who issue permits or connects.

The **Helpdesk** functions are done from a separate panel, while the group administrator's functions are available through the typical zSecure Admin panels. You can tailor the menus by adding RACF profiles in the XFACILIT class. Each profile represents a function. Access is granted by using the usual access rules. By default all options are shown, but after you implement a tailored menu, only the granted functions are shown to the zSecure Admin user.

For your evaluation, give yourself full authority for all **CKGRACF** functions and then explore the functions. Setting up the XFACILIT class controls for a realistic group of distributed **administrators** is a one-time job, but it can be tedious. It involves the following process:

1. Defining exactly which RACF groups are associated with which administrators.
2. Defining which **CKGRACF** functions are to be given to which administrators.
3. Creating the necessary **RDEFINE** and **PERMIT** commands to create this environment.

Because of the amount of time that is required to define the class controls, complete your initial product evaluation without attempting to establish granular controls.

To give yourself full **CKGRACF** authority, you or someone with RACF SPECIAL authority must issue the following RACF command:

```
permit ckg.** class(xfacilit) acc(update) id(yourid)
```

Single panel Helpdesk function

Note: This function is available only in zSecure Admin.

You can access the **Helpdesk** function by using one of the following two methods:

- [“Accessing the Helpdesk function in a stand-alone way” on page 45](#)
- [“Accessing the Helpdesk function with RA.H” on page 45](#)

Accessing the Helpdesk function in a stand-alone way

Procedure

1. Select option **X** (Exit) from the Main menu.
2. Type **CKR,STARTTRX(MENU(RA.H))** in the command line under ISPF Option **6** to start the **Helpdesk** functions. See [Figure 51 on page 46](#).

Accessing the Helpdesk function with RA.H

Procedure

1. Select **RA.H** from the Main menu to open the Helpdesk panel that is shown in [Figure 51 on page 46](#).

```

Menu   Options   Info   Commands   Setup   StartPanel
-----
zSecure Admin - RACF - Helpdesk
Option ==> -----
1 List List RACF profile information
2 Password/Phrase Set a new password or phrase
3 Default Set the password or phrase to the user's default value
4 Previous Set the password or phrase to the previous value
5 Resume Resume a userid after too many invalid attempts
6 Disable Temporarily disable logon for a userid
7 Enable Allow user to logon after a Disable
8 Set default Define a default password or phrase for a userid

Userid . . . . . (type userid and press enter)
Password or phrase . . . . . 1. Password 2. Phrase
New password . . . . . Verify password .
Reason . . . . .
Workflow option . . 1 1. Request 2. Withdraw 3. Approve 4. Deny

```

Figure 51. Single panel Helpdesk

Use this panel to do the most frequently used functions that are required by a central or decentralized helpdesk employee.

2. To see how the Helpdesk function works, complete the following steps:

- Type a user ID in the **Userid** field.
- Press Enter to open the Helpdesk panel that displays the selected information about the user ID as shown in [Figure 51](#) on [page 46](#).
- To see the user details, select **1** in the Helpdesk panel.

After you have checked the status of the user ID, you can make changes, such as setting a new password or password phrase (option **2**).

In the initial configuration, you see the **CKGRACF** command before it is run. To suppress this confirmation prompt for individual administrators, type `setup confirm` in the command line. Or, to suppress the prompt for all administrators, type `setup default` and select option **4**. On the next panel, change the Confirmation setting.

Helpdesk password or phrase administration functions

Note: This function is available only in zSecure Admin.

Perhaps the most important **CKGRACF** functions for the Helpdesk are enabling, setting, revoking, and resuming passwords or phrases. The following table lists the available functions and describes how they work.

Table 5. Helpdesk password-related functions	
Helpdesk function	Description
Set a new password or phrase (option 2)	Set a new password or phrase and enter it twice. When you select Phrase , a follow-on panel is displayed. zSecure Admin and zSecure Audit for RACF do not use RACF to update the user profile. CKGRACF authority is used instead. The user is also resumed.
Enable a default password or phrase (option 3)	The password or phrase is set to the default password or phrase for the user. A central administrator must have previously set the personal default password or phrase for the user. The Helpdesk administrator does not see the password. The user is also resumed.

Table 5. Helpdesk password-related functions (continued)	
Helpdesk function	Description
Enable the previous password or phrase (option 4)	The previous password or phrase is enabled again. In this case, the administrator does not see the password or phrase. The previous password or phrase is automatically marked as expired; the user can use it only one more time for the next logon. The user is also resumed.
Set default (option 8)	Define a default password or phrase for a user ID.

The concept of a default password or phrase (Option 3) is new to RACF. The intention is that a simple (and low-quality) password or phrase is defined for each user. Each user selects a word or number that can be remembered indefinitely. Only the central RACF administrator sees this word when it is established by using **CKGRACF**. Other administrators do not see it when it is called. If a normal password for the user becomes unavailable for some reason, any Helpdesk administrator can enable the default password or phrase for the user. The user is expected to create a new normal password as soon as possible. This approach is better than using system-wide reset passwords, such as **SYS1**, **SECRET**, **PSWPSW**.

Tailoring the Helpdesk

Use these guidelines to tailor the Helpdesk panel for the installation.

You can tailor the Helpdesk panel for the installation in either of the following ways:

- Through XFACILIT profiles that start with **CKR.OPTION.RA.H**, you can selectively enable and disable options in the Helpdesk.
- Using **SETUP NLS**, you can modify the text and options in the panel.

Some functions are user management functions and should be available to a limited number of people. Examples of these functions are setting the default password or a new password, or setting authority levels. You can define **CKR.OPTION** profiles in the **XFACILIT** class to restrict the use of management functions. Thus, the installation can specify which options are shown in the Helpdesk panel for each user and selectively delegate responsibilities in the organization.

If the access control list of the corresponding profile grants a user access, the user is allowed to do the function. Otherwise, the line command is not shown in the action list and its use is prohibited. [Figure 52 on page 47](#) shows an example of a tailored Helpdesk panel that does not contain the options 2, 6 and 8. It does not contain these options because the user lacks the required access in the applicable **CKR.OPTION.RA.H** profiles.

```

Menu      Options  Info      Commands  Setup      Startpanel
-----
zSecure Admin - RACF - Helpdesk
Option  ==> -----
1      List          List RACF profile information
3      Default       Set the password or phrase to the user's default value
4      Previous      Set the password or phrase to the previous value
5      Resume        Resume a userid after too many invalid attempts
7      Enable        Allow user to logon after a Disable

userid . . . . . (type userid and press enter)
Password or phrase . . . . _ 1. Password  2. Phrase

Reason . . . . .
Workflow option . . 1 . . 1. Request  2. Withdraw  3. Approve  4. Deny

```

Figure 52. Tailored Helpdesk panel

Chapter 5. Setup functions for managing data

The **Setup** functions control which data is used by zSecure Admin and zSecure Audit for RACF.

You can switch data sources while you use them. Other **Setup** functions set global switches and parameters. You can see some of these functions with the **Resolve** and **Explode** options.

Adding data

About this task

So far, you used only your live RACF data to display various profiles. You can create and use the following data sources:

- An unloaded RACF database.
- A CKFREEZE data set that contains extracted information from all your DASD and from various internal z/OS tables.

To begin this process, complete the following steps:

Procedure

1. Return to the Main menu. Use PF3 as necessary.
2. Select option **SE (Setup)** to open the Setup panel that is shown in [Figure 53 on page 49](#).
3. If you are on a 24-line display, press PF8 and PF7 to scroll up and down in the panel.

Tip: Before you continue, you can select Options **0** through **5** (one at a time) in the Setup panel to obtain a general overview of the various setup options.

```
Menu  Options  Info  Commands  Setup
-----
zSecure Admin+Audit for RACF - Setup
Command ==> -----
0  Run          Specify run options
1  Input files  Select and maintain sets of input data sets
2  New files    Allocate new data sets for UNLOAD and CKFREEZE
3  Preamble    Carla commands run before every query
4  Confirm     Specify command generation options
5  View        Specify view options
6  Instdata    Customize installation data appearance
7  Output      Specify output options
8  Command files Select and maintain command library
9  Certificates Specify templates for new digital certificates
A  Alert       Configure zSecure Alert
B  Collections Select and maintain collections of input sets
U  User defined User defined input sources
N  NLS         National language support
T  Trace       Set trace flags and CARLA listing for diagnostic purposes
W  Windows     zSecure Visual RACF configuration
D  Default     Set system defaults
R  Reset       Reset to system defaults
I  Installation Specify installation defined names
```

Figure 53. Setup

Adding new files

Procedure

1. From the initial Setup panel, which is shown in [Figure 53 on page 49](#) , select Option **2 (New files)** to open the New files panel that is shown in [Figure 54 on page 50](#).

```

Menu   Options   Info   Commands   Setup
-----
zSecure Admin+Audit for RACF - Setup - New files
Command ==> _____
Create new unload file from the RACF database, and/or CKFREEZE file

Data set with unload from RACF database, use UNLOAD as last qualifier
Unload . . . . . _____

I/O configuration file, use CKFREEZE as last qualifier
Ckfreeze . . . . . _____

Description for this set of input files
Description . . . _____

Enter data set names and description and press ENTER

```

Figure 54. New files panel

2. Type a data set name in the **Unload** line.

When you enter the data set names, use quotation marks if you do not want the data set names to have your user ID as the high-level qualifier. It does not matter whether these data sets exist yet. However, if they do exist, they must be cataloged.

3. Type a data set name in the CKFREEZE line. Use quotation marks if necessary.
4. Type a short, unique description of the files in the **Description** line. For example, UNLOAD and CKFREEZE data sets created on 8 Apr 2005.

Tip: It is a good practice to use the input file **Description** field to indicate what type of data sets are part of this set. In the future, this practice can prevent opening the set in browse or edit mode to examine which data sets are included.

5. Press Enter.

If one or both of the data set names that you specified do not exist, the allocation entry panel that is shown in [Figure 55 on page 50](#) opens to allocate and catalog the new data sets.

```

Menu   Options   Info   Commands
-----
zSecure Suite - Setup - New files
Command ==> _____
CKFREEZE file not found. Change dataset name, or specify allocation parameters

Dataset name . . . MYNAME.CKFREEZE_____

Allocation parameters to create new dataset:
Volume serial . . _____ (Blank for authorized default volume)
Generic unit . . _____ (Generic group name)
Space units . . _____ (KB, TRKS, or CYLS)
Primary quantity _____ (In above units, press HELP for suggestion)
Secondary quantity _____ (In above units)

Record format . . VBS_____ (VB or VBS)
Block size . . . 27998____
Logical Record Len X_____ (X or maximum record length)

Press ENTER to allocate dataset, press END to stop processing

```

Figure 55. Typical allocation panel

6. Type the appropriate allocation parameters, but do not change the DCB attributes, and press Enter.

If both named data sets are new, you see the allocation panel a second time. Running these panels allocates and catalogs your new data sets by using dynamic allocation. The first time that you create an unloaded RACF copy and a CKFREEZE data set, you must specify ample disk space. For RACF unloads, allow as much space as used by your live RACF database. For CKFREEZE files, allow at least 2 MB for each online DASD volume, plus space for catalog and HSM information, as well as 2 MB per

GB HFS/ZFS space, and 1 MB per 5000 IMS or CICS transactions or programs. For more details on space requirements for CKFREEZE data sets, see *IBM Security zSecure Admin and Audit for RACF: User Reference Manual*

Do not alter the DCB parameters. Until you are familiar with the disk space required, specify a large secondary allocation quantity (such as 100 MB).

Tip: After you create your first unloaded RACF copy and CKFREEZE data sets, use ISPF to examine them to determine how much disk space was used. You can use this information to estimate future usage.

After you allocate the files, the panel that is shown in [Figure 56 on page 51](#) opens.

```

Menu      Options      Info      Commands
-----
zSecure Admin and Audit - Setup - Input files
Command ==> _____ Scroll ==> CSR_

Description . . . . UNLOAD and CKFREEZE data sets created on 8 Apr 2005.
Complex . . . . . Version . . . . .
Enter data set names and types.          Type END or press F3 when complete.
Enter dsname with .* to get a list       Type SAVE to save set, CANCEL to quit.
Valid line commands: E I R D             Type REFRESH to submit unload job.

      Data set name or DSNPREF=, or Unix file name          Type or ?   NJE node
- 'MYNAME.UNLOAD'          UNLOAD          -----
- 'MYNAME.CKFREEZE'       CKFREEZE          -----
***** Bottom of data *****

```

Figure 56. Initial view of an input file set under z/OS

Refreshing and loading files

About this task

The data sets listed constitute one input set. An input set can contain multiple CKFREEZE data sets, multiple SMF files, and multiple HTTP log files. However, an input set can contain only one RACF unload, or one or more RACF data sets from one split database.

To refresh and load files, complete the following steps:

Procedure

1. In the Input file panel ([Figure 56 on page 51](#)), type REFRESH in the command line. Press Enter to open the Job submission panel.
2. In the Job submission panel, type a valid job card in the **Job statement information** section.
3. Use the **Edit JCL Option (2)** to open the normal ISPF editor to customize the JOB statement and make any other necessary changes to the job.
For example, you might need a JOBLIB or STEPLIB statement to access zSecure Admin and zSecure Audit for RACF. If you copied zSecure Collect for z/OS (CKFCOLL) to an authorized library in the LNKLIST, you do not need a JOBLIB or STEPLIB statement for it. Assign a job class with a large or unlimited region size.
4. Submit the job.

What to do next

Wait until the job runs. If there is a long queue of jobs that are waiting to run, you can exit from zSecure Admin and Audit while the job completes. The job itself takes only a few minutes to run, unless you have a large configuration. You can add a NOTIFY= *yourid* in the job card. If the job fails, the problem is usually that there is not enough storage. A region size of 64 MB is typically sufficient to run zSecure Collect for z/OS.

After the job is completed, continue with the next procedure.

Selecting the input set

Procedure

1. To open the Input file panel, type **SE.1** (Option **1** on the Setup panel) in the **Command** line.

The Input file panel looks like the input set you created, with the description you entered for the input files. An example is shown in [Figure 57 on page 52](#).

```
Menu  Options  Info  Commands  Setup
-----
Command ==> zSecure Admin+Audit for RACF - Setup - I Row 1 from 4
              Scroll ==> CSR_
(Un)select (U/S/C/M) set of input files or work with a set (B, E, R, I, D or F)

  Description                                Complex
- UNLOAD and CKFREEZE data sets created 8 Apr 2005          selected
- Active backup RACF data base                             DEMO
- Active primary RACF data base                             DEMO
- Active backup RACF data base and live SMF data sets        DEMO
***** Bottom of data *****
```

Figure 57. Input file selection

In [Figure 57 on page 52](#), the input file sets marked as selected indicate that zSecure Admin and zSecure Audit for RACF are now using these input sets for the input data. The other input sets are always present and include:

- Active backup RACF data base
- Active primary RACF data base
- Active backup RACF data base and live SMF data sets

You can switch to any input set that is defined in this display. For example, you can switch between the unloaded files you created and the live RACF databases by going to this panel and selecting the appropriate input set.

2. Use one of the available line commands:

S – Select an input set for processing

When you select an input set, the data sets it contains are selected for processing. After the data sets are located, the set is marked as selected. This option is also selected by specifying A (Add or Addition of a set). The selected set is an addition to sets already selected. You can change input selections many times during a session, although this change is not typical usage.

C – Select a set as Compare base.

Set a predefined set of input files as the Compare base set. Only one set can be selected as the Compare base set.

M – Select a set as Merge source

Set a predefined set of input files as the Merge source set.

U – Remove an input set from selection

Remove the selection from **Active backup RACF(r) data base and live SMF data sets** that is selected. The set is not selected any more and is not used in future queries.

Specifying collections of input sets

This task allows you to specify collections of input data sets for your programs.

About this task

With SETUP Collections, you can specify which collection of input sets the program uses. When collections are used, sets of input files that were previously selected through SETUP FILES are no

longer used. Subsequent selection of a set of input files through SETUP FILES results in unselecting the collection.

Procedure

1. On the main menu, type SE (Setup) in the Option line and press **Enter**.

The Setup menu is displayed:

Menu	Options	Info	Commands	Setup
Startpanel				

zSecure Suite - Setup				
Option ==> -----				
				More: +
0	Run	Specify run options		
1	Input files	Select and maintain sets of input data sets		
2	New files	Allocate new data sets for UNLOAD and CKFREEZE		
3	Preamble	CARLa commands run before every query		
4	Confirm	Specify command generation options		
5	View	Specify view options		
6	Instdata	Customize installation data appearance		
7	Output	Specify output options		
8	Command files	Select and maintain command library		
9	Certificates	Specify templates for new digital certificates		
B	Collections	Select and maintain collections of input sets		
U	User defined	User defined input sources		
N	NLS	National language support		
T	Trace	Set trace flags and CARLa listing for diagnostic purposes		
D	Default	Set system defaults		
R	Reset	Reset to system defaults		
I	Installation	Specify installation defined names		

Figure 58. Setup menu

2. On the Setup menu, type B in the Option line and press **Enter**.

If no collections are defined, the Setup collections definition panel is displayed.

Menu	Options	Info	Commands	Setup
Startpanel				

zSecure Suite - Setup - Collections				
Command ==> -----				
Enter description for new collection of input sets				

Figure 59. Setup collections definition panel

If one or more collections have been defined, the following panel is displayed:

Menu	Options	Info	Commands	Setup
Startpanel				

zSecure Suite - Setup - Collections				Row 1 from 2
Command ==> -----				Scroll ==> CSR
(Un)select (U/S) collection or work with a collection (E, R, I, or D)				
Description				
-	Collection for systems of SYSPLEX TEST			selected
-	Collection for systems of SYSPLEX PROD			
***** Bottom of data *****				

Figure 60. Setup collections display

Use the collection display to select collections of sets of input files for processing and to add or delete collections. You can use the following line commands:

S

Select a collection. The input sets that are contained in the collection are selected for processing. After the data sets are found in the system, the collection is marked as selected. Sets that are selected through SETUP FILES are cleared. Only one collection can be selected at the same time.

U

Clear a collection. The collection is not selected any more. It is not used in future queries.

E

Edit the collection content. On the resulting display, you can select or clear input sets for the collection.

R

Repeat a collection. The contents of the collection you choose are copied into a new collection.

I

Insert a new collection.

D

Delete a collection. The collection is removed from the administration of the dialog. The input sets in the collection are not deleted from the system.

3. To edit a collection, type the E action command in front of the collection and press **Enter**.

The following panel is displayed:

```
Menu      Options      Info      Commands      Setup
-----
Command ==> zSecure Suite - Setup - Collections Row 1 from 6
Description . . Collection for systems of SYSPLEX TEST Scroll ==> CSR
(Un)select (U/S/C/M) input sets to be added to or removed from collection

Description
- CKFREEZE for system TST1 selected
- CKFREEZE for system TST2 selected
- CKFREEZE for system TST3 selected
- CKFREEZE for system PRD1
- CKFREEZE for system PRD2
- CKFREEZE for system PRD3
***** Bottom of data *****
```

Figure 61. Setup collections sets display

Use the sets display to add sets of input files to a collection for processing. Sets can be added, edited, and deleted with SETUP FILES. You can use the following line commands:

B

Browse the contents of a set of input files. By browsing the set, you can check the definitions for the set. When you exit the detail panels, the set is not selected.

C

Set a set of input files as Compare base.

M

Set a set of input files as Merge source.

S

Select a set of input files to be added to the collection. By selecting the set, the data sets it contains are selected for processing. After the data sets are found in the system, the set is marked as selected. This option is also selected by specifying A. A selected set is added to other sets that are already selected.

U

Clear a set of input files to remove then from the collection. The set is not selected any more and is not used in future queries

What to do next

zSecure Admin offers facilities to maintain the RACF database. The examples show how easy it is to use the zSecure ISPF interface and to control the RACF or **CKGRACF** commands that the product generates in response to the commands issued from the interface.

Other Setup parameters

The Setup panel sets a number of allocation and formatting characteristics for zSecure Admin and zSecure Audit.

Inspect these settings and make any necessary changes. The default settings are appropriate for most users. The most used Setup options are Confirm and View.

INSTDATA parameter

Use the **INSTDATA** parameter to define the layout of the installation data field so that it can be displayed in business-oriented terms in the standard panels.

View and Confirm options

Information about the View options is available in “Access list display settings” on page 22. The following sections describe the remaining settings of the View options and the Confirm options.

The **ACL/Connect sort** selection defines the access control list and connects sort order. It does the following types of sorts:

- By ID (user or group in the access control list) if you select option **1**.
- By user ID (after exploding) if you select option **2**.
- By descending access level (Alter-None) or connect authority (Join-Use) if you select option **3**.

These sort options make scanning the ACL and connect easy and help you to find what you are looking for quickly.

You can use the **Show OS specific options** selection to switch between z/OS and z/VM specific options or tag both to see all options.

When you select the **Add summary to RA displays for multiple complexes** option, an extra summary section is added to the display panels for options **RA.U**, **RA.G**, **RA.D**, and **RA.R**. The summary information shows profile differences when multiple complexes are selected. This setting is not saved in your ISPF profile. This option is enabled by default.

Use the **Add connect date and owner to RA.U connect group section** option to add the connect date and connect owner to the **RA.U** connect group section.

The **Add user/group info to view** parameter specifies whether to display information about users and groups (including connect groups) on ACLs. This setting provides complete information. However, it causes zSecure Admin and zSecure Audit for RACF to use much more virtual storage, which requires a larger TSO region.

In the selection field for a parameter, type a **/** to set a switch-on, or blank to set off the switch.

SMTP options for email output

Use these guidelines to specify **SMTP** options to send an email with reports.

The Output panel (Option **7** on the Setup panel) contains the **SMTP options**. You must specify **SMTP** options to send an email with reports through the **Send as e-mail** panel options or the **M (E-mail report)** action command in the Results panel. Ask your system programmer for the correct settings.

Menu	Options	Info	Commands	Setup
zSecure Suite - Setup - Output				
Command ==> -----				
Specify space allocation parameters for:				
_ CKRCMD		_ REPORT		_ SYSPRINT
Print options		SMTP options		
Destination . . .	-----	SMTP node	-----	
Sysout class . .	-	SMTP sysout . . .	-	
Writer id	-----	SMTP writer . . .	-----	
Copies	----	SMTP atsign . . .	-	
Character set . .	----			
FCB	----			
Forms	----			
Output descriptor	-----			
Forms overlay . .	----			

Figure 62. Setup output definition panel

In the Setup Output panel that is shown in [Figure 62 on page 56](#), the **SMTP node** field specifies the job entry subsystem (JES) destination to which emails are routed for final processing. If the SMTP server is running on your local system, this field can be left blank or you can specify `local`.

The **SMTP sysout** field specifies the JES output class to be used for the SMTP output processing of emails.

The **SMTP writer** field specifies a name for use in SMTP selecting an email SYSOUT data set. The external writer name is equal to the SMTP or CSSMTP address space name. Usually this name is SMTP or CSSMTP.

The **SMTP atsign** field specifies the character that SMTP uses instead of @ from the default codepage 1047 (hex value X'7C') to indicate the start of the domain of an email address. The parameter must match the ATSIGN option of the SMTP or CSSMTP server.

Defining these **SMTP** options is required when you use email as the output source.

Command execution control

The Confirm panel (Option **4** of the Setup panel) is important.

Note: For more information about the Confirm panel, see [“Generating and confirming RACF commands” on page 33](#).

The first two parameters apply to zSecure Admin and refer to line commands (such as **D** (for delete) or **C** (for copy or clone) and field **Overtime** when you display various profiles. These line commands generate RACF commands. You can control the steps and execution of commands by selecting the values that you want in the Confirm panel. Type a / before a profile, and then press Enter to see the available commands.

[Table 6 on page 56](#) shows the **Action on command** option settings and descriptions.

Table 6. Action on command option settings and descriptions	
Action on command	Description
1. Queue	RACF change commands (automatically generated when you use a line command) are written to the CKRCMD file.
2. Execute	The automatically generated RACF commands are immediately run, after confirmation, in RACF.
3. Not allowed	No update line commands (like C and D) are permitted in the profile detail panel. Any line commands that are issued are denied.

Table 6. Action on command option settings and descriptions (continued)

Action on command	Description
Execute display commands (for option 1 only)	<p>This option is valid only if you specify option 1 (Queue) for the Action on command field.</p> <p>If you specify this option, list commands like LISTUSER, PING, TRACERTE, and RLIST are run even though Action on command is set to Queue. This option applies only to the commands generated by the program as list commands. If you change or add commands yourself, it does not apply. For example, FORALL treats all sorts of commands as ordinary commands even if you typed in LISTUSER.</p>

The **confirmation** setting indicates the disposition of the RACF commands that are generated by zSecure Admin. Table 7 on page 57 shows the **confirmation** option settings and descriptions.

Table 7. Confirmation settings and descriptions

Confirmation	Description
1. None	No RACF change commands must be confirmed. None disables the verification prompt; use it only when you understand how to use zSecure Admin.
2. Deletes	Only Delete commands must be confirmed.
3. Passwords	Commands containing a <i>readable</i> RACF password are not confirmed. All other commands must be confirmed.
4. All	The user must confirm all change commands.
5. Add	All commands must be confirmed, even the "Add new profile" commands that RA.U, RA.G, RA.D, and RA.R generate.

Tip: Regardless of the preceding settings, you cannot use the facilities that described here to alter the RACF database without having the required authority. An example of such authority is group-SPECIAL, to change the RACF profiles.

The **Command routing** option determines how generated commands are processed. Table 8 on page 57 describes the available command routing options.

Table 8. Command routing settings and descriptions

Command routing	Description
1. Ask	Ask is the maximum prompting level. For all commands or command files, the user is prompted for command routing information. This setting applies to commands generated for the local system and commands that are generated from data sources that are known to be from other systems.

Table 8. Command routing settings and descriptions (continued)

Command routing	Description
2. Normal	<p>Normal is the default prompting level for command routing. Both internally generated commands and bulk commands that are always queued are run without prompting for command routing options. Confirmation prompting and command queuing are done based on the settings for the user. If the RACF data source applies to the local system, commands are routed to the local system. The user can specify any of the following remote options for a local data source RRSFNODE, ZSECNODE, JESNODE. These remote indicators are ignored for a local data source. If the commands are not for the local system, they are routed to one of the following systems in order of preference:</p> <ol style="list-style-type: none"> 1. The ZSECNODE or the ZSECSYS as specified on the RACF data source that is used for this profile. 2. The RRSFNODE node that is associated with the RACF data source used for this profile. The command uses the AT keyword and specifies either the associated user ID if the terminal user has an association with a user ID on the target RRSFNODE, or the current user ID. 3. The NJE node that is specified for the RACF data source <p>If a specific routing mechanism is selected and fails, there is no automatic fallback to another routing mechanism.</p>
3. Local only	<p>Independent of the input source, this option routes the command to the local system. If the local system is part of an RRSF autocommand environment, RRSF processing might route this command to other RRSF nodes.</p>

You can modify many fields while you display profiles if you are running zSecure Admin with the **Overtyp** **fields in panels** option in the Command generation section of the panel. Based on the modifications, zSecure Admin and zSecure Audit for RACF automatically generate the RACF commands necessary to make the changes you want. These change commands are also subject to the action on command and confirmation settings that described previously. The ability to modify fields is one of the most important usability features. It provides an easy way to make minor changes in existing RACF profiles.

All zSecure Admin and zSecure Audit for RACF setup parameters are saved in your personal ISPF profile data set. Therefore, each user can have different setup parameters. If you access zSecure Admin and zSecure Audit for RACF by using multiple user IDs, you might have different setup parameters for each user ID.

Changing and verifying values

About this task

This example uses the **RA.U** function that you are already familiar with to illustrate the ability to change values by using the **Overtyp** function and verify options.

To demonstrate these options, complete the following steps:

Procedure

1. Go to the Main menu. (Press PF3 as necessary.)
2. From the Main menu, select option **RA** (RACF Administration).
3. Select option **U** (User).

4. Type a value for **Userid** or type a value for **Default group** (SYS1, for example) to obtain a display with multiple profiles.

You can type over a value in any underlined field. For example, to change the password interval for one of the profiles, type a new value in the **PwInt** column.

Tip: If no fields are underlined, type **SET** in the command line and press Enter. Verify that the **Overtyp e fields in panels** option is selected (/ in front of the option).

If this method does not work, complete the following steps:

- a. Type **SETUP** in the **Command** field to go to the Setup panel.
- b. In the Setup panel, select **Options** from the bar. Press Enter, and then select **1. Settings**.
- c. Select **Colors** from the bar, and then select **2. CUA attributes**.
- d. For all entry field rows, change the Highlight column to the value USCORE.
- e. Reissue the query.

If you still do not see underlines, you probably have a terminal type (or you are emulating a terminal type) without extended Data Stream support.

5. Press Enter.

zSecure Admin generates the appropriate RACF command to change the password interval of the involved user and prompts you to verify the command before execution.

Remember to scroll left and right by using the standard ISPF function keys and to issue an **S** (Select) line command for more details.

6. Press PF3 to reject (not run) the RACF command or press Enter to submit the RACF command.

If you elected to submit the command, zSecure Admin for RACF submits the command as though you entered the command in the TSO command line. You must have appropriate authority (for example, SPECIAL or ownership) before RACF accepts the command. If you do not have appropriate authority, you receive a RACF violation error message.

You can type over the value in the installation data field in a profile, changing only the characters you want to change. Alternatively, you can issue the **MI** (manage user ID information) line command to edit the whole field. You can also work with user-defined fields in the installation data.

Line commands for common tasks

When you display a profile, you can issue line commands by typing a letter in the first character position of the displayed profile line and pressing Enter.

The most common functions are as follows:

- C**
for copy
- D**
for delete
- L**
for list
- S**
for select

When you issue a line command, zSecure Admin and zSecure Audit for RACF generate the appropriate RACF commands to do the requested function. A common technique is to use the **Copy** line command to reproduce a profile. Then, type over the values in the fields that you want to be different in the new profile later.

The **L** line command runs a RACF list command in the primary RACF database for the profile you issue the **L** for. You can also use this command in a detail display.

Note: The **L** line command always reports from the primary RACF database.

To view a list of the line commands available in a profile overview display, type the **/** line command. For the **RA.U** function, you must scroll down (PF8) to see all of the application line commands.

Chapter 6. Creating and viewing a report

About this task

This task introduces the basic steps for generating a report and viewing the results. In this example, you generate a report to examine the scope of a specified user ID.

Procedure

1. From the IBM Security zSecure Admin and Audit for RACF Main menu, complete the following steps:
 - a) Select option **RA** (RACF Administration).
 - b) Select option **3** (Reports).
On the next panel, you can select one of the predefined reports.
 - c) Select option **4** (Permit/Scope).

2. On the Report panel, create a report that shows you the scope of the specified user:
 - a) Type a user ID. For this exercise, it does not matter whose user ID you enter.
 - b) Specify **3** (type of authorization is Scope – Access or administrative authority by any means).
 - c) Type **/** in front of **Output in print format** in the **Specify output options** section of the screen and press Enter.
 - d) Press Enter in the next panel.

On this panel, you can exclude some of the ways that the entered Group or User can have access to certain resources. During this evaluation, however, do not exclude any of the options. Explore all the methods by which a Group or User can have access to a resource.

Results

zSecure Admin and Audit for RACF searches the RACF data. The report results are displayed on an overview panel that lists the classes and scope of access for the specified user ID. The [Figure 63 on page 61](#) shows detailed information about the selected class.

```
BROWSE - IBMUSER.C2R10FE.REPORT ----- LINE 0000 0.8 s CPU, RC=0
COMMAND ==> ----- SCROLL ==> PAGE
***** Top of Data *****
U S E R   A U T H O R I Z A T I O N   F O R   I D   IBMUSER   IBM DEFAULT USER

Class      Type      Profile name                                Volume Access Via
ACCTNUM    GENERIC  **                                           ALTER   IBM
APPCTP     GENERIC  **                                           READ    - U
CONSOLE    SDSF                                           ALTER   - W
DATASET    GLOBAL  &RACUID*.**                                ALTER   - U
DATASET    GENERIC  ANF.*.**                                     READ    - U
DATASET    GENERIC  ANF.SANFLOAD                               READ    - U
DATASET    GENERIC  AOP.*.**                                    READ    - U
DATASET    GENERIC  API.*.**                                    READ    - U
DATASET    GENERIC  ASM.*.**                                    READ    - U
DATASET    GENERIC  ASM.SASMMOD1                               READ    - U
DATASET    GENERIC  ASM.SASMMOD2                               READ    - U
DATASET    GENERIC  ASM.SASMSAM1                               READ    - U
DATASET    GENERIC  ASMA.*.**                                    READ    - U
DATASET    GENERIC  ASMA.V1R2M0.SASMMOD1                       READ    - U
DATASET    GENERIC  ASMA.V1R3M0.SASMMOD1                       READ    - U
DATASET    GENERIC  ASMA.V1R3M0.SASMSAM1                       READ    - U
DATASET    GENERIC  ASMT.*.**                                    READ    - U
DATASET    GENERIC  ASMT.V1R2M0.SASMMOD2                       READ    - U
```

Figure 63. SCOPE report

After you examine the report, press PF3 to produce the Results panel. All reports generate the Results panel, see [Figure 64 on page 62](#).

Tip: If you want to produce a scope report that shows only the access a user has through their user ID and group connects, select option **2** - Direct permit or Connect (Id or Connect Group on access list).

Results panel

The Results panel is presented after many queries or functions. Familiarize yourself with its operation. You can use the panel to review results in several different ways and save useful material from the functions. Useful material can include RACF commands that are generated by zSecure Admin and zSecure Audit for RACF while it processes the last functions.

Reports overwrite the same files every time. That is, the files like SYSPRINT, REPORT, and CKRCMD are rewritten every time that the primary modules are called. Save any important results with **W** line command on the Results panel before you start another query or function.

```
Menu  Options  Info  Commands  Setup
-----
                zSecure Admin+Audit for RACF - Results
Command ==> -----

The following selections are supported:
B Browse file                S Default action (for each file)
E Edit file                  R Run commands
P Print file                 J Submit Job to execute commands
V View file                  M E-mail report
W Write file into seq. or partitioned data set

Enter a selection in front of a highlighted line below:
- SYSPRINT  messages
- REPORT    printable reports
- CKRTSPRT  output from the last TSO command(s)
- CKRCMD    queued TSO commands
- CKR2PASS  queued commands for IBM Security zSecure Admin
- COMMANDS  zSecure Admin input commands from last query
- SPFLIST   printable output from PRT primary command
- OPTIONS   set print options
```

Figure 64. Results panel

The names of some of the files on the display are highlighted to indicate that the last operation generated data in these files. When applicable, you can browse, edit, save, run, or submit any of these files with one of commands that are at the top of the Results panel.

Tip: You can use the **RESULTS** primary command in the command line of most panels to obtain the current Results panel.

To print DISPLAY results, use the **PRT** command.

Archiving report output

About this task

If you specify a data set name that does not exist, zSecure Admin and Audit prompts you for allocation parameters.

Procedure

1. In the Results panel, enter a **W** in front of the **REPORT** keyword. A panel opens where you can specify the data set name of an archive data set.

```

Menu  Options  Info  Commands  Setup
-----
      zSecure Admin+Audit for RACF - Results of last query
Command ==> -----

Write the zSecure Admin+Audit for RACF report file to the following dataset:
Data set name . . . . . -----
Member . . . . . -----
Disposition . . . . . ----- (Append, Overwrite, or Generate)

Processing option after Write completed:
Go into Edit . . . . . N__ (Yes/No)

```

Figure 65. Archive output to a data set

2. Specify the parameters that are required to create a sequential or a partitioned data set:
 - a) For a sequential data set, you can write over the content by selecting **disposition Overwrite**, or append to the end of the current content by selecting **disposition Append**.
 - b) For a partitioned data set, you can specify a member name and the dispositions **Overwrite** or **Append**, or choose disposition of **Generate** and leave the member name blank. **Generate** assigns a unique member name to each report, so you are not required to choose a member name.
3. Press Enter to create the data set.
4. Press PF3 to exit from the Results panel.

The Results panel exists after any search. However, it is automatically displayed only if files other than SYSPRINT contain output.

Tip: The next function that you run overwrites these result data sets. If you want to save any of the data sets, do it before you run the next search.

Mailing report output

About this task

The Mail option is valid only if you specified SMTP configuration options in Setup Output definition panel (**SE.7**). See “SMTP options for email output” on page 55. Do not attempt to send an email if the SMTP routing parameters are not defined.

Procedure

1. In the Results panel, enter an **M** in front of the **REPORT** keyword.
The [Figure 66 on page 64](#) opens.

```
Menu  Options  Info  Commands  Setup
-----
                                zSecure Admin+Audit for RACF - E-mail
Command ==> -----

Specify e-mail data
From . . . . &jobname at &system <mbox@domain>-----
Mail to . . . -----
CC . . . . .-----
BCC . . . . .-----
Reply to . . .-----
Output format 1 1. Normal (MIME/HTML)
                 2. Plain text (formatting may be lost)
                 3. Attachment
Font size . . . -
Subject . . . -----

Additional data (e.g. signature)
-----
-----
-----
-----
-----
-----
-----
-----
```

Figure 66. Email specification panel

- 2. Specify the recipient of the email and any additional formatting or notation.
- 3. Press Enter to send the email.

Chapter 7. Verify functions

The Verify functions help you to analyze RACF and z/OS integrity and security data.

For example, many of the functions compare RACF data with what actually exists on your disks (as read by zSecure Collect for z/OS). In addition, most functions automatically generate RACF commands to correct problems found during analysis. These commands are not automatically run; they are only presented for your review or use.

The first time that you use Verify functions, you might receive more output than you expect, especially if you have a large installation that is relaxed in DASD and RACF cleanup policies. There is a default limit of 50 messages per disk volume, but optionally you can override this limit through a lower-level panel. Product messages are concise and exact, but might take a little study to absorb. Also, *do not assume* that your installation must correct *all* the anomalies reported by all of the various Verify functions. Your installation, for example, might not agree with the security policies implicit in some reports. Use the information as appropriate, **but do not accept it blindly**.

After a Verify function completes, the results are presented with the Results panel. Generally, if RACF commands were generated, these commands are displayed first. Sometimes, the SYSPRINT output is presented directly after the completion of the Verify function.

The SYSPRINT file contains more information about the problems that are found during analysis that is done by a Verify function, such as, concise descriptions of the anomalies and problems that are found during the analysis. When you enter the command **find 'v e r i f y'** in the command line, you go directly to the M E S S A G E S V E R I F Y section of the SYSPRINT file. A space between the characters and the delimiting single quotation marks are required.

- [“Running the Verify functions” on page 65](#)
- [“Running the Verify functions for the first time” on page 67](#)

Running the Verify functions

About this task

Read the overview of the Verify functions in [Chapter 7, “Verify functions,” on page 65](#) before you run them.

If you are running the Verify functions for the first time, follow the procedure in [“Running the Verify functions for the first time” on page 67](#) for a sample walkthrough.

Procedure

To display and select a Verify function, complete these steps:

1. Select option **AU** (Audit) from the Main menu.
2. Select option **V** (Verify) to open the Verify selection panel that is shown in [Figure 67 on page 66](#).

```

Menu Options Info Commands Setup StartPanel
-----
zSecure Admin+Audit for RACF - Audit - Verify
Command ==> -----
Enter "/" to select one or more options
- Permit Find undefined users and groups and their profiles
- User permit Find and remove redundant permits to userids
- Connect Compare USER, GROUP and CONNECT profiles
- PADS Programs on conditional access list have PROGRAM profile
- Group tree Loops in group tree
- Password Userids with trivial passwords (not from an unloaded db)
- Protect all All datasets are protected by a (discr or gen) profile
- On volume Datasets defined by discrete profiles actually exist
- Not empty Generic profile has matching disk or tape datasets
- All not empty As above, even 'outer' generic profiles
- Indicated Discrete profile exists for RACF-indicated datasets
- Program Datasets as members in PROGRAM profile exist on disk
- Pgm exists PROGRAM profiles cover actual load modules
- Started task Check that procedures can indeed be started, etc.
- TSO all RACF All TSO users should have RACF password and TSO segment
- Sensitive Sensitive datasets not protected properly

```

Figure 67. Verify selection panel

You can select one or more of the Verify functions for execution, although it would be unusual to select more than three at a time. Before you try any of the Verify functions, review the function descriptions in [Table 9 on page 66](#) and [Table 10 on page 67](#).

Table 9. Verify functions	
Function	Description
Permit	Reports on any IDs (Users or Groups) used in RACF access control lists, or ownership fields, that are not currently defined as valid IDs. If these invalid IDs are defined and made valid again with a new user, this new user instantly inherits all the authorities of the former owner of that user ID. This exposure can be severe. A more severe exposure is that anyone with group-SPECIAL or JOIN authority can create a group with the same name as the ID in the access control list and obtain the authority of the ID.
User Permit	Reports on any resource profile that contains a user ID in the access control list, while that user is also connected to one or more groups that are also in the same access control list. The access levels of both the user ID and the group or groups are compared. If the access for that specific user ID is equal to the highest access of any connected group, the user ID entry is redundant and is eligible for removal.
Connect	Verifies that connect information in user and group profiles is consistent.
PADS	Verifies that every program on a RACF conditional access control list has a corresponding Program profile. PADS administration is often complicated, and several Verify functions address it.
Group tree	Detects loops in your group definitions. These loops usually happen when either RACF administration is not centralized or administrators change frequently. RACF prevents loops from occurring by checking whether an ALU or ALG command causes a loop.
Password	Checks every user password in the RACF database with several trivial values. The Password function cannot be performed on an Unload file, because the passwords are not unloaded.

The Verify functions described in [Table 10 on page 67](#) require a CKFREEZE data set.

Table 10. Verify functions that require a CKFREEZE data set	
Function	Description
Protect all	Lists all disk data sets that are not protected by a generic or discrete RACF profile. If your installation is using a RACF PROTECT ALL environment, try this function. If you are not in a PROTECT ALL environment, be prepared for a large amount of output.
On Volume	Verifies that each discrete RACF profile has a corresponding data set on DASD. Often old discrete profiles remain in RACF long after the data set is deleted.
Not empty	Identifies obsolete generic profiles. This function verifies that generic data set profiles that protect subsets of more general generic profiles have existing data sets being protected by the generic profile. (Take care when using this function. Profiles meant to protect future or periodic allocations might be <i>empty</i> (no data sets exist under the profile) at the time the Verify check is made.)
All not empty	This function is a more general case of the Not empty check. It verifies that all generic profiles are being used to protect real data sets. It can be used to find unneeded generic profiles. RACF and z/OS have no mechanism for automatically removing generic profiles, and large numbers of obsolete profiles can accumulate over time.
Indicated	Verifies that all RACF data sets with RACF indicator bit set in the DSCB or catalog have a corresponding discrete profile.
Program	Verifies that each data set listed as a member in a Program profile does exist.
Pgm exists	Verifies that each Program profile covers at least one load module in a data set, as specified by the profile. If modules are moved from one library to another, there is no automatic update of RACF Program profiles and the modules are no longer protected. The Program and Pgm exists functions help you to maintain a clean PADS environment.
Started task	Checks the consistency of the started procedure table (ICHRIN03) with various RACF user, group, and STARTED class profile definitions and with procedure members defined for JES2 and MSTR. TSO all RACF and Sensitive are available only in zSecure Audit.
TSO all RACF	Checks the users that are defined in the SYS1.UADS data set with the user definitions in RACF and reports any UADS IDs that can log on bypassing the control of RACF.
Sensitive	Checks the protection of z/OS sensitive data sets against a baseline policy. If the protection is insufficient, it generates a RACF command to fix the situation either by adding a correct profile or by fixing or improving the offending profile.

Some of the Verify functions are more important than others. If you are not in a PROTECT ALL environment, the **Permit** and **Protect All** functions might be the most important.

Running the Verify functions for the first time

Procedure

1. Type / in the **INDICATED** line in the Verify panel and press Enter.
The CKRCMD command file that is shown in [Figure 68 on page 68](#) automatically opens.

```

File Edit Confirm Menu Utilities Compilers Test Help
-----
EDIT      IBMUSER.C2R10FE.CKRCMD                      Columns 00001 00072
Command ==>                                         Scroll ==> CSR_
Press PF3, Enter R at the cursor location, press ENTER to run these commands
000001      /* CKRCMD file CKR1CMD complex YESTERDY NJE JES2TEST generated
000002      /* Commands generated by VERIFY INDICATED */
000003      addsd 'IBMUSER.DISCRETE.DSN1' vol(TSTUS1) unit(3390) noset from(
000004      deldd 'IBMUSER.DISCRETE.DSN1' vol(TSTUS1)
000005      addsd 'IBMUSER.DISCRETE.DSN2' vol(TSTUS1) unit(3390) noset from(
000006      deldd 'IBMUSER.DISCRETE.DSN2' vol(TSTUS1)
***** ***** Bottom of Data *****

```

Figure 68. Verify the indicated CKRCMD file

In this example, the installation contains two data sets that are RACF-indicated while the corresponding discrete data set profile is missing from the RACF database. If necessary, use the ISPF functions PF7, PF8, PF10, and PF11 to scroll the panel so that you can view all the data.

As you can see, the generated commands can be run to fix the inconsistencies that are found by the Verify Indicated function.

2. Press PF3 to open the Results panel.

3. Select the SYSPRINT file if you want to view the details of the Verify function.

The additional information is provided in the section that is headed by `MESSAGES VERIFY INDICATED` shown in Figure 69 on page 68.

4. Type `find 'verify'` on the command line to jump to the messages section of the SYSPRINT file instead of scrolling down several panels. Alternatively, you can scroll to the bottom of the file and, if applicable, scroll back up one or two pages.

Figure 69 on page 68 shows an example of the `MESSAGES VERIFY INDICATE` section.

```

M E S S A G E S   V E R I F Y   I N D I C A T E D           E E N D   2 Jun 2015 06:00   page   12

CKR0040 04 RACF indicator set but no discrete profile found for DEMOU1
CRXAR.DISCR.DATASET
CKR0040 04 RACF indicator set but no discrete profile found for DEMOU1
CRXART.DISCR.DATASET

```

Figure 69. Example of the `MESSAGES VERIFY INDICATE` section in the SYSPRINT file

Note: The SYSPRINT file contains more information about VERIFY messages.

5. To return to the Verify Selection panel, press PF3 twice.
6. Type `/` in the **Permit** line.
7. Remove the `/` from the **Indicated** line. Step through the next panels until zSecure Admin and zSecure Audit for RACF runs the function.

Unless you maintain a clean database, zSecure Admin and Audit for RACF probably finds invalid user IDs in the database. If there are many of these user IDs, you can print the report and study it offline. Invalid user IDs can present complex problems that are not suitable for on-the-fly repairs.

Tip: When RACF commands are generated by one of the Verify functions, the solution suggested by zSecure Admin and Audit for RACF might not be appropriate or might require adjustment to your environment. Always look at the commands closely. If necessary, look in the SYSPRINT file for more information before you run them.

Chapter 8. Auditing system integrity and security

Use the guidelines and steps in this task to view reports on your current RACF system options.

About this task

You can use the **AU.S** function to view the current SETROPTS settings. A range of z/OS integrity and security checks is available under the **AU.S** option in the primary menu. For example, you can view the current SETROPTS settings by using this function.

Procedure

To use the **AU.S** function, complete the following steps:

1. Select option **AU** (Audit) from the Main menu.
2. Select option **S** (Status) to open the Audit Status panel.

You can use this panel to select one to five report categories. First, explore the **RACF control** (RACF oriented tables) category.

```
Menu  Options  Info  Commands  Setup
-----
zSecure Admin+Audit for RACF - Audit - Status
Command ===> -----
Enter / to select report categories
- MVS tables           MVS oriented tables (reads first part of CKFREEZE)
- MVS extended         MVS oriented tables (reads whole CKFREEZE)
7 RACF control         RACF oriented tables
- RACF user            User oriented RACF tables and reports
- RACF resource        Resource oriented RACF tables and reports

Select options for reports:
/ Select specific reports from selected categories
- Include audit concern overview in overall prio order
- Only show reports that may contain audit concerns
-- Minimum audit priority for audit concerns (1-99)
- Show differences
- Print format         - Concise (short) report
- Background run

Audit policy
/ zSecure
- C1
- C2
- B1
```

Figure 70. Audit Status

3. Select the category **RACF control** and type **/** before **Select specific reports from selected categories**. Press Enter.

Note: The Audit policy can be set. The C1, C2, and B1 policies are security standards that are described by the US Department of Defense in a document that is known as the *Orange book*. The default policy is a standard that is a practical and achievable security level that is applicable to most companies. The policy defines what is classified as an exposure.

4. Select the report **SETROPTS** to generate a report of the current RACF system options of this installation and the report **RACFCLAS** to report in the class descriptor table and number of profiles.
5. Press Enter to generate the requested reports.

The panel that is shown in [Figure 71 on page 70](#) opens so that you can select and view the reports.

```

zSecure Admin+Audit for RACF Display 1 s elapsed, 0.6 s CPU
Command ==> ----- Scroll==> CSR_

Name      Summary Records Title
- SETROPTS      1      1 RACF system, ICHSECO, and general SETROPTS settings
- SETROPAPU      1      3 SETROPTS settings - audit concerns
- RACFCLAS      1     168 RACF CDT, SETROPTS class info and number of profiles
***** BOTTOM OF DATA *****

```

Figure 71. Audit report overview

6. Select the **SETROPTS** report. Then, press Enter to open the SETROPTS setting panel that is shown in Figure 72 on page 70.

```

RACF system, ICHSECO, and general SETROPTS settings                               Line 1 of 67
Command ==> ----- Scroll==> CSR_

Complex System Collect timestamp
DINO      DINO      23 Mar 2005 00:07

General RACF properties
Access Control active           Yes
Force storage below 16M        No
Check all connects GRPLIST     Yes
Check genericowner for create  Yes
Enhanced genericowner check    Yes
NOADDCREATOR is active        Yes
Dynamic CDT active             No
Application ID mapping stage    3
Level of KERB processing       HRF7791
RACF software release level    HRF77B0
RACF DB template level        HRF77B0

Data set protection options
Prevent duplicate datasets     No
Protectall                     Yes/fail
Automatic Dataset Protect     No
Enhanced Generic Naming       Yes
Prefix one-level dsns         ONEQUAL
Prevent uncataloged dsns     No
GDG modellling                No
USER modelling                 No
GROUP modelling                 No

RACF remote sharing options
RACF local node                NMPIPL87
RRSF propagate RACF commands   No
RRSF propagate applications     No
RRSF propagate passwords       No
RRSF honour RACLINK PWSYN      No

Default languages
Primary Language               ENU
Secondary Language             ENU

DASD data set protection
Volume level permits DASDVOL   No
Erase-on-scratch              All

Terminal protection
Terminal protection active      Yes
Undefined terminal TERMUACC     NONE

TAPE data set protection
Tape dataset check TAPEDSN     No
Tape volume protection active   Yes
Protection duration RETPD       00000

Program protection
Program control WHEN(PROGRAM)  Yes
Program control mode           Basic

Auditing options
Audit SPECIAL users            Yes
Audit OPERATIONS users        Yes
Audit USER profile changes     Yes
Audit GROUP profile changes    Yes
Audit SECLABELed resources     No
Audit command violations       Yes
Audit from security level      None
Real datasetnames in SMF       No
Dataset logoptions             Profile
APPLAUDIT is active           No

Mandatory Access Control options
Require SECLABEL               MLACTIVE No
Prevent declassify             MLS      No
Stabilize labels               MLSTABLE No
Label maintenance              MLQUIET  No
No SECLABEL tolerate COMPAT    No
Special required SECL.CONTROL  No
Req. labels UNIX fs            MLFSOBJ  No
Req. labels IPC obj            MLIPCOBJ No
Name hiding active             MLNAMES  No
Labels by system SECLBYSYSTEM  No

Identification/Authentication options
Remember dates INITSTATS       Yes
Prevent logon if unused days    255
Revoke after password attempt   5
Old passwords forbidden         32
Password change wait days       No
Password change interval        90
Password change warning day     10
Mixed case passwords allowed    No
Special passwd chars allowed    No
RACF password algorithm         LEGACY
Key change required day         30
MFA support available           Yes

Job Entry Subsystem options
Batch userid req BATCHALLRACF  Yes
Monitor userid req XBMALLRACF  No
Call router exit EARLYVERIFY   No
Default uid remote NJEUSERID   ????????
Default uid local UNDEFINEDU    ++++++
JOBCLASS/SUBMITTER access ctl  No
JOBCLASS/OWNER access ctl      Yes

RVARY passwords
RVARY SWITCH password set      No
RVARY STATUS password set      No

```

Figure 72. Audit status SETROPTS report

The current SETROPTS (=SET RACF options) are listed in this report. You can use PF8 to scroll down to see the other SETROPTS parameters that are currently active, such as system-wide audit settings and password rules.

7. Press PF3 to return to the report overview.

8. Select **SETROPAU** to open the report that is shown in [Figure 73 on page 71](#).

This report lists the audit concerns related to the current SETROPTS settings. Audit concerns give an indication of possible security exposures in the current installation.

SETROPTS settings - audit concerns				Line 1 of 3	
Command ===> _____				Scroll===> CSR_	
				8 Apr 2005 08:46	
Pri	Complex	System	Count		
11	DEMO	DEMO	3		
Pri	Parameter		Value	Audit concern	
--	11 RVARYSTATUSPWSET		No	Password to deactivate RACF still at I	
--	10 RVARYSWITCHPWSET		No	Password to switch RACF database still	

Figure 73. SETROPTS audit concerns overview

zSecure Audit for RACF ranks the severity of problems found. These problems are in the **Pri** field, and are numbers 0 - 255. Be aware, however, that understanding the reason for those rankings requires some knowledge of z/OS internals and some judgment of the context of the total system. [Table 11 on page 71](#) provides a rough categorization of the audit concern priorities.

Table 11. Audit concern priority categories		
Priority	Type	Explanation and action required
40-255	Exposure	A serious potential security exposure and concern for an auditor. Requires an immediate action.
20-39	Concern	A serious security threat. Requires an action, but it is less urgent.
11-19	Housekeeping	Minor problem or authority that must be audited, reviewed, and approved or denied. RACF housekeeping can remove many these concerns.
1-10	Watch	Read it, and resolve it as time permits.
0	OK	No audit concern.

By default, the Audit concerns are sorted by descending priority. The details of the audit concerns can be displayed by entering an S or / in front of the concern you want to view. To view the Audit concerns, complete the following steps:

- Press PF3 again to return to the report overview.
- Select report **RACFCLAS** and press Enter to open the Audit Status RACFCLAS report that is shown in [Figure 74 on page 72](#).

This report displays the contents of the RACF Class Descriptor Table. You find a record for all classes that are defined to RACF.

```

Line 1 of 168
RACF CDT, SETROPTS class info and number of profiles
Command ==> ----- 8 Apr 2005 08:45 Scroll==> CSR_
Complex System   Classes Active Nonempty Profiles Audit concerns Priority
DEMO      DEMO      168    59      58    2383      43      22
Pr Class   Pos Grouping Members Protect Glbl Generic Profiles RC Oper RF
--  --  --  --  --  --  --  --  --  --  --  --  --  --  --  --  --  --  --  --  --
22 DEVICES 115          Inactive          3 4 OPER Ye
20 TEMPDSN 106          Inactive          16 4      Ye
7  DASDVOL 0 GDASDVOL Inactive          1 8      Ye
7  VMPOSIX 63          Inactive          11 4      Ye
6  SERVER  546          Inactive          1 4 OPER Ye
6  TERMINAL 2 GTERMINL Inactive          9 4 OPER Ye
6  VMCMD   14          Inactive          1 4      Ye
6  VMMDISK 18          Inactive          2 8      Ye
5  AIMS     4          Inactive          9 4      Ye
5  APPCTP   89          Inactive          2 8      Ye
5  GIMS     4          Inactive          1 4      Ye
5  JESINPUT 108         TIMS Inactive          16 8      Ye
5  PERFGRP  125         TIMS Inactive          2 4      Ye
5  ROLE     551         TIMS Inactive          6 8      Ye
5  SECDATA  9          SCDMBR Inactive          8 4      Ye
5  SECLABEL 117         SCDMBR Inactive          35 4      Ye
5  SYSMVIEW 542         SCDMBR Inactive
5  TIMS     4 GIMS Inactive

```

Figure 74. Audit status RACFCLAS report

In this report, the classes are sorted by descending audit concern priority. However, you can sort this overview by any column that you want. The result of entering the **sort pos** command is that this overview is reordered according to **posit** number, while the result of the **sort class** command is that the classes are sorted alphabetically by class name.

Tip: The help panels provide background information and explanations.

Chapter 9. Rule-based compliance evaluation

Use these guidelines to understand how the zSecure Audit Compliance Testing Framework can be customized to meet the security needs to your organization.

AU.R is the user interface of the zSecure Audit Compliance Testing Framework. The framework was introduced to help automate the compliance checking of newer external standards as well as site standards, and to save time for other security tasks. Standards can be customized.

To use rule-based compliance evaluation, you must ensure that the CKACUST data set was created with the proper white list members that define which users or groups are compliant for the job role that the white list member describes. A sample white list member is shown here:

```
EDIT          CRMASCH.MY.CKACUST(SYSPAUDT) - 01.00          Columns 00001 00072
Command ==>                                         Scroll ==> CSR
***** Top of Data *****
000001 * Systems Programmers or Systems Administrators *
000002 SYS1
000003 SYSPROG
***** Bottom of Data *****
```

Figure 75. Sample white list member for the Systems Programmers or Systems Administrators job role

The CKACUST data set can also contain various customization members. For example, the CLASSIFY member contains a list of SIMULATE SENSITIVE statements that are used to define the data sets that are sensitive to the PCI-DSS standard.

By default, the CKACUST data set is used that is specified in the zSecure configuration that is used to start the product. You can also specify an extra CKACUST data set in CO.1, which overrides the default CKACUST data set. Note that data set concatenation is used, so only members with actual overrides need to be created. If no CKACUST data set is present in the zSecure configuration, you can use SCKRSAMP member CKAZCUST to create an "empty" set of members. To prevent error messages, a complete set of members is required. See the *Installation and Deployment Guide* for information on creating the CKACUST data set.

CARLa DEFTYPES are used to look up IDs that are stored in the CKACUST members that specify the compliant user IDs or groups for that white list member.

Standards are, in effect, sets of predefined compliance rules. The standards as defined to zSecure Audit for automated checking are usually part of a wider standard. The wider standard also includes organizational rules for which compliance checking cannot be automated.

Standards are defined with the CARLa statement STANDARD. If you want to add site rules, you need advanced knowledge of the CARLa command language. The built-in standard checks are provided in separate members in the SCKRCARL library for each individual rule set (=external standard rule definition). These members have these naming conventions:

- CKAG* members are RACF STIG rules.
- CKAItt* members with tests that can be included in RACF rules, where tt is the two-character abbreviation for a newlist type.
- C2AG* members are ACF2 STIG rules.
- KCTG* members are Top Secret STIG rules.
- C2RG* members are ESM independent STIG rules.
- C2RItt* members with tests that can be included in ESM independent rules, where tt is the two-character abbreviation for a newlist type.
- CKAO* members are GSD331 rules.
- CKAP* members are RACF PCI-DSS rules.
- C2AP* members are ACF2 PCI-DSS rules.

- C2RZ* members are ESM independent ZSECURE_EXTRA rules.
- CKAZ* members are RACF ZSECURE_EXTRA rules.
- C2AZ* members are ACF2 ZSECURE_EXTRA rules.
- CKTZ* members are Top Secret ZSECURE_EXTRA rules.

AU.R - Compliance menu options

Use the guidelines and steps in this task to generate a rule-based-compliance auditing report

About this task

You can use the **AU.R** options to report on multiple standards at the same time. If you are analyzing large systems, the amount of concurrent analysis might be limited by the amount of memory available to your TSO userid (REGION session parameter).

Procedure

1. On the Main menu, type AU.R (Audit - Rule-based compliance evaluation) in the **Option** line and press **Enter**.

The Audit Compliance menu is displayed:

Menu	Options	Info	Commands	Setup	Startpanel

zSecure Suite - Audit - Compliance					

Option					
===>	-----				
C	Configure	Configuration and site assertions			
E	Evaluate	Run standard evaluation			
H	History log	Assertion, override, and configuration logs			
S	Subsets	Rule subsets			
T	Test rule	Single rule evaluation and configuration			

Figure 76. Audit Compliance menu

2. Then type the one-character option on the **Option** line to select one of the following menu items:

Configure

Type C to configure your CKACUST members, define your sensitive resources, and to assert compliance rules that do not require system data. See [“AU.R.C - Configure” on page 74](#).

Evaluate

Type E to run one or more standard evaluations and to assert or override compliance results. See [“AU.R.E - Evaluate” on page 82](#).

Or select one of the more advanced items:

History log

Type H to search in the assertion, override, or sensitive resource log files.

Subsets

Type S to configure and evaluate specific rules, STIG categories, or sets of rules.

Test rule

Type T to configure, evaluate, browse, view, or edit a specific rule member.

AU.R.C - Configure

You can use option AU.R.C to define the installation-specific configuration items and to perform assertions that do not rely on system data. For example, STIG rule AAMV0014, which requires the existence of a formal migration plan for removing or upgrading OS software.

On the main AU.R menu, type C on the option line and press **Enter**. The [Figure 77 on page 75](#) menu is displayed:

```

Menu      Options      Info      Commands      Setup
-----
zSecure Suite - Audit - Configure

Command ==>

Specify evaluation standards to configure:
- STIG                      - PCI-DSS
- GSD                      - zSecure extra

Specify members for other evaluation standards to configure:
- ----- - ----- - -----

Specify configuration options:
- Standard definition and configuration
-   Assertable tests only
- Configuration of resource names for domain sensitivities
- Configuration of user and group IDs in domain allowlist members
- Configuration of information in domain lookup members
- Configuration of information in long domain lookup members
- Configuration of auxiliary CARLA statements in domain configuration

```

Figure 77. Audit Compliance Configuration menu

Perform the following steps:

1. Select the evaluation standard or standards that you want to configure. You can use the **Specify members for other evaluation standards to configure** input fields to select and add members that contain other evaluation standards. The selections and member fields are shared with AU.R.E and are retained across sessions.
2. Select what you want to configure:

Standard definition and configuration	Shows all the tests for the selected standards. By selecting Assertable tests only , you can limit the tests to only those tests, which cannot automatically determine the outcome from the collected data. This option generates the STANDARD report. You can use the display format to zoom in across the following levels: <ul style="list-style-type: none"> • Standard: number of rule sets, tests, and assertable tests per standard • Rule set level: number of tests and assertable tests per rule set • Rule level: number of tests and assertable tests per rule • Test level: tests and if the test is assertable • Detail level: test criteria and the member(s) that contains the test The Test and Detail levels also allow asserting the test.
Configuration of resource names for domain sensitivities	Shows all configurable sensitivities. This option generates the CONFIGS reports.
Configuration of user and group IDs in domain allowlist members	Shows all configurable sensitivities. This option generates the CONFIGA report.
Configuration of information in domain lookup members	Shows all configurable CKACUST configuration members. This option generates the CONFIGL report.

Configuration of information in domain long lookup members	Shows all configurable CKACUSV long configuration members. This option generates the CONFIGLL report.
Configuration of auxiliary CARLa statements in domain configuration	Shows all other CKACUST configuration members that are not allowlist members. This option generates the CONFIGX report.

If you do not select a specific configuration type, all configuration types are used.

To perform assertions, or configure sensitive resources, you must allocate an ASSERTION data set with the SAVE option in SE.1. To work with CKACUST members, you must setup a CKACUST data set in CO.1 or SE.8. To work with CKACUSV members, you must setup a CKACUSV data set in SE.8.

For example, when you select STIG in **Specify evaluation standards** but none of the other configuration options, the following reports are generated:

```

zSecure Suite Display Selection
Command ===> _____ Line 1 of 6
                                Scroll===> CSR
Name      Summary Records Title
- STANDARD      3      7134 Standard definition and configuration
- CONFIGS       78     1880 Configuration of resource names for domain sensitivity
- CONFIGA       75     2609 Configuration of user and group IDs in domain allowlist
- CONFIGL       34      347 Configuration of information in domain lookup member
- CONFIGLL       1        2 Configuration of information in domain long lookup member
- CONFIGX       2     2446 Configuration of auxiliary CARLa statements in domain configuration
***** Bottom of Data *****

```

Figure 78. Configure Display Selection panel

You can select to view the following reports:

- The [STANDARD](#) report shows all compliance rule sets, rules, and tests. At the test level, you can maintain assertions for the entire domain.
- The [CONFIGS](#) report shows all configurable sensitivities. You can use this report to configure your data sets or resources that need to be tagged with a sensitivity but that cannot be automatically tagged by zSecure.
- The [CONFIGA](#) report shows all CKACUST allowlist members that must be populated with the appropriate user or group IDs.
- The [CONFIGL](#) report shows all CKACUST configuration members for various compliance rules.
- The [CONFIGLL](#) report shows all CKACUSV long configuration members for various compliance rules.
- The [CONFIGX](#) report shows all CKACUST members that contain site specific CARLa code and are included by compliance rules.

STANDARD: Standard definition and configuration

This standard report provides information about what checks will be performed during the compliance evaluation. Further selecting the **Assertable tests only** option in Figure 77 on page 75 displays a list of all compliance tests that require manual assertion. Assertions that are done in this report assert the test for all systems. This standard-level assertion is primarily intended for procedural asserts where no system specific data is needed.

When you select STANDARD on the [Figure 78 on page 76](#), the following panel is displayed:

Standard definition and configuration

Command ==> _____ Scroll==> CSR
 9 Aug 2018 07:08

Standard	Sets	Tests	Assrt	Version
-- RACF_STIG	388	3784	199	6.47

Figure 79. Configure Standard selection panel

This panel shows the selected standard evaluations, the number of compliance rule sets, tests, tests that can be asserted, and the version of the standard evaluation. When you select the standard, the following panel is displayed:

Standard definition and configuration

Line 1 of 384

Command ==> _____ Scroll==> CSR
 9 Aug 2018 06:49

Standard	Sets	Tests	Assrt	Version
RACF_STIG	388	3784	199	6.47

Rule set	Rules	Tests	Assrt	MembSet	Caption
-- AAMV0010	1	1	1	C2RGM010	Change Management Process
-- AAMV0012	2	2	2	C2RGM012	Supported system software
-- AAMV0014	1	1	1	C2RGM014	Upgrade OS plan
-- AAMV0018	1	1	1	C2RGM018	Software Patches
-- AAMV0030	1	1		C2RGM030	LNKAUTH=APFTAB
-- AAMV0040	1	1		C2RGM040	APF libraries exist
-- AAMV0050	1	1		C2RGM050	APF libraries unique
-- AAMV0060	1	2	2	C2RGM060	Review AC=1 modules
-- AAMV0160	1	1		C2RGM160	PPT programs exist
-- AAMV0325	1	1	1	C2RGM325	Accessible LPA
-- AAMV0350	1	1	1	C2RGM350	Accessible LINKLIST
-- AAMV0370	3	6	2	C2RGM370	SMF data collection
-- AAMV0380	3	5		C2RGM380	SMF record (sub)types
-- AAMV0400	1	1	1	C2RGM400	Collect and retain SMF

Figure 80. Configure Rule Set Selection panel

This panel shows the individual rule sets that are part of the selected standard and show the number of rules, tests, and tests that can be asserted per rule set. In addition this panel shows the CARLa member that contains the rule set and the rule set caption. When you select a rule set, the following panel is displayed:

Standard definition and configuration

Command ==> _____ Scroll==> CSR
 9 Aug 2018 07:08

Standard	Sets	Tests	Assrt	Version
RACF_STIG	388	3784	199	6.47

Rule set	Rules	Tests	Assrt	MembSet	Caption
AAMV0010	1	1	1	C2RGM010	Change Management Process

Rule	Tests	Assrt	MembDom	Caption
-- AAMV0010	1	1	C2RGC340	(CMP) Change Management P

***** Bottom of Data *****

Figure 81. Configure Rule selection panel

This panel shows the individual rules that are part of the selected rule set, the number of tests, and the tests that can be asserted. In addition, for each rule, this panel also shows the CARLa member that contains the rule and the rule caption. When you select a rule, the following panel is displayed:

```

Line 1 of 1
Standard definition and configuration
Command ==>-----Scroll==> CSR
9 Aug 2018 07:08

Standard      Sets  Tests  Assrt  Version
RACF_STIG     388  3784   199   6.47
Rule set      Rules Tests  Assrt  MembSet  Caption
AAMV0010      1      1      1  C2RGM010  Change Management Process
Rule          Tests  Assrt  MembDom  Caption
AAMV0010      1      1  C2RGC340  (CMP) Change Management P
Test name      Assrt  MembTest  Test description
_CMP_Assert    Assrt  C2RGM010  Assert Change Management Proces
***** Bottom of Data *****

```

Figure 82. Configure Test Selection panel

This panel displays the individual tests that are part of the selected rule. It also shows if the test is can be asserted, the CARLa member that contains this rule, and the rule caption.

If you select the test, the Figure 83 on page 78 is displayed.

If the test can be asserted, you can assert the test for the entire domain by entering an A (Assert) in front of the test and pressing **Enter**. You are then presented with the Figure 85 on page 79.

```

Line 1 of 47
Standard definition and configurationCMP_Assert
Command ==>-----Scroll==> CSR
AAMV0010      Change Management Process 6 Aug 2019 07:08

Rule set description
A Change Management Process (CMP) must be utilized on the system.
Rule description
The entries contained in the SMP/E CSI data sets must reflect the operating
system software environment.
Test description
Assert that the entries contained in the SMP/E CSI data sets reflect the
operating system software environment.

Test definition
Test name                      CMP_Assert
Test lookup base field name
Test field name
Relational operator
Compliance comparison value    assertion
Test type n/a,(non-)compliant assert

Full domain assertion
_ Full domain asserted as

```

Figure 83. AU.R.C - Configure Test Details panel

This panel shows all test details. If the test can be asserted, you can enter an A (Assert) in front of the **Full domain asserted as** field and press **Enter**. You are then presented the Figure 85 on page 79.

If you scroll to the bottom of the details page, you can see that the **Rule sert CARLa member, Domain defined CARLa member** and **Test defined in CARLa member** fields can be further selected.

Line 37 of 45

Standard definition and configurationCMP_Assert
 Command ==>-----Scroll==> CSR
 AAMV0010 Change Management Process 9 Aug 2018 07:08

Standard name	RACF_STIG
Version of standard	6.47

Test origin

- _ Rule set CARLa member C2RGM010
- _ Domain defined CARLa member C2RGC340
- _ Test defined in CARLa member C2RGM010

***** Bottom of Data *****

Figure 84. Configure Test Details panel (bottom)

Enter B to browse or V to view the CARLa member.

The following panel is presented for an entire domain assertion:

```

*----- Perform assertion entire domain -----*
|
| New assertion state
|   1. Compliant
|   2. Non-compliant
|   3. Retract prior assertion
| On whose authority . .
| Reason . . . . .
| Valid until . . . . . (YYYY-MM-DD, optional)
|
*-----*

```

Figure 85. Configure entire domain assertion panel

This panel allows you to assert a test for the entire domain, for example, for all complexes and all systems.

Option **1. Compliant** asserts the test as compliant, option **2. Non-compliant** asserts the test as non-compliant, and option **3. Retract prior assertion** retracts any prior assertions and resets the test results to unknown.

The **On whose authority** and **Reason** fields are free format input fields.

The optional **Valid until** field, requires a date in the given input format, and, when an assertion expiration date is provided, renders this record invalid after the provided date.

CONFIGS: Configuration of resource names for domain sensitivities

The CONFIGS report helps to define resources for the various configurable sensitivities that are used by the compliance rules and that zSecure cannot automatically determine.

When you select CONFIGS on the [Figure 78 on page 76](#), the following panel is displayed:

Line 1 of 77

Configuration of resource names for domain sensitivities

Command ===> _____ Scroll===> CSR

9 Aug 2018 08:14

Sensitivity Standards	
- BLSROPTR_	1
- BMCIOAinst_	1
- BMCIOAuser_	1
- BMCIOASTC_	1
- BMCMVinst_	1
- BMCMVSTC_	1
- CatSolinst_	1
- CtlDinst_	1
- CtlDuser_	1
- CtlDSTC_	1
- CtlMinst_	1
- CtlMjcl_	1
- CtlMuser_	1
- CtlMRsys_	1
- CtlMRinst_	1
- CtlMSTC_	1

Figure 86. Configure Sensitivity selection panel

This panel allows you to perform the following actions on each of the reported configurable sensitivities:

- B: Browse configuration assertion
- E: Edit configuration assertion
- S: Show additional information
- V: View configuration assertion

The B , E, and V options show the currently defined (or an empty list) resources for this configurable sensitivity. The S option lists the standards and the rule sets that use this configurable sensitivity.

CONFIGA: Configuration of user and group IDs in domain allowlist members

The CONFIGA report helps to define mostly user and group IDs for the various compliance rules that are allowlisted for specific tests. These allowlists group, for example, roles such as the system programmers, storage administrators, and started tasks, and are used by the tests to exclude user and group IDs that are expected to need access to the tested resources.

When you select report CONFIGA on the [Figure 78 on page 76](#), the following panel is displayed:

Line 1 of 80

Configuration of user and group IDs in domain allowlist members

Command ===> _____ Scroll===> CSR

27 Oct 2020 08:34

DomAllow	Standards	Description
-- AATASK	1	Abend-Aid STC/batch job (AAVIEWER/ABENDAID/BDCAS/TDCAS) I
-- APFLIB	1	APF-authorized libraries with approved AC=1 modules
-- APPBAUDT	1	Application production batch user IDs
-- APPDAUDT	1	Application Development Programmers
-- APPSAUDT	2	Application Production Support Team members
-- AUDTAUDT	2	Auditors, whether they are System, Security, or other
-- AUTOAUDT	1	Automated Operation STCs/Batch Jobs
-- BMCADMIN	1	INCONTROL Admins/Owners of CONTROL-D/M/O
-- BMCTASK	1	INCONTROL STC/batch job IDs of IOA, CONTROL-D/M/O
-- BMCUSER	1	INCONTROL Users of IOA, CONTROL-D/M/O
-- BPXSUSTC	1	STCs that require certain BPX and SUPERUSER access
-- CA1TASK	1	CA 1 Tape Management STC/batch job IDs
-- CHGOWNER	1	Users authorized to issue the chown command in UNIX
-- CICBAUDT	1	CICS Batch Programs
-- CICDAUDT	1	CICS Developers
-- CICSAUDT	1	CICS Started Task
-- CICSDEF	1	CICS regions default user IDs (DFLTUSER)
-- CICSEVNT	1	Users of EP Adapter transactions

Figure 87. Configure Allowlist Selection panel

This panel allows you to perform the following actions on each of the allowlist members:

- B: Browse allowlist member
- E: Edit allowlist member
- S: Show additional information
- V: View allowlist member

The B , E, and V options show the allowlist member from the site or when defined, from the user CKACUST library. The S option lists the standards and rule sets that use this allowlist member.

CONFIGL: Configuration of information in domain lookup member

The CONFIGL report helps you to define configuration members for the various compliance rules. These list, for example, if an expected name is used for a task, or if an ID is connected to a certain group. This report differs from CONFIGA in that it is not about testing a particular access level of members.

When you select CONFIGL on [Figure 78 on page 76](#), the following panel is displayed:

Configuration of information in domain lookup members			Line 1 of 34
Command ==> -----			Scroll==> CSR
			27 Oct 2020 08:34
DomLkup	Standards	Description	
--- AAPROC	1	Non-default names of Compuware Abend-Aid STC procedures	
--- CAIPROC	1	Non-default names of CA Common Services STC procedures	
--- CA1PROC	1	Non-default names of CA 1 Tape Management STC procedures	
--- CA1UEXIT	1	Program names of approved CA 1 Tape Management user exits	
--- CFSTRUCT	1	Coupling Facility Structures that must be encrypted	
--- CICPAUDT	1	CICS production regions	
--- CICSDEF	1	CICS regions default user IDs (DFLTUSER)	
--- CONGROUP	1	Group IDs of default RACF groups for console user IDs	
--- CTDPROC	1	Non-default names of BMC INCONTROL Control-D STC procedur	
--- CTMPROC	1	Non-default names of BMC INCONTROL Control-M STC procedur	
--- CTOPROC	1	Non-default names of BMC INCONTROL Control-O STC procedur	
--- EMERAUDT	1	Emergency TSO logon IDs	
--- FSSETUID	1	Data sets that are allowed to be mounted with SETUID	
--- FTPUEXIT	1	Load module names of approved FTP Server user exits	
--- FTPUSERS	2	FTP only user IDs	
--- HZSPROC	1	Non-default names of Health Checker STC procedures	
--- ICSFPROC	1	Non-default names of ICSF STC procedures	
--- INETDSRV	1	Restricted network services approved to be provided by th	

Figure 88. Configure configuration members selection panel

This panel allows you to perform the following actions on each of the configuration members:

- B: Browse configuration member
- E: Edit configuration member
- S: Show additional information
- V: View configuration member

The B , E, and V options show the configuration member from the site or when defined, from the user CKACUST and CKARCALA library. The S option lists the standards and rule sets that use this configuration member.

CONFIGLL: Configuration of information in domain lookup member

The CONFIGLL report helps you to define long configuration members for the various compliance rules. These list, for example, a list of digital certificate issuers. This report differs from CONFIGL in that these members are stored in a library that can contain records with more than 80 characters.

When you select CONFIGLL on [Figure 78 on page 76](#), the following panel is displayed:

```

Configuration of information in domain long lookup members
Command ===> _____ Scroll===> CSR
27 Oct 2020 08:40
DomLkupL Standards Description
-- CNFTRUST      1 Active certificate name filtering rules approved by an IS
-- GAT           1 RACF global access checking table entries approved by an

```

Figure 89. Configure long configuration members selection panel

This panel allows you to perform the following actions on each of the configuration members:

- B: Browse configuration member
- E: Edit configuration member
- S: Show additional information
- V: View configuration member

The B , E, and V options show the configuration member from the site or when defined, from the user CKACUSV library. The S option lists the standards and rule sets that use this long configuration member.

CONFIGX: Configuration of auxiliary CARLa statements in domain configuration

The CONFIGX report helps to configure extra CARLa members for various compliance rules, that is, for tests that require additional CARLa definitions. These members are included in the compliance members and can contain DEFSENS and SIMULATE statements needed to configure the compliance tests.

When you select CONFIGX on the [Figure 78 on page 76](#), the following panel is displayed:

```

Configuration of auxiliary CARLa statements in domain configuration
Command ===> _____ Scroll===> CSR
27 Oct 2020 08:40
DomainCf Standards Description
-- ACPCNFG      1 SIMULATE statements for ACPxxxxx controls
-- CLASSIFY     2 Member for PCI-DSS SIMULATE SENSITIVE statements
-- C2RG@IDF     1 Population members for STIG

```

Figure 90. Configure auxiliary CARLa statements in domain configuration

This panel allows you to perform the following actions on each of the extra CARLa members:

- B: Browse CARLa domain config member
- E: Edit CARLa domain config member
- S: Show additional information
- V: View CARLa domain config member

The B , E, and V options show CARLa domain config member from the site or when defined, from the user CKACUST library. The S option lists the standards and the rule sets that use this CARLa domain configuration member.

AU.R.E - Evaluate

On the main AU.R menu, type E on the Option line and press **Enter**. The [Figure 91 on page 83](#) is displayed:

Menu	Options	Info	Commands	Setup
zSecure Suite - Audit - Evaluate				
Command ==>				
Specify evaluation standards to run:				
- STIG		- PCI-DSS		
- GSD		- zSecure extra		
Specify members for other evaluation standards to run:				
- - - - -				
Evaluate rules applicable to systems that fit the following criteria				
Complex	_____	(complex or filter)		
System	_____	(system or filter)		
Compliance result selection				
- Compliant		- Non-compliant		- Overridden
- Assertions due in	__	(number of days)		
Output/run options				
- Show differences				
- Print format		- Send as e-mail		
- Background run		- Include test details		- Narrow print

Figure 91. Audit Compliance Evaluation menu

Perform the following steps:

1. Select the standard or standards that you want to verify against:

STIG	Security Technical Implementation Guide published by the US Defense Information Systems Agency (DISA-STIG)
PCI-DSS	Payment Card Industry Data Security Standard
GSD	IBM standard often employed in outsourcing (ISec / GSD331)
zSecure extra	The main purpose of zSecure extra is to implement controls that are similar to STIG controls but are about a different software product. Examples of the purpose of using zSecure extra controls is evaluating tape management or coupling facility structures configuration and settings.
Specify members for other evaluation standards to run	There are four pairs of fields. The first field of each pair selects the standard member in the second field. The standard member must contain CARLa that contains (or includes a member that contains) a STANDARD statement. The selections and member fields are shared with AU.R.C and are retained across sessions.

2. Optionally, you can limit your report by selecting a **Complex** or **System** name or filter to be used.
3. Select one or more compliance result options:
 - **Compliant** includes all compliant test results.
 - **Non-compliant** includes all non-compliant test results.
 - **Overrides** includes all compliant or non-compliant test that are set to produce a fixed result.
 - **Assertions** includes all tests that require an assertion, that is, no assertion record was found, or the assertion has expired or has been retracted. You can include the tests with assertions that will expire within *nn* number of days, by filling in this number in the **Assertions due in __ days** field.

If you do not select a compliance result option, all options are used.

4. To receive a printed report or email, select **Print format**; otherwise, the report is shown in display format. To receive email, also select **Send as e-mail**; the report is sent in either MIME/HTML or plain text, or as an attachment. To limit the width of the page to 79 chars (regardless of the actual print file record length), also select **Narrow print**.

With **Print format** selected, two reports are produced: the compliance rule set summary and the compliance statistics for the tested objects. If you also select **Include test details**, an additional report is produced: each individual rule set on a separate page.

Without **Print format** selected, three standard reports are displayed:

- : Shows the compliance rule set summary. This management summary can help to determine rule set compliance status or improvement.
- Shows the compliance statistics for tested objects. This management summary can help to determine object types compliance status or improvement.
- Shows the object test results sorted by rule set name. Non-compliant test results are sorted above compliant test results. These detailed compliance test results can help to determine what actions to take for which resources in order to improve the compliance status.

You can use the display format to zoom in across the following levels:

- Security complex level: shows the standards tested for each security database and systems related to that database.
- Rule set level: shows the number of non-compliant objects per rule set.
- Object level
- Individual test result overview level: allows asserting or overriding of the test.
- Detail level: shows the test results and configuration members. This level also allows asserting or overriding of the test.

5. Press **Enter** to generate the requested reports.

As an example, if you select STIG and no other options, the following (sample) panel is displayed:

```

zSecure Suite Display Selection                                Line 1 of 3
Command ==> _____ Scroll==> CSR

Name      Summary Records Title
- STDRULES      1      388 Standard rule set compliance summary
- STDTYPES      1       32 Standard object type compliance summary
- STDTESTS      1    87953 Standard compliance test
***** Bottom of Data *****

```

Figure 92. AU.R.E - Evaluate Display Selection panel

You can select to view the following reports:

- The “[STDRULES: Standard rule set compliance summary](#)” on page 84 report shows the compliance rule set summary. This management summary can help to determine rule set compliance status or improvement.
- The “[STDTYPES: Standard object type compliance summary](#)” on page 86 report shows the compliance statistics for tested objects. This management summary can help to determine object types compliance status or improvement.
- The “[STDTESTS: Standard compliance test results](#)” on page 87 report shows the object test results sorted by rule set name. Non-compliant test results are sorted above compliant test results. These detailed compliance test results can help to determine what actions to take for which resources in order to improve the compliance status.

STDRULES: Standard rule set compliance summary

When you select STDRULES on the [Figure 92 on page 84](#), the [Figure 93 on page 85](#) is displayed. It does not contain the actual test result details; instead, it shows compliance results at a higher level. The STDRULES summary includes all supported rule sets, including those for which no objects are found that must be tested. If there are no objects found that must be tested, the rule set is reported to be compliant. There is one line for each rule set that zSecure Audit supports for the pertinent standard.

Standard rule set compliance summary

Command ==> _____ Scroll==> PAGE
 2 Sep 2019 23:45

Complex	Ver	Pr	Standards							
NMPIPL87		30	1							
Standard			Pr	Rule sets						
RACF_STIG		30		388						
Rule set	Pr	Cm%	NS	TestPnt	Comply	NonCom	Unkn	Caption		
--- AAMV0010		0		1	0	0	1	Change Management Process		
--- AAMV0012		0		2	0	0	2	Supported system software		
/ AAMV0014		0		1	0	0	1	Upgrade OS plan		
--- AAMV0018		0		1	0	0	1	Software Patches		
--- AAMV0030	20	0		1	0	1	0	LNKAUTH=APFTAB		
--- AAMV0040	10	99		866	862	4	0	APF libraries exist		
--- AAMV0050		100		16	16	0	0	APF libraries unique		
--- AAMV0060		0		182	0	0	182	Review AC=1 modules		
--- AAMV0160	20	74		100	74	26	0	PPT programs exist		
--- AAMV0325		0		1	0	0	1	Accessible LPA		
--- AAMV0350		0		1	0	0	1	Accessible LINKLIST		
--- AAMV0370	20	25		4	1	2	1	SMF data collection		
--- AAMV0380		100		222	222	0	0	SMF record (sub)types		

Figure 93. STDRULES: Standard rule set compliance summary panel

For each rule set, this summary includes the following columns:

Rule set

The rule set number from the documented standard.

Pr

Noncompliant priority: 10 is low, 20 is medium, 30 is high. For each rule set that is reported as compliant, this column is blank.

Cm%

Compliance percentage. You can monitor this column to determine your progress on becoming compliant for the pertinent rule set.

NS

NS is a concatenated column. The N stands for a rule set that contains a test that is evaluated as Not Applicable. An S is shown when a rule set is suppressed.

TestPnt

Number of tested objects within this rule set.

Comply

Number of compliant objects.

NonCom

Number of noncompliant objects.

Unkn

Number of tests with an undecided/unknown outcome.

Caption

Short description of what this rule set tests.

You can use the S or / line command to access the rule set details. This panel includes the full rule set description as well as the standard name and version against which you evaluated your system.

```

Standard rule set compliance summary
Command ==> ----- Scroll==> PAGE
AAMV0030      LNKAUTH=APFTAB      2 Sep 2015 23:45
Line 1 of 30

Rule set
Rule set AAMV0030
Complex compliant with rules No Relative audit priority 20
Rule set non-comply severity Medium Site overruling set severity

Rule set description
LNKAUTH=APFTAB must be active to provide granular APF control; since this is
not default it must be specified explicitly in IEASYSxx.

Suppression and exemption
Rule set not applicable No
Rule set suppressed No
Reason rule set suppression

Resource location
Complex name NMPIPL87 Complex severity (importance) Medium

Data points tested
Compliant data points 0 Compliant data points (%) 0
Non-compliant data points 1 Non-compliant data points (%) 100
Undecided/unknown data points 0 Undecided data points (%) 0
Number of data points tested 1

Standard
Standard name RACF_STIG
Version of standard 6.47
***** Bottom of Data *****

```

Figure 94. STDRULES: rule set details

A severity is assigned to each rule set or rule; see the **Rule set non-comply severity** field. You can overrule this severity with a SITE_SEVERITY statement that assigns a different severity value as it applies to your organization. Possible values are high, medium, and low.

STDTYPES: Standard object type compliance summary

When you select STDTYPES on the [Figure 92 on page 84](#), the [Figure 95 on page 87](#) is displayed. It shows statistics about the newlist types that are used for the STIG compliance evaluation. For an explanation of the columns, see [Figure 93 on page 85](#). In addition, the **Exempt** column shows the number of exempted objects that are found for which an exception is coded.

```

Line 1 of 20
Standard object type compliance summary
Command ==> ----- Scroll==> PAGE
2 Sep 2015 23:45

Complex Ver Types
NMPIPL87 20
Type System Cm% Objects Comply NoCompl Unknown Exempt
-- as PL87 0 2 0 2 0 0
-- as_dd PL87 0 26 0 26 0 0
-- cics_region PL87 0 1 0 1 0 0
-- cics_transaction PL87 100 0 0 0 0 0
-- class PL87 50 2 1 1 0 0
-- id PL87 36 44 16 28 0 0
-- ipftp_region PL87 0 1 0 1 0 0
-- ip_resolver PL87 0 1 0 1 0 0
-- ip_stack PL87 100 1 1 0 0 0
-- mount PL87 100 0 0 0 0 0
-- r_acl PL87 81 143 117 26 0 0
-- r_profile PL87 100 1 1 0 0 0
-- r_stc PL87 12 811 99 712 0 0
-- racf_access PL87 18 1111 210 901 0 0
-- resource PL87 66 410 274 136 0 0
S sensdsn PL87 59 916 547 369 0 0
-- smfopt PL87 100 4 4 0 0 0
-- system PL87 0 1 0 1 0 0
-- unix PL87 100 0 0 0 0 0
-- unix_ps PL87 0 1 0 1 0 0
***** Bottom of Data *****

```

Figure 95. STDTYPES: Standard object type compliance summary

You can use the S or / line command to see the STIG compliance evaluation for a specific newlist type. The Figure 96 on page 87 panel shows in which rule sets the pertinent newlist type is used and whether this rule set is compliant, noncompliant, undecided/unknown, or exempt.

```

Line 1 of 29
Standard object type compliance summary
Command ==> ----- Scroll==> CSR
sensdsn NMPIPL87 ZS14 10 Oct 2018 23:45

Type
Test domain newlist type sensdsn
Complex name NMPIPL87
System name ZS14

Objects tested Percentage
Compliant objects 1243 Compliant objects (%) 51
Non-compliant objects 1148 Non-compliant objects (%) 48
Undecided/unknown objects 0 Undecided/unknown objects (%) 0
Exempt objects 0 Exempt objects (%) 0
Number of objects tested 2391

Records read for type
Number of records read 2431

Rule sets
Non-compliant rule sets AAMV0040 ACP00010 ACP00020 ACP00030 ACP00040
Non-compliant rule sets ACP00050 ACP00060 ACP00062 ACP00070 ACP00080
Non-compliant rule sets ACP00100 ACP00110 ACP00120 ACP00135 ACP00170
Non-compliant rule sets ACP00180 ACP00200 ACP00230 ACP00250 IFTP0080
Non-compliant rule sets ZCA1R000 ZCA1R001 ZCA1R003 ZFEP0015 ZHCDR000
Non-compliant rule sets ZHCDR002 ZICSR001 ZISFR000 ZMIMR000 ZMVZR000
Non-compliant rule sets ZMVZR001 ZNCPR000 ZNCPR001 ZNETR000 ZSMS0022
Non-compliant rule sets ZUSS0031 ZUSS0032 ZWMQ0040
Undecided rule sets
Compliant rule sets ACP00130 ACP00150 ITCP0040 ITCP0070 ZICSR000
Compliant rule sets ZSMS0020 ZSMS0032
***** Bottom of Data *****

```

Figure 96. STDTYPES: STIG compliance evaluation for newlist

STDTESTS: Standard compliance test results

When you select STDTESTS on the [Figure 92 on page 84](#), the [Figure 97 on page 88](#) is displayed. Although the STDRULES summary includes all supported rules sets, the STDTESTS summary contains only the rule sets that have test results. Rules sets without test results are ignored and not included in the STDTESTS report.

The screen and print output is sensitive to the screen width and line length. Narrow output shows rule-set captions, while wider output shows rule-set descriptions (see the **Narrow print** option in the AU.R panel in [Figure 76 on page 74](#)). [Figure 97 on page 88](#) shows an example of output for the rule set level on a screen with width 80.

For an explanation of the columns, see [Figure 93 on page 85](#).

Standard compliance test									
Line 1 of 366									
Command ==> ----- Scroll==> CSR									
Complex	Ver	Pr	Standards	NonComp	Unknown	Exm	Sup		
NMPIPL87		30	1	1	1	1			
Standard		Pr	Rule sets	NonComp	Unknown	Exm	Sup	Version	
RACF_STIG		30	370	136	77	139		6.47	
Rule set		Pr	Objects	NonComp	Unknown	Exm	Sup	Caption	
--- AAMV0010			1		1			Change Management Process	
--- AAMV0012			1		1			Supported system software	
--- AAMV0014			1		1			Upgrade OS plan	
--- AAMV0018			1		1			Software Patches	
--- AAMV0030	20		1	1				LNKAUTH=APFTAB	
--- AAMV0040	10		1317	37				APF libraries exist	
--- AAMV0050			17					APF libraries unique	
--- AAMV0060			142		142			Review AC=1 modules	
--- AAMV0160	20		143	24				PPT programs exist	
--- AAMV0325			1		1			Accessible LPA	
--- AAMV0350			1		1			Accessible LINKLIST	
--- AAMV0370	20		1	1	1			SMF data collection	
--- AAMV0380			219					SMF record (sub)types	
--- AAMV0400			1		1			Collect and retain SMF	
--- AAMV0410			1		1			ACP database recovery	
--- AAMV0420			1		1			ACP database backup	
--- AAMV0430			1		1			System DASD backups	
--- AAMV0440			1		1			PASSWORD data set	
--- AAMV0450			1		1			System programs	
--- AAMV0500			1		1			Protect shared sens ds	
--- ACP00010	30		24	20				PARMLIB protected	
--- ACP00020	20		9	8				Update on SYS1.LINKLIB	
--- ACP00030	30		9	8				Update on SYS1.SVCLIB	
--- ...									
--- RACF0430	20		1	1				SETROPTS PASSW HIST(10)	
S_ RACF0440	20		1	1				SETROPTS PASSW INT(60)	
--- RACF0445	20		1	1				SETROPTS PASSW MINCHA>0	
--- ...									
--- ZWMQ0060			1			1		MQ reslevel protection	

Figure 97. STDTESTS - Standard compliance test panel

Compliance by complex shows the number of standards and the results that are processed in this compliance evaluation run. This example shows that, for complex NMPIPL87, compliance is checked against RACF_STIG and that it is not fully compliant.

If only one standard is evaluated, the second summary level result is shown. If the complex is evaluated against more than one standard, a separate summary report is generated for each standard against which the system is evaluated.

The summary by standard shows the highest noncompliance priority, the total number of reported rule sets, and the number of noncompliant, unknown/undecided, and exempted rules within that standard.

The summary by rule set shows the number of affected objects by test or tests within a rule set, and the specific results for the pertinent rule set.

You can use the S or / line command to zoom in to the details of the report.

Line 1 of 2

Standard compliance test

Command ==> _____ Scroll==> CSR

Complex	Ver	Pr	Standards	NonComp	Unknown	Exm	Sup
NMPIPL87		30		1	1	1	1
Standard	Pr	Rule sets	NonComp	Unknown	Exm	Sup	Version
RACF_STIG	30	370	136	77	139		6.47
Rule set	Pr	Objects	NonComp	Unknown	Exm	Sup	Caption
RACF0440	20	1	1				SETROPTS PASSW INT(60)
Non	Unk	Exm	Class	System	Type	VolSer	Resource
Non			System	ZS14			ZS14
Cmp	Non	Unk	Exm	Test name	MembTest	Test description	
S_	Non			b.1b.PWDInterval60	CKAGR440	PASSWORD(INTERVAL) must be	
--	Cmp			b.1a.PWDIntervalNO	CKAGR440	PASSWORD(INTERVAL) should	

***** Bottom of Data *****

Figure 98. STDTESTS - Standard compliance test results panel

The example in Figure 99 on page 90 panel shows that your system is not compliant to one of the two tests for rule set RACF0440. You can use the S or / line command to read the full details for this test.

Standard compliance test b.1b.PWDInterval60

Command ==> `SETROPTS PASSW INT(60)` ----- Scroll==> CSR
RACF0440

Rule set description

The PASSWORD(INTERVAL) SETROPTS value must be set to 60 days.

Rule description

The PASSWORD(INTERVAL) SETROPTS value must be set to 60 days.

Test description

PASSWORD(INTERVAL) must be set to less than or equal to 60.

Class **Resource**
 System DINO

Assert/override

- Object asserted as
 - Test that requires assertion **No** Override that changes finding
 Assertion recorded by user End assertion validity
 Last assertion timestamp
 Person asserting test result
 Comment explaining assertion

Test result

Test value is compliant	No	Test is true	No
Non-compliant audit finding	Yes	Relative audit priority	20
Lookup against			
Actual value of test field	90		

Test definition

Test name	b.1b.PWDInterval60
Test lookup base field name	
Test field name	PWDINTERVAL
Relational operator	<=
Compliance comparison value	60

Rule

Rule name	RACF0440
Rule non-compliance severity	Medium Site overruling rule severity

Suppression and exemption

Rule set not applicable	
Exempt from rule	No
Rule suppressed	
Reason for rule suppression	

Resource location

- Complex name	DINO	Complex severity (importance)	Medium
- System name	DINO	Profile or data set type	
Test domain newlist type	system		

Class **Profile key**
 System

Domain

Domain name	System_options
Domain description	
Member name domain config	

Standard

Standard name	RACF_STIG
Version of standard	6.47

Test origin

- Rule set CARLa member	CKAGR440
- Domain defined CARLa member	CKAGCI20
- Test defined in CARLa member	CKAGR440
***** Bottom of Data *****	

Figure 99. STDTESTS - Standard compliance test results for test b.1b.PWDInterval60 for RACF0440

In the example in [Figure 99 on page 90](#), the **Test description** shows that the password interval must be less than or equal to 60 days. **Test results** shows that the actual value found is 90. The **Test definition** shows the details of the pertinent test. It shows that the test must be reported to be noncompliant if the

password interval is not less than or equal to (\leq) 60. For tests that are assertable, you can use the A (Assert) line command to assert compliance, non-compliance, or retract all earlier asserts. For tests that are not assertable, you can use the O (Override) line command to override the results to compliant or non-compliant or retract all earlier overrides and again report the calculated result.

Assert/Override shows that this rule is not assertable, and that no assert or override exists. In the selection field in front of the **Object asserted as** field, you can use the A (Assert) command for assertable tests to assert compliance, non-compliance, or retract all earlier asserts. In the selection field in front of the **Object asserted as** field, you can use the A (Assert) command for assertable tests to assert compliance, non-compliance, or retract all earlier asserts. Alternatively, use the O (Override) command to override the results to compliant or non-compliant, or retract all earlier overrides and again report the calculated result.

Suppression and exemption shows that this rule is not exempt. It is possible to code an exempt definition in the CARLa code for this rule so that the test shows that this rule is exempted from the pertinent rule.

If a rule is part of a rule set, the pertinent rule description generally differs from the rule set description.

Test origin shows in which CARLa member(s) the CARLa code for this rule set is stored. You can review this rule by entering a B (Browse) or V (View) in front of the line.

Chapter 10. SMF data queries

Note: The **SMF Query** function is available only in the zSecure Audit product.

The SMF displays can work with the live SMF data sets, SMF log streams, or with sequential SMF data. SMF data is produced by the IBM **IFASMFDP** or **IFASMF DL** programs. While you are getting familiar and experimenting with zSecure Audit for RACF, work with sequential SMF data rather than the live SMF files. Using static, sequential data provides more consistent results when you try something with slightly different parameters.

You must consider what SMF data you use with zSecure Audit. The amount of SMF data that is collected by z/OS varies greatly among different installations. In some cases, you can place a week of data in a reasonable DASD allocation (30 MB, for example). In other cases, that allocation might hold only an hour of SMF data collection. For simple experimentation with zSecure Audit for RACF, a set of SMF data in the 10-30 MB range is reasonable. If you must apply filtering to reduce the size of the data set, make sure that the record types shown in [Table 12 on page 93](#) are not filtered out.

Table 12. SMF Record types to not filter out of the SMF data	
Record type	Description
14	INPUT or RDBACK data set Activity
15	OUTPUT, UPDATE, INOUT, or OUTIN data set Activity
17	Scratch data set Status
18	Rename data set Status
30	Common Address Space Work
42	DFSMS Statistics and Configuration
60	VSAM Volume data set Updated
61	ICF Define Activity
62	VSAM Component or Cluster Opened
63	VSAM Catalog Entry Defined
64	VSAM Component or Cluster Status
65	ICF Delete Activity
66	ICF Alter Activity
67	VSAM Catalog Entry Delete
68	VSAM Catalog Entry Renamed
69	VSAM Data Space, Defined, Extended, or Deleted
80	RACF Processing
81	RACF Initialization
82	ICSF Integrated Cryptographic Service Facility
83-1	RACF Audit Record For Data Sets
90	System Status
92	z/OS UNIX File System Activity
102	Db2® Performance and Audit

Table 12. SMF Record types to not filter out of the SMF data (continued)	
Record type	Description
109	Firewall
110	CICS Statistics
119	TCP/IP Statistics
120	WebSphere® Application Server Performance

You can also run the zSecure Audit for RACF SMF analysis on a full SMF file with all record types present. zSecure Audit for RACF supports approximately 100 different SMF record types.

Defining input sets

When you opt to process SMF data, the data sets must be defined to zSecure Audit for RACF. Use this task to specify the data sets.

Procedure

Before you can process SMF data, you must specify the input data using the Setup File (SE.1) option.

1. Select option **SE** (Setup) from the Main menu and press Enter.
2. Select **1** (Input Files) and press Enter to open the Setup Input panel. For information about this panel, see [“Selecting the input set” on page 52](#)
3. Move the cursor to the input field (left-most position) on a line.
4. Type the letter I and press Enter to insert a new input set.
The Setup Input panel opens but without data.
5. Type a title such as Filtered SMF data set in the **Description** field below the Command line.
6. Move the cursor to the first **Data set or Unix file name** field. Type the name of the data set that contains SMF data. Then, press Enter.

If the data set name ends with .SMF, the file type (SMF) is automatically entered. If it does not end with .SMF, a panel, such as [Figure 100 on page 95](#), opens so that you can assign a type to the file you are defining.

```

Menu  Options  Info  Commands  Setup
-----
zSecure Admin+Audit for RACF - Setu Row 1 to 13 of 13
Command ==> _____ Scroll ==> CSR_

Select the type of data set or file

Type      Description
- ACCESS  RACF ACCESS monitor data set
- ACT.BACK The backup RACF database of your active system
- ACT.CKXLOG Live command execution logstream
- ACT.PRIM The primary RACF database of your active system
- ACT.SMF  The live SMF data set(s)
- ACT.SYSTEM Live settings
- ASSERT  Assertions, overrides, and sensitive resource configuration
- CKFREEZE A CKFREEZE data set
- CKRCMD  A file for generated RACF commands
- CKX.LOGSTR Command execution logstream
- CKX.LOG Command execution log
- COPY.RACF A copy of a single data set RACF database
- COPY.SEC A non-first component of a multiple data set RACF database
- COPY.TEMP The first component of a multiple data set RACF database
- SMF      VSAM or dumped SMF
- SMF.LOGSTR SMF logstream
- UNLOAD   An unloaded RACF database
- WEBACCESS IBM HTTP Server access log
- WEBERROR IBM HTTP Server error log

```

Figure 100. Assign file type

7. Select option **SMF** and press Enter to create a line that references the live SMF data.
8. Press PF3.

You return to the Input file panel with the new input set selected.

Tip: You can select multiple input sets at the same time. Consider defining a set for each file or couple of files. For example, define a live SMF set and a most recent unload of the RACF database and CKFREEZE data set and select both sets as input.

Results

Your input file settings look similar to the file settings in [Figure 101 on page 95](#).

```

Menu  Options  Info  Commands  StartPanel
-----
zSecure Admin+Audit for RACF - Setup - Input file      Row 1 from 5
Command ==> _____ Scroll ==> CSR_

(Un)select (U/S/C/M) set of input files or work with a set (B, E, R, I, D or F)

Description                                     Complex
- Filtered SMF data set                          selected
- Input set created 8 Apr 2005                    selected
- Active primary RACF data base                    DEMO
- Active backup RACF data base                     DEMO
- Active backup RACF data base and live SMF data sets DEMO
***** Bottom of data *****

```

Figure 101. Input file settings

To use live SMF data, you do not need to specify a data set. Type / in the **Type** field, and then press Enter. The panel in [Figure 100 on page 95](#) opens so that you can select option **ACT.SMF**.

This form is the most basic form of SMF input. In a more complex situation, you can combine live SMF plus the most recent *n* generations. Use Generation Data Groups (GDGs) of archived SMF data by listing multiple lines in the input set.

Creating SMF reports

Use this task to generate an SMF report about SMF records that match specified selection criteria.

Procedure

1. Select option **EV** (Events) in the Main menu and then press Enter.
2. Select option **2** (RACF Events) and then press Enter.

```
Menu      Options      Info      Commands      Setup
-----
Option    ==> zSecure Audit for RACF - Events - RACF events
-----
Enter "/" to select report(s)
- All events      Overview of all following RACF events (except IPL)
- Logging         RACF logging of all events except RACINIT
- Not normal      RACF access not due to normal profile access
- Warnings        RACF access due to profiles in warning modes
- Violations      RACF access violations
- Commands        RACF command auditing
- CKGRACF         zSecure Admin CKGRACF commands
- IPL RACF        RACF initialization
```

Figure 102. SMF RACF events display

3. Select **All events** in the RACF events panel, and then press Enter.

The SMF selection panel shown in [Figure 103 on page 96](#) is common to a number of SMF reports.

```
Menu      Options      Info      Commands      Setup
-----
Command    ==> zSecure Admin+Audit for RACF - Events - SMF selection
-----
Select SMF records that fit all of the following criteria
Use EGN masks for selection criteria
Userid . . . . . IBMUSER
Jobname . . . . .
Terminal . . . . .
Dataset name . . .
Profile class . . .
Profile key . . .
Level . . . . . -- -- (installation defined resource level)

Time      From      Until      Intended access at least
----      :      :      6 1. Execute 2. Read
Date      :      :      3. Update 4. Control
Weekday    :      :      5. Alter 6. All access

Show all   _ Success _ Warning _ Violation
```

Figure 103. SMF selection criteria

Only SMF records that match your specified selection criteria are processed. Any fields in this panel that you do not use are not considered in the selection process. For this panel:

- The **Userid**, **Jobname**, **Terminal**, **Profile class**, **Profile key**, and **Data set name** fields each accept one or more search strings that are separated by blanks. Wildcards, such as %, *, and ** can be used. A single asterisk with no other parameters in the **Userid** field selects all SMF records that can be attributed to a RACF user.
- You can use the **Level** field to select by data set or resource level.

Use the first field to specify the operator to determine a level present in the profile. Use < and <= for selection less than or equal to the level. Use > or >= for high level, = for exact level, != and <> for all but the specified level.

The second field is to specify a number for the data set or resource level. This level is not set or updated by IBM utilities, but it can be used by the installation.

- Your user ID is not automatically prefixed to data set names.
- Times are specified in 24-hour *HHMM* format.
- Dates are specified as *YYYY-MM-DD*, *DDMMYYYY* or *YYYY/DDD*; for example, 2012-03-01, 01MAR2012, or 2012/301. A range of dates is separated by a colon; for example, 10APR2005:14APR2012.
- Weekdays are spelled in English with the first three letters; for example, Mon for Monday.
- In the **Intended access at least** field, you can select only access events that required, at least, the authority you specify.

After the selection panel, an exclusion panel opens. The exclusion panel looks similar to the selection panel in [Figure 103 on page 96](#). If an SMF record passes the selection process, it can still be rejected by the exclusion parameters. You do not need to specify any exclusion parameters. As an example, select all accesses to data sets with the name `SYS*. *` with access level at least UPDATE, but exclude access to data set `SYS1.BROADCAST`.

What to do next

After the selection and exclusion panels, there are panels to control the report that generated. These panels can be used to limit the number of input records. Especially if your SMF file is huge, limit the number of output records and format output for displaying or printing.

For this example, do not select any CKFREEZE data set to use with SMF reports. Make sure that there is no / before **Use CKFREEZE data** in the SMF process options panel. For RACF only purposes, this option is not needed and can increase the TSO region size required. You *do* need this option to format UNIX file system records (type 92).

The SMF search produces an overview report. One line for each SMF record and a statistical summary is displayed. You can enter an **S** line command for a detailed display of any of the records.

zSecure Audit for RACF processing of SMF records is fairly straightforward. Its power lies in good use of the selection and exclusion panels and the high-speed processing. Nevertheless, effective use of SMF processing requires planning on your part. You must have reasonable amounts of recent SMF data available that is easily accessible online or through HSM facilities.

zSecure Audit for RACF supplements any SMF event record with information from the RACF data source if such information is missing from the record. In this way, z/OS event records like type 14 and 15 can be attributed to a RACF user ID even if the Jobname in the SMF record does not match the appearance of the RACF user ID.

Auditing types of users

Before you begin

To audit a user event trail, you must have an input data set that contains SMF data selected first. Then, complete the following steps:

Procedure

1. Return to the Main menu.
2. Select option **EV.U** (Event, User events) to open the User Selection panel that is shown in [Figure 104 on page 98](#).

This panel is the starting point for finding the audit trail of one or more specific users or finding events that are caused by some types of users.

Menu	Options	Info	Commands	Setup
zSecure Admin+Audit for RACF - Events - User Selection				
Command ==> _ start panel				
Show records that fit all of the following criteria:				
Userid	-----	(userid or EGN mask)		
Owned by	-----	(group or userid, or EGN mask)		
System	-----	(system name or EGN mask)		
Name	-----	(name/part of name, no filter)		
Installation data	-----	(scan of data, no filter)		
Jobname	-----	(job name or EGN mask)		
Terminal	-----	(Terminal id or EGN mask)		
Advanced selection criteria				
/ User actions	-	User attributes	-	Date and time
- Data set selection	-	HFS selection	-	Resource selection
- DB2 selection	-	CICS selection	-	Omegamon selection
- IP selection				
Output/run options				
- Include detail	-	Summarize	-	Specify scope
- Output in print format	-	Customize title	-	Send as e-mail
- Run in background		Sort differently		

Figure 104. EV.U User Selection panel

3. In the **Advanced selection criteria** section, select **User actions**, and press Enter.
You now see a selection panel with the types of actions recognized.
4. Type a / in **RACF/CKGRACF commands** issued and another / in front of **Successful**. Then, press Enter to open the RACF command overview panel that is shown in [Figure 105 on page 98](#).

This panel shows the successful RACF commands that are issued in your system. You can scroll right by using PF1.

Event log record detail information			1 s elapsed, 0.7 s CPU	
Command ==> _			Scroll==> CSR_	
			4Apr05 09:17 to 4Apr05 09:21	
Date	Time	Description		
-- 04Apr2005	09:17:16	RACF PERMIT success for IBMUSER: PERMIT FACILITY \$C2R.OPT		
-- 04Apr2005	09:17:32	RACF PERMIT success for IBMUSER: PERMIT FACILITY \$C2R.OPT		
-- 04Apr2005	09:17:46	RACF PERMIT success for IBMUSER: PERMIT FACILITY \$C2R.OPT		
-- 04Apr2005	09:17:53	RACF SETROPTS success for IBMUSER		
-- 04Apr2005	09:21:22	RACF PERMIT success for IBMUSER: PERMIT FACILITY \$C2R.OPT		
-- 04Apr2005	09:21:30	RACF PERMIT success for IBMUSER: PERMIT FACILITY \$C2R.OPT		
-- 04Apr2005	09:21:49	RACF PERMIT success for IBMUSER: PERMIT FACILITY \$C2R.OPT		
-- 04Apr2005	09:21:55	RACF SETROPTS success for IBMUSER		
***** BOTTOM OF DATA *****				

Figure 105. RACF command event log records overview

5. To see more detail than a one-line summary per record, select option **Include detail** in the **Output/run options** section of the panel that is shown in [Figure 104 on page 98](#) and rerun the query.
6. In the RACF Event log overview panel, select a record to open the panel that is shown in [Figure 106 on page 99](#).

Now, you can see the details; for example, the full command and fields that identify the user.


```

Event log record detail information
Command ===> -----
Line 1 of 43
Scroll==> CSR_
4Apr05 09:17 to 4Apr05 09:21

Description
RACF PERMIT success for IBMUSER: PERMIT FACILITY $C2R.OPTION.HD.8

Record identification
- Jobname + id: IBMUSER
- SMF date/time: Wed 4 Apr 2005 09:17:46.59
- SMF system: DEMO record type: 80 record no: CKR1SM01 3013

Event identification
RACF event description      Permit command (Success:No violations detected)
RACF event qualifier        0
RACF descriptor for event   Success
RACF reason for logging     Class Special
SAF authority used          Special
Audit/message logstring

RACF command
PERMIT '$C2R.OPTION.HD.8' ACCESS(READ) CLASS(FACILITY) ID(IBMUSER)

```

Figure 106. RACF command event log record detail panel

Library change detection

Note: This function is available only in zSecure Audit for RACF.

Using the **Library Change Detection** function in a realistic manner requires a certain amount of planning and time. After you review the short description that follows, you can decide whether you want to use this function during your evaluation. The function is described, in detail, in the *Library Audit* section of the *IBM Security zSecure Admin and Audit for RACF: User Reference Manual*.

The **Library Change Detection** function provides a library update report. It is used to find and display changes to members that consist of load modules or source text of partitioned data sets. It contains logic to track libraries on shared DASD in a sysplex environment and in an SMS-managed environment. The basic function is built around zSecure Collect data for every member in every library that is monitored. All system libraries are included, although you can also exclude them. You also can specify other libraries to be monitored. zSecure Collect for z/OS examines each member of these libraries and computes a digital signature for the data in the member. This digital signature is recorded in the CKFREEZE data set produced by zSecure Collect for z/OS.

Library change detection is useful for internal auditors. Using the **Library Change Detection** function can be a powerful tool, especially for internal auditors. By comparing data from month to month or year to year, the auditor can identify every program that changed during that period. The programs can be either source code or load module. This function is not limited to system libraries. Application libraries also can be monitored.

The default CKFREEZE data sets, such as the ones you created when you build your current input sets, do not contain the necessary data for library management. You must submit another zSecure Collect for z/OS job to gather library member data. If you want to try this method, use the **Freeze** option (Option **0**) in the panel that is shown in [Figure 107 on page 100](#).

This option asks for your parameters so you can submit the necessary job. The best option for you to select is probably **System Libraries**, but you can specify any libraries that you want. You can elect to reuse your existing CKFREEZE data set. The new CKFREEZE data set has all the default data from your z/OS tables but not from VTOC, VVDS, catalogs, and so on. It also has the new library member data. This zSecure Collect for z/OS job takes a few minutes to run. It must open and read every member of the selected libraries.

```

Menu   Options   Info   Commands   Setup   StartPanel
-----
zSecure Audit for RACF - Audit - Libraries
Option ==> -----
0   Freeze      Calculate new digital signatures
1   Lib all     Overview of all libraries
2   Lib changes Overview of all libraries with changes
3   Status      Show member status
4   Changes     Identify members with changes
5   Scan        Show members flagged by SCAN function
6   Duplicates  Identify identical members
7   Application Members summarized by application
8   Prefix      Members summarized by member prefix (component code)
9   PTF - ZAP   Members touched by PTF or ZAP

```

Figure 107. Primary library update analysis panel

Library change detection requires multiple generations of CKFREEZE data sets; you must define at least two in your input set. With some planning, GDGs are ideal for this purpose. zSecure Audit for RACF compares the signatures in the various CKFREEZE data sets and produces reports. Not all functions of library update analysis require two CKFREEZE data sets. Options 1, 3, 5, 6, 7, 8, and 9 can be used with just one or more CKFREEZE data sets. Other options are available as part of library monitoring. For example, zSecure Collect for z/OS can examine library members for specific text or hexadecimal strings anywhere in the member or for usage of specific SuperVisor Calls (SVCs). It is a good way to answer the frequently asked question of which program is using an SVC.

These options are described in the *IBM Security zSecure Admin and Audit for RACF*: *User Reference Manual*. During data collection for CKFREEZE, the hexadecimal searches can also be used to locate typical authorization code fragments. The option to identify duplicate members can be useful. It can detect library members in all the libraries that are scanned when the CKFREEZE data set was built with duplicate member names, or with duplicate contents regardless of the member name. There is no reasonable way to do either of these functions with standard z/OS utilities. Yet, detection of duplicate members is critical for effective software maintenance and for audit control.

To use the Library Change Detection functions, your input file setup might look similar to this example:

```

Menu   Options   Info   Commands
-----
zSecure Audit for RACF - Setup - Input F      Row 1 from 5
Command ==> -----                        Scroll ==> CSR_
(Un)select (U/S) set of input files or work with a set (B, E, R, I, D or F)

Description                                Complex
- CKFREEZE dd 4 Apr 2005                    selected
- CKFREEZE dd 8 Apr 2005                    selected
- Active primary RACF data base              DEMO
- Active backup RACF data base               DEMO
- Active backup RACF data base and live SMF data sets DEMO
***** Bottom of data *****

```

Figure 108. Input set definition

This is a rather primitive input structure, but it can be used for evaluation. This section does not contain information about the SMF data set that is not required for the library functions. You would collect the OLD data first by using the **Freeze** option to generate and submit the necessary job. Then, collect the NEW data a few days later. For long-term use, you would probably use generation data groups, such as 'HLQ.CKFREEZE(0)' and 'HLQ.CKFREEZE(-1)'.

An input set can contain any reasonable number of SMF and CKFREEZE data sets, and one RACF database. The RACF database can be the active RACF database, unloaded RACF data, a copy of a RACF database, or an active RACF database from another system. It can consist of any number of data sets.

Chapter 11. Resource-based reports for RACF resources

The Resource reports option (**RE**) is available from the Main menu.

Menu	Options	Info	Commands	Setup

zSecure Admin+Audit for RACF - Main menu				

Option	====>	-----		
SE	Setup	Options and input data sets		
RA	RACF	RACF Administration		
AU	Audit	Audit security and system resources		
RE	Resource	Resource protection reports		
C	CICS	CICS region and resource reports		
D	DB2	DB2 region and resource reports		
F	FIM	File integrity monitoring		
H	Hardware	Hardware like physical DASD volumes		
I	IP stack	TCP/IP stack reports		
J	JES	Job entry subsystem and started tasks		
K	Keys	Cryptographic key information		
M	IMS	IMS control region and resource reports		
N	VTAM	VTAM reports		
O	z/OS	z/OS options		
P	Programs	Executable programs, especially authorized		
Q	MQ	MQ region and resource reports		
T	Trusted	Trusted users and sensitive resources reports		
U	Unix	Unix filesystem reports		
AM	Access	RACF Access Monitor		
EV	Events	Event reporting from SMF and other logs		
CR	Command review	Review and run commands		
CO	CARLa	Work with CARLa queries and libraries		
IN	Information	Information and documentation		
LO	Local	Locally defined options		
X	Exit	Exit this panel		

Input complex: **DAILY**

Figure 109. zSecure Audit for RACF Main menu

It provides access to display and reporting options for the following RACF resources:

- “CICS region and resource reports” on [page 102](#)
- “Db2 region and resource reports” on [page 104](#)
- “File integrity monitoring” on [page 107](#)
- “Hardware displays” on [page 109](#)
- “IP Stack reports” on [page 109](#) (only available in zSecure Audit)
- “Job entry subsystem and started tasks” on [page 110](#)
- “Cryptographic key information (RE.K)” on [page 110](#)
- “IMS region and resource reports” on [page 111](#)
- “VTAM application reports” on [page 114](#) (only available in zSecure Audit)
- “z/OS settings” on [page 115](#)
- “Executable programs reports” on [page 116](#)
- “MQ region and resource reports” on [page 117](#)
- “Trust relations reports” on [page 119](#) (only available in zSecure Audit)
- “UNIX file system reports” on [page 120](#)

CICS region and resource reports

Use the **RE.C** option on the Main menu to select and display CICS region, transaction, and program data.

The report data is obtained from a CKFREEZE data set that is created by running zSecure Collect APF-authorized.

When you select **RE.C**, the panel that is shown in [Figure 110 on page 102](#) is displayed.

The **T** and **P** options are features that are provided by the zSecure Audit products.

Menu	Options	Info	Commands	Setup	Startpanel

zSecure Suite - Resource - CICS					
Option ==> -----					
R	Regions	CICS region reports			
T	Transactions	CICS CICS transactions selection and reports			
P	Programs	CICS programs selection and reports			

Figure 110. CICS Resource panel

CICS region reports

In the CICS Resource panel in [Figure 110 on page 102](#), select the **R** option to display the CICS Regions selection panel in [Figure 111 on page 102](#).

Use this panel to enter selection criteria in one or more fields to limit the CICS region configuration data. When you specify selection criteria, the output includes only those records that match all the selection criteria. Filters can be used in some of the selection fields. To find out whether a field supports filters, use the field-sensitive help function (PF1).

You can also select output and run options in the CICS Regions selection panel. Or, select no options and report data is processed as soon as you press Enter. The overview panel that is displayed shows a summary of the CICS region records that match your selection criteria.

Menu	Options	Info	Commands	Setup

zSecure Suite - CICS - Regions				
Command ==> -----				
Show CICS regions that fit all of the following criteria:				
Jobname	-----	(jobname or filter)	
VTAM applid	-----	(applid or filter)	
SYSIDNT	-----	(identifier or filter)	
Complex	-----	(complex or filter)	
System	----	(system or filter)	
Advanced selection criteria				
_	Region security settings	_	Region attributes	_ Classes
Output/run options				
_	Show differences			
_	Print format		Customize title	Send as e-mail
	Background run		Full page form	

Figure 111. CICS Regions selection panel

For detailed information, see the *IBM Security zSecure Admin and Audit for RACF: User Reference Manual* and the online help.

CICS transaction reports

In the CICS Resource panel in [Figure 110 on page 102](#), select the **T** option to display the CICS Transactions selection panel in [Figure 112 on page 103](#).

Use this panel to enter selection criteria in one or more fields to limit the CICS transaction data. When you specify selection criteria, only those records that match all criteria are included in the output. Filters can

be used in some of the selection fields. To find out whether a field supports filters, use the field-sensitive help function (PF1).

To create a simulate report, use the report type option **Simulate access for specified resource**.

You can also select output and run options in the CICS Transactions selection panel. Additionally, you can select no options and report data is processed as soon as you press Enter. The overview panel that is displayed shows a summary of the CICS transaction records that match your selection criteria.

Menu	Options	Info	Commands	Setup
zSecure Suite - CICS - Transactions				
Command ===> -----				
Show CICS transactions that fit all of the following criteria:				
Transaction	----			(transaction or filter)
Program	-----			(program name or filter)
Jobname	-----			(jobname or filter)
VTAM applid	-----			(applid or filter)
SYSIDNT	----			(identifier or filter)
Complex	-----			(complex or filter)
System	----			(system or filter)
Type of report	1	1.	1.	Show resource definitions
		2.	2.	Simulate access for specified resource
Advanced transaction selection criteria				
- Security settings		- Attributes		
Output/run options				
1 0. No summary		1. Summarize by region	2. Summarize by transaction	
- Show differences				
- Print format		Customize title	Send as e-mail	
- Background run		Full page form		

Figure 112. CICS Transactions selection panel

For detailed information, see the *IBM Security zSecure Admin and Audit for RACF: User Reference Manual* and the online help.

CICS program reports

In the CICS Resource panel in Figure 110 on page 102, select the **P** menu option to display the CICS Programs selection panel in Figure 113 on page 104.

Use this panel to enter selection criteria in one or more fields to limit CICS program data. When you specify selection criteria, only those records that match all criteria are included in the output. Filters can be used in some of the selection fields. To find out whether a field supports filters, use the field-sensitive help function (F1).

To create a simulate report, use the report type option **Simulate access for specified resource**.

You can also select output and run options in the CICS Programs selection panel. Additionally, you can select no options, and report data is processed as soon as you press Enter. The overview panel that is displayed shows a summary of the CICS program records that match your selection criteria.

Menu	Options	Info	Commands	Setup
zSecure Suite - CICS - Programs				
Command	===>	-----		
Show CICS programs that fit all of the following criteria:				
Program	-----	(program name or filter)	
Program type	4	1. Program	2. Mapset 3. Partitionset 4. All
Jobname	-----	(jobname or filter)	
VTAM applid	-----	(applid or filter)	
SYSIDNT	-----	(identifier or filter)	
Complex	-----	(complex or filter)	
System	-----	(system or filter)	
Type of report	1	1. Show resource definitions 2. Simulate access for specified resource	
Advanced transaction selection criteria				
-	Security settings	-	Attributes	
Output/run options				
-	0. No summary	1. Summarize by region	2. Summarize by program	
-	Show differences			
-	Print format	Customize title	Send as e-mail	
	Background run	Full page form		

Figure 113. CICS Programs selection panel

For detailed information, see the *IBM Security zSecure Admin and Audit for RACF: User Reference Manual* and the online help.

Db2 region and resource reports

Use the **RE.D** option on the Main menu to select and display Db2 region and resource data.

The Db2 Resource panel shown in [Figure 114 on page 104](#) is then displayed.

Menu	Options	Info	Commands	Setup	Startpanel
zSecure Suite - Resource - DB2					
Option	===>	-----			
R	Regions	Region overview and system privileges (DSNADM, MDSNSM)			
BP	Buffer pools	Memory areas that can hold data pages			
CL	Collections	Groups of packages with the same qualifier			
DB	Databases	Sets of tables, indexes, and table spaces			
GV	Variables	Global variables (session scope named memory variables)			
JR	Java archives	Sets of files comprising Java applications			
PK	Packages	Packages (pre-bound SQL statements)			
PN	Plans	Plans (control structures created during BIND)			
SC	Schemas	Logical classifications of database objects			
SG	Storage groups	Sets of storage objects (volumes)			
SP	Stored procs	Stored procedure and user function routines			
SQ	Sequences	User defined objects defining a numerical sequence			
TB	Tables/views	Tables and views			
TS	Table spaces	Table spaces (data set name space for storing tables)			
UT	User data types	Distinct types			

Figure 114. Db2 Resource panel

Note: In zSecure Admin, only the Regions report is available.

Db2 region reports

Select the **R** menu option to specify criteria to limit Db2 data in the report output.

In the Db2 Resource panel in [Figure 114 on page 104](#), select the **R** menu option to display the Db2 Regions selection panel in [Figure 115 on page 105](#).

Menu	Options	Info	Commands	Setup
zSecure Suite - DB2				
Command ==> _____				
Show DB2 regions that fit all of the following criteria:				
Jobname	_____		(jobname or filter)	
Local LU name	_____		(luname or filter)	
Local site name	_____		(name or filter)	
DB2ID	_____		(identifier or filter)	
Group attachment name	_____		(name or filter)	
Complex	_____		(complex or filter)	
System	_____		(system or filter)	
Advanced selection criteria				
_ Region security settings		_ Classes used by DB2		
Output/run options				
_ Show differences		Customize title		Send as e-mail
_ Print format		Full page form		
_ Background run				

Figure 115. Db2 Region selection panel

Use this selection panel to enter your selection criteria in one or more fields to limit the data. When you specify selection criteria, the output includes only those records that match all the selection criteria. Filters can be used in some of the selection fields. To find out whether a field supports filters, use the field-sensitive help function (PF1).

You can also select output and run options in the Db2 regions selection panel. Additionally, you can select no options and report data is processed as soon as you press Enter. The overview panel that is displayed shows a summary of the records that match your selection criteria.

For detailed information, see the online help and the *zSecure Admin and Audit for RACF User Reference Manual*.

Db2 resource reports

Select the two characters representing the option of your choice to specify criteria to limit Db2 output data.

In the Db2 Resource panel in Figure 114 on page 104, select the two characters for the option of your choice. A selection panel is then displayed. For example, for Db2 Bufferpools.

Menu	Options	Info	Commands	Setup
zSecure Suite - DB2 - Buffer pools				
Command ==> _____				
Show DB2 bufferpools that fit all of the following criteria:				
Bufferpool name . . .	_____		(name or filter)	
DB2ID	_____		(identifier or filter)	
Complex	_____		(complex or filter)	
System	_____		(system or filter)	
Advanced selection criteria				
_ SAF settings		_ Further selection		
Output/run options				
_ 0. No summary		1. Summary by region	2. Summary by bufferpool	
_ Show differences				
_ Print format		Customize title	_ Send as e-mail	
_ Background run		Full page form		

Figure 116. Db2 bufferpools selection panel

Use this panel to enter your selection criteria in one or more fields to limit the data. To see detailed field information, press **F1** on any field. This field-sensitive help function also describes which fields on the selection panels support filters. You can also find descriptions of the field names in "SELECT/LIST Fields" in *zSecure CARLa Command Reference*.

When you specify selection criteria, the output includes only those records that match all the selection criteria. Some selection panels include some advanced selection criteria:

SAF settings

When you select SAF settings, a SAF settings selection panel is displayed. For example, for Db2 Bufferpools:

Menu	Options	Info	Commands	Setup
zSecure Suite - DB2 - Buffer pools				
Command ==> _____				
Show DB2 bufferpool records that fit all of the following criteria:				
SAF resource class . . . _____ (class or filter)				
SAF resource name . . . _____				

Figure 117. Db2 Bufferpools SAF settings selection panel

Further selection

When you select Further selection, a further selection panel is displayed. For example, for Db2 Schemas:

Menu	Options	Info	Commands	Setup
zSecure Suite - DB2 - Schemas				
Command ==> _____				
Show DB2 schemas that fit all of the following criteria:				
Number of Datatypes . . . _____ (operator+number)				
Number of Indexes . . . _____ (operator+number)				
Number of JARs . . . _____ (operator+number)				
Number of Routines . . . _____ (operator+number)				
Number of Sequences . . . _____ (operator+number)				
Number of Tables . . . _____ (operator+number)				
Number of Triggers . . . _____ (operator+number)				
Number of Views . . . _____ (operator+number)				

Figure 118. Db2 Schemas further selection panel

Other settings

When you select Other settings, a next selection panel is displayed. For example, for Db2 Databases:

Menu	Options	Info	Commands	Setup
zSecure Suite - DB2 - Databases				
Command ==> _____				
Show DB2 databases that fit all of the following criteria:				
Authid of owner . . . _____				
Authid of creator . . . _____				
Creation date . . . _____ (operator+yyyy-mm-dd or				
Alter date . . . _____ ddMMMyyy + hh:mm:ss or				
hh:mm)				
Select flag fields (Y/N/blank)				
_ Implicitly created				

Figure 119. Db2 databases security settings selection panel

You can select output and run options or select no options. Report data is processed as soon as you press **Enter**. The overview panel that is then displayed shows a summary of the records that match your selection criteria. For example, for Db2 Java™ archive records (JARs):


```

          DB2 jars display                               Line 1 of 5
Command ==> ----- Scroll==> CSR
All DB2 jar records                               3 Jan 2013 07:18
  JAR name      Complex DB2I Schema Owner 0 Created
-- DS_20110622080035 ADCDPL DBAG DPACK DPACK 22Jun2011 08:06
-- DS_20110801131621 ADCDPL DBAG DPACK DPACK 1Aug2011 13:18
-- DS_20110822105345 ADCDPL DBAG DPACK DPACK 22Aug2011 10:59
-- DS_20110822110830 ADCDPL DBAG DPACK DPACK 22Aug2011 11:09
-- DS_20110920131946 ADCDPL DBAG DPACK DPACK 20Sep2011 13:21
***** Bottom of Data *****

```

Figure 120. Db2 JARs overview display report

This data can only be listed if a CKFREEZE file is created during an APF-authorized run of zSecure Collect (the CKFCOLL program). For information about creating such a CKFREEZE file, see "zSecure Collect for z/OS" in *zSecure Admin and Audit for RACF User Reference Manual*.

On this overview display panel, you can use action commands. For example:

R

Shows region information.

S

Shows additional information

For detailed information on resource reports and complete lists of available action command for each report type, see the online help (F1) and "Resource reports for z/OS" in *zSecure Admin and Audit for RACF User Reference Manual*.

File integrity monitoring

Use the **RE.F** option on the Main menu to select and display file integrity monitoring data.

The following panel is then displayed:

```

Menu      Options      Info      Commands      Setup      Startpanel
-----
Option ==> -----
zSecure Suite - Resource - FIM
M  Members      Members
D  Data sets     Data sets

```

Figure 121. File integrity monitoring menu

For more detailed information than documented in these sections, see the online help and *zSecure Audit for ACF2 User Reference Manual*.

Members (RE.F.M)

In the File integrity monitoring menu, select the **M** menu option. The initial data set Members selection panel is then displayed.

Menu	Options	Info	Commands	Setup	Startpanel
zSecure Suite - FIM - Members					
Command ===> _____					
Show records that fit all of the following criteria					
Data set member	_____	(member name or EGN mask)			
Data set name	_____				
Volume serial	_____	(volser or EGN mask)			
System	_____	(system name or EGN mask)			
Sensitivity	_____	(sensitivity, no masking)			
Fingerprint	_____	(Y/N/blank)			
Program members	_____	(Y/N/blank)			
Additional selection criteria					
_ Other fields		_ Program attributes		_ PDF statistics	
Output/run options					
Summarize by _	1. Complex	3. Volser	5. Member	7. Duplicates	
	2. System	4. DSN	6. Application	8. TTR	
_ Show differences					
_ Print format	Send as e-mail				
Background run	Full detail form Narrow print				

Figure 122. Members selection panel

Use this panel to enter selection criteria in one or more fields to limit the data set member data returned. When you specify a selection criteria, the output includes only those records that match all the selection criteria. You can use filters in some of the selection fields. To find out whether a field supports filters, use the field-sensitive help function (PF1).

You can also select output and run options in the Members selection panel, or select no options, and report data is processed as soon as you press Enter. The overview panel that is displayed shows a summary of the members that match your selection criteria. Note that program and non-program members are always grouped separately.

Data sets (RE.F.D)

In the [File integrity monitoring menu](#), select the **D** menu option. The [Data sets selection panel](#) is then displayed.

Menu	Options	Info	Commands	Setup	Startpanel
zSecure Suite - FIM - Data sets					
Command ===> _____					
Show data sets that fit all of the following criteria:					
Data set name	_____				
Volume serial	_____	(volser or EGN mask)			
System	_____	(system or EGN mask)			
Encryption key label	_____				
Sensitivity	_____				
Additional selection criteria					
_ Other attributes					
Output/run options					
Summarize by _	1. Complex	3. Volser	5. Key label	7. Sensitivity	
	2. System	4. DSN	6. HLQ	8. Tape complexes	
_ Show differences	_ Only duplicates		_ Include scratch		
_ Print format	Send as e-mail				
Background run	Full detail form Narrow print				

Figure 123. Data sets selection panel

Use this panel to enter selection criteria in one or more fields to limit the data set names that are returned. When you specify a selection criteria, the output includes only those records that match all the selection criteria. You can use filters in some of the selection fields. To find out whether a field supports filters, use the field-sensitive help function (PF1).

You can also select **Output/run options** in the [Data sets selection panel](#) panel, or select no options, and report data is processed as soon as you press **Enter**. The overview panel that is displayed shows a list of the data set names that match your selection criteria.

Hardware displays

Use the **RE.H** option on the Main menu to select and display the Hardware displays resource panel.

When you select **RE.H**, the panel that is shown in [Figure 124 on page 109](#) is displayed.

Menu	Options	Info	Commands	Setup	Startpanel

zSecure Admin+Audit for RACF - Resource - Hardware					
Option ==>					
C	CEC	Systems by CEC and LPAR			
D	DASD	Physical disk volumes			

Figure 124. Hardware displays resource panel

The **C** option groups the systems first by virtual machine, then by LPAR or z/VM image, and lastly by the CPU serial number of the Central Electronics Complex (CEC). In contrast to **RE.O.S**, this display only shows the configuration parameters of the system. The purpose of the display is to show where the lack of physical separation can impose additional risks thorough cross-virtual-machine authorities or cross-LPAR authorities.

Select the **D** option to display the DASD Volume Protection and Sharing panel that shows the DASD volumes encountered in the CKFREEZE file and the RACF database. This display is the same as the **DASDVOL** display in **AU.S** category MVS Extended. For a print option of the report, go to **AU.S**.

IP Stack reports

Use the **RE.I** option to select and display TCP/IP configuration and statistics data.

This data is obtained from a CKFREEZE data set created by running zSecure Collect APF-authorized with the TCPIP=YES parameter. You can also report on SMF events that are related to IP configuration data by using the **EV.I** menu option.

When you select **RE.I** from the Main menu, the panel that is shown in [Figure 125 on page 109](#) is displayed.

Menu	Options	Info	Commands	Setup

zSecure Suite - Resource - IP stack Selection				
Command ==> _____ _ start panel				
Show TCP/IP stack configuration data that fit all of the following criteria:				
Stack name _____ (name or filter)				
System _____ (system or filter)				
Sysplex _____ (sysplex or filter)				
Output/run options				
- Ports		- Rules		- VIPA
- Interfaces		- Routes		- Netaccess
- AUTOLOG		- Resolver		- FTP daemon
- Telnet server/ports		- SSH daemon		- Inetd daemon
- Show differences				
- Print format		Send as e-mail		Background run

Figure 125. IP stack Selection panel

From the IP stack Selection panel, you can limit the TCP/IP stack configuration data by entering selection criteria into one or more fields. When you specify selection criteria, only records that match all criteria are included in the output. Filters can be used in some of the selection fields. For a description of the selection fields and to determine whether a field supports filters, use the field-sensitive help function (PF1).

You can also specify Output and run options on the Selection panel. You can use the run options to specify more selection criteria for specific types of IP configuration data. Use the output run options to specify report and print options. When you select any of these options, the corresponding panels are displayed when you press Enter on the IP stack Selection panel.

If you do not select any Output or run options, the data is processed as soon as you press Enter on the IP Stack Selection panel. An overview panel is immediately displayed with a summary of the IP configuration records that match the selection criteria you specified.

See the *IBM Security zSecure Admin and Audit for RACF: User Reference Manual* for more detailed information about these reports.

Job entry subsystem and started tasks

Use the **RE.J** option on the Main menu to select and display Job entry subsystem and started tasks resource reports.

When you select **RE.J**, the panel that is shown in [Figure 126 on page 110](#) is displayed.

Menu	Options	Info	Commands	Setup	Startpanel

zSecure Suite - Resource - JES					
Option ==>					

D	Devices	Devices			
J	Jobclass	Job class definition			
N	NJE nodes	Network job entry node protection			
R	Remotes	Remote terminals			
S	STC	Started task protection			

Figure 126. JES Resource panel

Enter **D** to open the JES Devices selection panel. This panel allows selection on most JES Device attributes.

Enter **J** to open the JES2 Job Class parameters panel. This panel shows the JES2 Job Class Attribute Table with audit concerns derived from this table and combined with relevant ACF2 levels and settings. This display matches the **JOBCLASS** display in **AU.S** category MVS tables.

Enter **N** to open the NJE_NODE summary panel. This panel shows the overview fields that you selected. (This is predefined CARLa script CKADQJN.)

Enter **R** to open the JES remote terminals selection panel. This panel allows selection on JES remote terminal attributes.

Enter **S** to open the Started task overview panel. This panel shows the authority and the protection of started tasks. This display matches the **STCPROT** report in **AU.S** category RACF resource.

For a print format version of the RE.J.J and RE.J.S reports, go to **AU.S**.

Cryptographic key information (RE.K)

Use the **RE.K** option on the Main menu to select and display Cryptographic key information.

When you select **RE.K**, the panel that is shown in [Figure 127 on page 111](#) is displayed.

Menu	Options	Info	Commands	Setup	Startpanel

zSecure Admin+Audit for RACF - Resource - Keys					

Option ==>					

C	CF structures	Coupling facility structures			
D	Data sets	Data sets under encryption policy or encrypted			
P	Public	Public key data set (ICSF PKDS)			
S	Symmetric	Symmetric keys (pervasive encryption and ICSF CKDS)			
T	Tokens	Work with PKCS11 tokens (ICSF TKDS)			

Figure 127. Cryptographic key resource panel

Note: The **Data sets** report is not available in zSecure Admin.

Coupling facility structure encryption

RE.K.C shows the coupling facility structures in the active policy as defined in the Coupling Facility Resource Manager (CFRM) data set. It also shows the current status of those structures in the coupling facility, including the encryption requirement and the creation date of the encryption key. If the active policy states that encryption is required, coupling facility structures are encrypted when the structure is allocated. When the encryption requirement is changed in the administrative policy, the updated policy must be started, and the structure must be reallocated. The detail information that **RE.K.C** reports includes pending changes for encryption status and the encryption key.

Data sets under encryption policy or encrypted

RE.K.D shows what data sets are encrypted, which of those can actually be decrypted on which system, and what data sets are affected by an encryption policy. An encryption policy is set by a DATASET profile DFP segment that has a DATAKEY field filled in. If the data set is eligible for encryption, it is encrypted once when it is (re)written. The **RE.K.D** report compares the actual key label with the policy key label.

Public key data set (ICSF PKDS)

RE.K.P shows the public key definitions in ICSF. To ease key synchronization, multiple key data sets might share the same RSA Master Key Verification Pattern (MKVP). MKVP summarizes the key definitions. The next summary levels are the physical key data set and the individual system. The record overview level shows the public key label with a large number of properties (scroll the panel to the right), including key type, archival status, the main key algorithm and key length, dates (creation, last change, last reference, start, end), and RACF protection of the key label.

Symmetric keys (pervasive encryption and ICSF CKDS)

RE.K.S shows the symmetric key definitions in ICSF as well as references to symmetric key labels, defined or not, from various sources, as seen from a specific system. To ease key synchronization, multiple key data sets might share the same AES Master Key Verification Pattern (MKVP). MKVP summarizes the key definitions. The next summary levels are the physical key data set and the individual system. The record overview level shows the public key label with a large number of properties (scroll the panel to the right), including key type, archival status, the number of references from RACF (column ESMdk), from SMS data classes (SMS), and actual data sets (Datasets), the main key algorithm and key length, dates (creation, last change, last reference, start, end), and RACF protection of the key label.

Work with PKCS11 tokens (ICSF TKDS)

See "RA.5.7 Tokens - Work with tokens" in section ["Working with certificates, key rings, filters, and tokens"](#) on page 28.

IMS region and resource reports

Use the **RE.M** option on the Main menu to select and display IMS region, transaction, and program data. The report data is obtained from a CKFREEZE data set created by running zSecure Collect APF-authorized.

When you select **RE.M**, the IMS Resource panel that is shown in [Figure 128 on page 112](#) is displayed.

The **T** and **P** options are features that are provided by the zSecure Audit products.

Menu	Options	Info	Commands	Setup	Startpanel

zSecure Suite - Resource - IMS					
Option ==> -----					
R	Regions	IMS control region reports			
T	Transactions	IMS transactions reports			
P	PSBs	IMS program specification blocks			

Figure 128. IMS Resource panel

IMS region reports

Select the **R** menu option to specify selection criteria to limit IMS region configuration data.

In the IMS Resource panel in [Figure 128 on page 112](#), select the **R** menu option to display the IMS Regions selection panel in [Figure 129 on page 112](#).

Use this panel to enter selection criteria in one or more fields to limit the IMS region configuration data. When you specify selection criteria, the output includes only those records that match all the selection criteria. Filters can be used in some of the selection fields. To find out whether a field supports filters, use the field-sensitive help function (F1).

You can also select output and run options in the IMS Regions selection panel. Additionally, you can select no options and report data is processed as soon as you press Enter. The overview panel that is displayed shows a summary of the IMS region records that match your selection criteria.

Menu	Options	Info	Commands	Setup

zSecure Suite - IMS - Regions				
Command ==> -----				
Show IMS control regions that fit all of the following criteria:				
Jobname	-----	(jobname or filter)	
VTAM applid	-----	(applid or filter)	
IMSID	-----	(identifier or filter)	
Complex	-----	(complex or filter)	
System	----	(system or filter)	
Advanced selection criteria				
_ Region security settings				
Output/run options				
_ Show differences				
_ Print format		Customize title	Send as e-mail	
_ Background run		Full page form		

Figure 129. IMS Regions selection panel

For detailed information, see the *IBM Security zSecure Admin and Audit for RACF: User Reference Manual* and the online help.

IMS transaction reports

In the IMS Resource panel in [Figure 128 on page 112](#), select the **T** menu option to display the IMS Transaction selection panel that is shown in [Figure 130 on page 113](#).

Use this panel to enter selection criteria in one or more fields to limit IMS transaction data. When you specify selection criteria, only those records that match all criteria are included in the output. Filters can be used in some of the selection fields. To find out whether a field supports filters, use the field-sensitive help function (F1).

To create a simulate report, use the report type option **Simulate access for specified resource**.

You can also select output and run options on the IMS transaction selection panel. Additionally, you can select no options and report data is processed as soon as you press Enter. The overview panel that is displayed shows a summary of IMS transaction records that match your selection criteria.

Menu	Options	Info	Commands	Setup
zSecure Suite - IMS - Transactions				
Command ==>				
Show IMS transactions that fit all of the following criteria:				
Transaction	_____			(transaction or filter)
Transaction class . . .	_____			(class number or filter)
Program specif. block	_____			(PSB or filter)
Jobname	_____			(jobname or filter)
VTAM applid	_____			(applid or filter)
IMSID	_____			(identifier or filter)
Complex	_____			(complex or filter)
System	_____			(system or filter)
Type of report	1			1. Show resource definitions 2. Simulate access for specified resource
Advanced transaction selection criteria				
_ Security settings				
Output/run options				
0	0. No summary	1. Summarize by region	2. Summarize by transaction	
_ Show differences				
_ Print format		Customize title	Send as e-mail	
_ Background run		/ Full page form		

Figure 130. IMS Transactions selection panel

For detailed information, see the *zSecure Admin and Audit for RACF User Reference Manual* and the online help.

IMS PSB reports

In the IMS Resource panel in [Figure 128 on page 112](#), select the **P** menu option to display the IMS PSB selection panel in [Figure 131 on page 114](#).

Use this panel to enter selection criteria in one or more fields to limit IMS program specification block data. When you specify selection criteria, only those records that match all criteria are included in the output. Filters can be used in some of the selection fields. To find out whether a field supports filters, use the field-sensitive help function (F1).

To create a simulate report, use the report type option **Simulate access for specified resource**.

You can also select output and run options on the IMS PSB selection panel. Additionally, you can select no options and report data is processed as soon as you press Enter. The overview panel that is displayed shows a summary of IMS PSB records that match your selection criteria.

Menu	Options	Info	Commands	Setup

zSecure Suite - IMS - PSBs				
Command ==> -----				
Show IMS PSBs that fit all of the following criteria:				
Program specif. block	-----	(PSB or filter)		
Jobname	-----	(jobname or filter)		
VTAM applid	-----	(applid or filter)		
IMSID	-----	(identifier or filter)		
Complex	-----	(complex or filter)		
System	-----	(system or filter)		
Type of report	1	1. Show resource definitions		
		2. Simulate access for specified resource		
Advanced PSB selection criteria				
_ Security settings				
Output/run options				
0	0. No summary	1. Summarize by region	2. Summarize by transaction	
_ Show differences				
_ Print format		Customize title	Send as e-mail	
_ Background run		/ Full page form		

Figure 131. IMS PSB selection panel

For detailed information, see the *IBM Security zSecure Admin and Audit for RACF: User Reference Manual* and the online help.

VTAM application reports

Use the **RE VTAM reports** option to select and display VTAM settings. On the Main menu, select **RE.N.A** to display the [Figure 132 on page 114](#) panel.

Menu	Options	Info	Commands	Setup

zSecure Suite - VTAM - Applications				
Command ==> -----				
Show VTAM applications that fit all of the following criteria:				
Logical Unit name	-----	(name or filter)		
ACB name	-----	(name or filter)		
Current state	-----	(code like ACTIV, CONCT, etc, or hex value)		
Conv.lvl.security	_	1. ALREADYV 2. PERSISTV 3. CONV 4. AVPV 5. NONE		
Complex	-----	(complex or filter)		
System	-----	(system or filter)		
SAF resource name	-----			
Advanced selection criteria				
_ RACF settings				
Output/run options				
_ 1. Summary by system		2. Summary by major node	3. Summary by jobname	
_ Show differences				
_ Print format		_ Customize title	_ Send as e-mail	
_ Background run		_ Full page form		

Figure 132. VTAM Applications selection panel

Use this panel to enter your selection criteria in one or more fields to limit the data. To see detailed field information, press **F1** on any field. This field-sensitive help function also describes which fields on the selection panels support filters. You can also find descriptions of the field names in "SELECT/LIST Fields" in *IBM Security zSecureCARLa Command Reference*.

You can select output and run options or select no options. Report data is processed as soon as you press **Enter**. The overview panel that is displayed shows a summary of the VTAM application records that match your selection criteria.

For detailed information, see the online help and the *IBM Security zSecure Admin and Audit for RACF: User Reference Manual*.

A sample overview display panel for the VTAM application display report is shown in [Figure 133 on page 115](#).

```

VTAM application display
Command ==>
All VTAM application records
-----
1 May 2014 23:42
Line 462 of 465
Scroll==> CSR
LName ACBname Major System CurSt DesSt VerifyLU Pre Acq CPa PPO SPO
-- TS00149 TS00049 A01MVS IP01 CONCT CONCT NONE CPa
-- TS00150 TS00050 A01MVS IP01 CONCT CONCT NONE CPa
-- TVT5004 TVT5004 VTAMSEG IP01 ACTIV ACTIV NONE Acq
-- WUINCM01 WUINCM01 A01CICS IP01 CONCT CONCT NONE Acq CPa
***** Bottom of Data *****

```

Figure 133. VTAM application detail display

The data for this report is available only if a CKFREEZE file is created during an APF-authorized run of zSecure Collect (the CKFCOLL program). For details about creating a CKFREEZE file, see "zSecure Collect for z/OS" in *IBM Security zSecure Admin and Audit for RACF: User Reference Manual*.

z/OS settings

Use the **RE.O** option on the Main menu to select and display the z/OS settings.

When you select **RE.O**, the panel that is shown in [Figure 134 on page 115](#) is displayed.

```

Menu      Options      Info      Commands      Setup      Startpanel
-----
Option ==>
-----
zSecure Admin+Audit for RACF - Resource - z/OS
-----
A  Address space  Active address spaces and their DD name allocations
C  Common stg    Common storage protection
D  DMS           CA-Disk (DMS) systemwide security settings
I  IPL           IPL parameters
L  Logging       SMF recording options and exits per SMF subsystem
M  MPF           Message processing facility intercepts
O  Consoles     Operator console authority and protection
R  Ranges       Virtual storage ranges
T  Tape         System-level tape protection settings
S  System       System-level z/OS security settings (not ESM specific)
V  Variables    System variables

```

Figure 134. z/OS settings resource panel

Note: In zSecure Admin, only the System (**RE.O.S**) report is available.

Type **A** in the Option prompt to see the Active address spaces and their DD name allocations. (This is predefined CARLa script CKADQES.)

The **C** option opens the Globally Writable Common Storage panel that shows the common storage map for areas worth auditing. It is the same as the **WRITABLE** report in **AU.S** category MVS tables.

The **D** options shows the DMS and DMSAUDIT reports. It is the same as the **DMS** and the **DMSAUDIT** reports in **AU.S**.

When you select the **I** option, the Effective system IPL parameter report opens. It matches the **IPLPARM** display in **AU.S** category MVS tables.

The **L** option opens the SMF subsystem-dependent settings panel that shows the shows SMF subsystem settings. This report corresponds to the **SMFSUBOP** report in **AU.S** category MVS tables.

Use the **M** option to see the Message Processing Facility message intercepts report. It is the same as the **MPFMSG** report in **AU.S** category MVS tables and displays the message identifiers that receive special handling by MPF category.

To see the operator consoles, select the **O** option. This report is the same as the **CONSOLE** report in **AU.S** category MVS tables.

The **R** option opens the Virtual storage map and corresponds to the VSM report in **AU.S** category MVS tables.

Use the **T** option to display the Tape protection settings. It is the same as the **TAPE** report in **AU.S** category MVS tables.

The **S** option displays the non-security system settings. It is the same as the **SYSTEM** and the **SYSTEMAU** reports in **AU.S** category MVS tables.

The **V** option is only available in the **RE.O** menu and opens the **SYSTEM_VARIABLE** summary report that displays MVS system variables. The first display level is a summary on the variable name and shows on how many systems the variable occurs. Zoom in to see the individual values per system. (This is predefined CARLa script CKADQMV.)

For print format version of the reports, go to **AU.S**.

Executable programs reports

When you select **RE.P**, the panel that is shown in [Figure 135 on page 116](#) is displayed.

Menu	Options	Info	Commands	Setup	Startpanel

zSecure Admin+Audit for RACF - Resource - Programs					
Option ==>					

A	Appendages	I/O appendages			
C	PC	Program Call routines			
D	Dynexit	Dynamic exit routines			
E	Exits	Exit routines			
P	Programs	Program objects and load modules			
S	Subsys	Sybsystem definitions and function routines			
T	PPT	Program property table (system key / bypass DS security)			
V	SVC	Supervisor calls			

Figure 135. Executable programs resource panel

Most displays are the same as under **AU.S**.

The **A** option shows the Authorized I/O appendages as they were defined in the in-storage table. This display is the same as the **IOAPPD** display in **AU.S** category MVS tables.

The **C** option opens the Program Call Audit Display that shows the Program Call definitions and the routines called. It is based on the definitions in the PC/AUTH address space. Its corresponding display in **AU.S** category MVS tables is **PC**.

To see the Dynamic exit definitions, enter the **D** option. It is the same as the **DYNEXITS** display in **AU.S** category MVS extended (which is part of option EXITS). The **E** option opens the Exit and table overview report that displays TSO, RACF, ACF2, JES2, WTO, MPF, CA-1, DMS, HSM, and SMF exits and tables, as well as the dynamic exit definitions. Its corresponding display in **AU.S** is **EXITS**.

The **P** option opens the Module protection overview that shows the protection of load modules that have the potential to circumvent RACF. In **RE.P**, the **P** option also shows APF AC=0 modules, while **AU.S** category RACF resource only shows AC=1.

The **S** option opens the Subsystem Communication Vector Tables shows the subsystems as they are represented in storage, one SSCT per subsystem. It's corresponding display in **AU.S** category MVS tables is **SUBSYS**.

The **T** option opens the Program Property Table that displays the effective Program Property Table entries. It is the same as the **PPT** display in **AU.S** category MVS tables.

The **V** option opens the Supervisor Call Audit Display that shows the Supervisor Call Table, along with its expected contents and possibly two previous versions from the update table. It also includes Extended Service Router (ESR) data. It is the same as the **SVC** display in **AU.S** category MVS tables.

For a print version of the reports, go to **AU.S**.

MQ region and resource reports

Use the **RE.Q** option on the Main menu to select and display MQ region and resource data.

The MQ Resource panel shown in [Figure 136 on page 117](#) is displayed when you select the **RE.Q** option.

Menu	Options	Info	Commands	Setup	Startpanel

zSecure Suite - Resource - MQ					
Option ==>					
R	Regions	MQ region level settings (MxADMIN)			
AI	Auth info	Authentication information objects			
CA	Channel auth	Channel authentication records			
CH	Channels	Channel definitions			
CN	Connections	Applications connected to Queue Manager			
IN	Initiators	Channel initiator overview and settings			
NL	Namelists	Lists of names			
PR	Processes	Process definitions and settings			
QU	Queues	Queue definitions and settings			
TO	Topics	Topics for Publish/Subscribe usage			

Figure 136. MQ Resource menu

Note: In zSecure Admin, only the Regions report is available.

MQ region reports

Select the **R** menu option to specify selection criteria to limit MQ region configuration data.

In theMQ Resource panel in [Figure 136 on page 117](#), select the **R** menu option to display the MQ Regions selection panel in [Figure 137 on page 117](#).

Menu	Options	Info	Commands	Setup

zSecure Suite - MQ - Regions				
Command ==> -----				
Show MQ regions that fit all of the following criteria:				
Jobname	-----	(jobname or filter)	
Region userid	-----	(userid or filter)	
MQ QMGR name/subsystem	----		(name or filter)	
Complex	-----	(complex or filter)	
System	----	(system or filter)	
Output/run options				
-	Show differences			
-	Print format	Customize title	Send as e-mail	
-	Background run	Full page form		

Figure 137. MQ Regions selection panel

Use this panel to enter selection criteria in one or more fields to limit the MQ region configuration data. When you specify selection criteria, the output includes only those records that match all the selection criteria. You can use filters in some of the selection fields. To find out whether a field supports filters, use the field-sensitive help function (F1).

You can also select output and run options in the MQ Regions selection panel, or select no options, and report data is processed as soon as you press Enter. The overview panel that is displayed shows a summary of the MQ region records that match your selection criteria.

For detailed information, see the online help and the *IBM Security zSecure Admin and Audit for RACF: User Reference Manual*.

MQ resource reports

You can select the menu option of your choice to limit source data in MQ resource reports.

On the MQ Resource panel shown in “MQ region and resource reports” on page 117, select the menu option of your choice. The corresponding selection panel is then displayed. For example, for MQ Queues:

Menu	Options	Info	Commands	Setup

zSecure Suite - MQ - Queues				
Command ==> -----				
Show MQ queues that fit all of the following criteria:				
Queue name	-----	1. Alias	2. Local	3. Model
Queue type	-----	4. Remote		
MQ QMGR name/subsystem	-----	(name or filter)		
Complex	-----	(complex or filter)		
System	-----	(system or filter)		
SAF resource name . . .	-----			

Advanced selection criteria				
- RACF settings		- Further selection		
Output/run options				
- 0. No summary		1. Summary by region	2. Summary by queue	
- Show differences		- Specify scope		
- Print format		- Customize title	- Send as e-mail	
- Background run		- Full page form		

Figure 138. MQ Queues selection panel

Use this panel to enter your selection criteria in one or more fields to limit the data. To see detailed field information, press **F1** on any field. This field-sensitive help function also describes which fields on the selection panels support filters. You can also find descriptions of the field names in "SELECT/LIST Fields" in *IBM Security zSecureCARLa Command Reference*.

When you specify selection criteria, the output includes only those records that match all the selection criteria. Some selection panels include advanced selection criteria:

RACF settings

When you select **RACF settings**, a RACF settings selection panel is displayed. For example, for MQ Queues:

Menu	Options	Info	Commands	Setup

zSecure Suite - MQ - Namelists				
Command ==> -----				
Show MQ namelist records that				
Profile exists (Y/N)	-----			
Universal access . . . --		1. None	3. Update	5. Alter
		2. Read	4. Control	
ID * access --		1. None	3. Update	5. Alter
		2. Read	4. Control	
Warn only (not protect)	----- (Y/N)			
Effective audit settings:				
S/F		Read	Update	Control
AND	Success audit access . . --			Alter
	Failure audit access . . --			None

Figure 139. MQ Queues SAF selection panel

Further selection

When you select Further selection, a further selection panel is displayed. For example, for MQ Channel:

Menu	Options	Info	Commands	Setup
zSecure Suite - MQ - Channels				
Command ==> _____				
Show MQ channels that fit all of the following criteria:				
Transmit queue name _____				
Userid for channel . . _____ (userid or filter)				
Alter date ____ (operator+yyyy-mm-dd)				
Select flag fields (Y/N/blank)				
OR (AND or OR relationship)				
_ Password set for channel _____ SSL Client auth required				

Figure 140. MQ Channels Further selection panel

You can select output and run options or select no options. Report data is processed as soon as you press **Enter**. The overview panel that is then displayed shows a summary of the records that match your selection criteria. For example, for MQ Connections:

MQ connections display				Line 1 of 1
Command ==> _____				Scroll==> CSR
All MQ connection records				23 Jun 2014 14:23
Connect identification		ExtConn in C_ID		Complex M
__ C3E2D8C3D8F7C7F140404040404040CD57AD5515600001		CSQCQ7G1		PLEX1 Q
***** Bottom of Data *****				

Figure 141. MQ connections display

This data can only be listed if a CKFREEZE file is created during an APF-authorized run of zSecure Collect (the CKFCOLL program). For information about creating such a CKFREEZE file, see "zSecure Collect for z/OS" in *IBM Security zSecure Admin and Audit for RACF: User Reference Manual*.

On this overview display panel, you can use action commands. For example:

- R** Shows region information.
- S** Shows additional information

For detailed information on resource reports and complete lists of available action command for each report type, see the online help (F1) and "Resource reports for z/OS" in *IBM Security zSecure Admin and Audit for RACF: User Reference Manual*.

Trust relations reports

Select the **RE.T** option to specify selection criteria for trust relations and to limit record output.

Use the **RE.T** option on the Main menu to select and display trust relations.

When you select **RE.T**, the Trusted panel shown in [Figure 142 on page 120](#) is displayed.

Use the panel to enter selection criteria for trust relations and to limit record output. You can enter selection criteria in one or more fields. The output includes only those records that match all of the selection criteria. If the selection panel is left blank, all records are selected. Filters can be used in some selection fields. To find out if a field supports filters, use the field-sensitive help function (PF1).

You can also select output and run options in the trusted relations selection panel, or select no options and report data is processed as soon as you press Enter. The overview panel that is displayed shows a summary of the trust relations records that match your selection criteria.

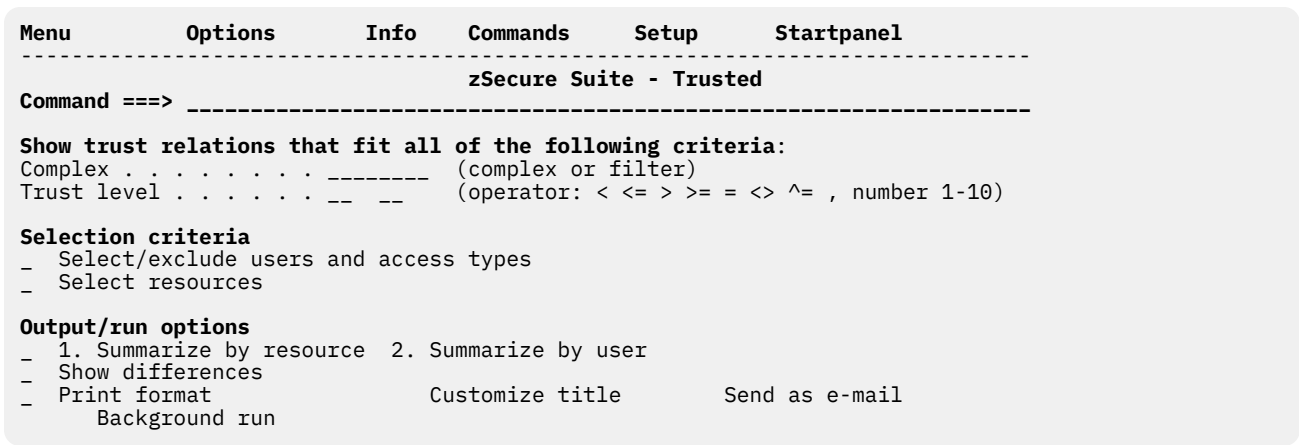


Figure 142. Trusted panel

For detailed information, see the *IBM Security zSecure Admin and Audit for RACF: User Reference Manual* and the online help.

UNIX file system reports

When you select option **RE.U**, the Resource - UNIX panel that is shown in [Figure 143 on page 120](#) opens.

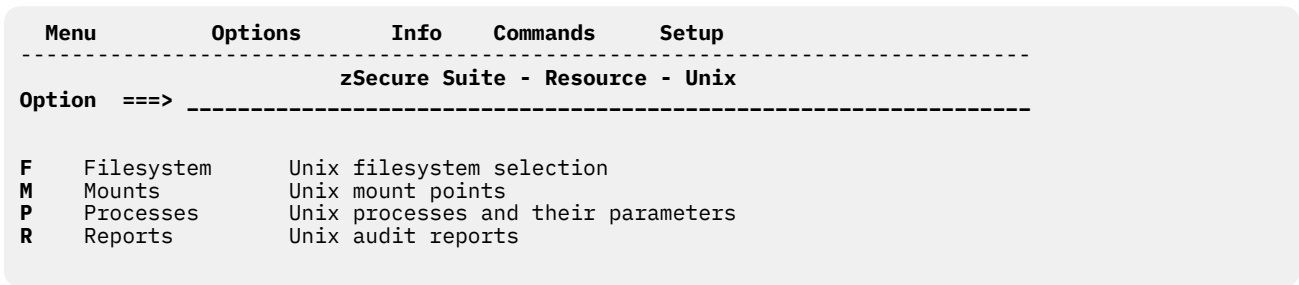


Figure 143. Resource UNIX menu

Note: The **Processes** report is not available in zSecure Admin.

File system - UNIX file system reports

Use this option to select and display UNIX file system records. A full CKFREEZE data set read is required, and the CKFREEZE data set must be made with the `UNIX=Y` parameter. If the zSecure Collect run was APF-authorized, more information is displayed.

When you select option **F**, the Resource - UNIX Selection panel that is shown in [Figure 144 on page 121](#) opens.

Menu	Options	Info	Commands	Setup
zSecure Suite - Resource - Unix Selection				
Command ==> _____ start panel				
Show Unix files that fit all of the following criteria:				
Path name . _____				
_____ (name or filter) 2 1. Resolve symlinks				
_____ 2. EGN mask				
File name . _____ (name or filter)				
Complex . . _____ (complex or filter)				
Advanced selection criteria				
_ File attributes _ File system _ File ACL				
Output/run options				
_ Show differences				
_ Summary on sensitivity				
_ Output in print format _ Customize title _ Send as e-mail				
_ Run in background				

Figure 144. Resource UNIX selection panel

If the selection panel is left blank, all UNIX files are selected. You can limit the UNIX files that are selected by completing one or more fields to be used as selection criteria. Only records that match all criteria are selected. Filters can be used in some of the selection fields. You can select one of the Advanced selection criteria to specify filters to select and display UNIX files. When you select a criterion, a panel opens where you can specify the attributes in which you are interested.

Use the **Output/Run** options to customize settings to run the report and generate output. The settings that you specify are saved in your ISPF profile and become the default settings for all UNIX panels that provide the option.

For detailed information, see the *IBM Security zSecure Admin and Audit for RACF: User Reference Manual* and the online help.

After you process the CKFREEZE file by using the specified selection criteria, the UNIX summary panel opens to display the results as shown in [Figure 145 on page 121](#).

IBM Security zSecure UNIX summary				Line 1 of 26
Command ==> _____				Scroll==> CSR_
All Unix files				28 Aug 2008 00:07
Complex	System	Count		
EEND	EEND	70562		
Count	FS	mount	point	
-- 24	/			
-- 2	/home			
-- 2	/home/cimbhg1			
-- 205	/u			
-- 5	/u/automount			
-- 1713	/u/automount/c2eaudit			
-- 3105	/u/automount/c2rnew			
-- 446	/u/automount/smpe			
-- 730	/u/automount/smpe/smpnts/STP82890/SMPPTFIN			
-- 1434	/u/automount/C2RSRV#P			
-- 283	/u/automount/C2RSRV#P/PZ00350			
-- 1	/u/automount2			
-- 1	/u/zosmapper			
-- 11	/EEND			

Figure 145. UNIX summary display

Selecting any of the mount points listed in the summary panel that is shown in [Figure 145 on page 121](#) displays its list of UNIX files as shown in [Figure 146 on page 122](#).

```

IBM Security zSecure UNIX summary                                     Line 1 of 446
Command ==> ----- Scroll==> CSR_
All Unix files                                                    28 Aug 2008 00:07
  Complex System Count
  EEND      EEND      70562
  Count FS mount point
    446 /u/automount/supe
  T FileMode +  apsl AuF Owner  Group  Relative pathname (within FS)
--- d rwx-----   fff CRMBHJ1 ZSECU  .
--- d rwx-----   fff CRMBHJ1 LDAP   smpnts
--- l rwx-----   fff CRMBHJ1 LDAP   smpnts/zos19jpn
--- d rwx-----   fff CRMBHJ1 LDAP   smpnts/STP82890
--- - rwx-----  --s- fff CRMBHJ1 LDAP   smpnts/STP82890/GIMPAF.XML
--- - rwx-----  --s- fff CRMBHJ1 LDAP   smpnts/STP82890/GIMPAF.XSL
--- d rwx-----   fff CRMBHJ1 LDAP   smpnts/STP82890/SMPHOLD
--- - rwx-----  --s- fff CRMBHJ1 LDAP   smpnts/STP82890/SMPHOLD/S0004.ESMCP
--- d rwx-----   fff CRMBHJ1 ZSECU  smpnts/STP82890/SMPPTFIN
--- d rwx-----   fff CRMBHJ1 LDAP   smpnts/STP82890/SMPRELF
--- - rwx-----  --s- fff CRMBHJ1 LDAP   smpnts/STP82890/SMPRELF/CPPCACHE.IB
--- - rwx-----  --s- fff CRMBHJ1 LDAP   smpnts/STP82890/SMPRELF/CPPCACHE.IB
--- - rwx-----  --s- fff CRMBHJ1 LDAP   smpnts/STP82890/SMPRELF/CPPCACHE.IB
--- - rwx-----  --s- fff CRMBHJ1 LDAP   smpnts/STP82890/SMPRELF/CPPCACHE.IB
--- - rwx-----  --s- fff CRMBHJ1 LDAP   smpnts/STP82890/SMPRELF/CPPCACHE.IB
--- - rwx-----  --s- fff CRMBHJ1 LDAP   smpnts/STP82890/SMPRELF/CPPCACHE.IB

```

Figure 146. UNIX summary panel - UNIX file list for selected mount point

You can perform the following actions from this panel:

- To browse the regular files, type B in the selection field for a file or directory entry.
- To call the UNIX System Services ISPF Shell for a file or directory, type I in the selection field for that file or directory.
- To start the z/OS UNIX Directory List Utility for a directory, type U in the selection field for the directory.

When you select to view a file from the panel that is shown in Figure 146 on page 122), the panel that is shown in Figure 147 on page 123 opens. To view the contents of a file in this panel, type S in front of the **Absolute pathname** field.

System view of file

```

Complex name          EEND
Sysplex name         NLDLPPLX
System name          EEND
- Absolute pathname   /u/automount/smpe/smpnts/STP82890/GIMPAF.XML
FS mounted with SECURITY Yes
FS mounted with SETUID No
FS mounted READ/WRITE Yes
Stickysug property profile
File access attributes go=,u=rw
Security label
Extended file attributes +s -apl
Effective audit flags    =f
- Owner name          CRMBHJ1 CRMQA097 HZSUSER LDAPSRV OMVS RCCSL01
- Owner name          SKRBKDC STRCONS STRTASK TCPSRV
- Group name          LDAP SMPE
Home Directory for Users
Device              1648
Relative audit priority
Audit concern

```

Physical file attributes

```

Complex that owns file system EEND
System that owns file system EEND
File system data set name     CRMBOMVS.U.SMPE.HFS
Volume serial for file system SMPNTS
File system DASD serial + id  IBM-68-000000065892-0062
Relative pathname within FS   smpnts/STP82890/GIMPAF.XML
File type                    -
Physical access attributes    o=,u=rw,g=r
Physical access attr parent   a=rx
Physical extended attributes  +s -apl
User-requested audit flags    =f
Auditor-specified audit flags =
User id                      0
Group id                     3
Inode number                  98
File audit id                 01E2D4D7D5E3E2000F05000000620000
Number of hard links          1
Link target

```

User	TOrwx	ACL id	UID/GID	Name	InstData
CRMBHJ1	urw-	CRMBHJ1	0	JOHN FRANK	
CRMQA097	urw-	CRMQA097	0	TEST QUOTED FORMAT	OMVS HOME TO TEST \$QU
HZSUSER	urw-	HZSUSER	0		Z/OS HEALTH CHECKER
LDAPSRV	urw-	LDAPSRV	0	LDAP SERVER USER	
OMVS	urw-	OMVS	0		
RCCSL01	urw-	RCCSL01	0	JOHN SMEDLINE SPEC.	
SKRBKDC	urw-	SKRBKDC	0	KERBEROS STARTEDTASK	NETW AUTH KERBEROS
STRCONS	urw-	STRCONS	0	STC VOOR TSO CONSOLE	
STRTASK	urw-	STRTASK	0	DIV STARTED TASK USR	
TCPSRV	urw-	TCPSRV	0	TCPIP STARTED TASK	
-group-	gr--	LDAP	3		
-group-	gr--	SMPE	3		
- any -	o---	-other-	n/a		

***** Bottom of Data *****

Figure 147. UNIX detail display

For more detailed information about these reports, see the *IBM Security zSecure Admin and Audit for RACF: User Reference Manual* and the online help.

Mounts - Unix mount points reports

When you select option **M**, the Effective UNIX mount points panel opens. This display shows the effective mount points with their characteristics. This report matches the **MOUNT** report in **AU.S** category MVS extended.

Processes - Unix processes and their parameters

When you select option **P**, the UNIX_PS summary panel opens. It displays the name of the job, the ID of the Unix process, and the full path name of the main UNIX program. The **P** option shows the processes that are active at snapshot time.

Reports - running the predefined UNIX audit reports

Use the **Reports** option to generate any of the predefined UNIX audit reports available in zSecure. When you select this option, a panel opens with a list of reports for selection. See [Figure 148 on page 124](#). For details about a specific report, position the cursor on the report selection field and press F1 to view the online help.

```
zSecure Suite Display Selection                      3 s elapsed, 0.8 s CPU
Command ==>_____ Scroll==> PAGE

  Name      Summary Records Title
- MOUNT          0          0 Effective UNIX mount points
- UNIXAPF         0          0 UNIX files with APF authorization
- UNIXCTL         0          0 UNIX files that are program controlled (daemons etc)
- UNIXSUID        0          0 UNIX files with SETUID authorization
- UNIXSGID        0          0 UNIX files with SETGID authorization
- GLBWUNIX        0          0 UNIX files vulnerable to trojan horse & back door at
- UIDNOUSR        0          0 UIDs not defined in the complex
- GIDNOGRP        0          0 GIDs not defined in the complex
- SHRDUIDS        1        196 OMVS UIDs shared between RACF users
- OMVSNUID        1         21 RACF users with OMVS segment but no UID
- SHRDGIDS        1         42 OMVS GIDs shared between RACF groups
- OMVSNPID        1          2 RACF groups with OMVS segment but no GID
***** Bottom of Data *****
```

Figure 148. UNIX Reports listing

Chapter 12. CARLa queries

zSecure Admin and Audit for RACF ISPF panels generate queries that are sent to the products for execution. These queries are in the CARLa Auditing and Reporting Language (CARLa), a useful tool for systems programmers.

The query-generation process is not apparent to interactive users, but becomes important if you want to use product functions in batch mode. In general, the same CARLa query options can be used in either interactive mode or in batch mode. For example, you can use one of the primary options, **CO.C** (CARLa options) to specify CARLa queries directly.

Tip: Instead of typing =CO.C, you can also type the primary command CARLA at the command prompt on a panel to specify CARLa queries.

Many CARLa samples are provided with the products. When you have time, browse them at random and run the code samples that are interesting to you. You can also look at the CKA\$INDX index member, which contains a list and brief description of all members in the CARLa library. You can also browse the SCKRCARL library, which contains interactive ISPF and batch reports that you can use or tailor for your own needs. For more detailed information about CARLa and the SCKRCARL library, see the *zSecure Admin and Audit for RACF User Reference Manual*.

Tip: To browse the SCKRCARL library, you can use the following steps: [“Browsing the SCKRCARL library”](#) on page 126

In addition to the manuals, IBM offers the following information:

- CARLa programming and customer enablement courses for frequent users of zSecure Admin and zSecure Audit for RACF. There is also a zSecure Customer Forum on developerWorks® at <http://www.ibm.com/developerworks/forums/forum.jspa?forumID=1255>
- *Hands-on exercises for understanding the basics of the zSecure CARLa Auditing and Reporting Language* on developerWorks®; search developerWorks® for zSecure CARLa training at <http://www.ibm.com/developerworks/wikis/display/tivolidoccentral/Home>
- For links to this forum and other resources, see the **More Information** tab in the zSecure IBM Knowledge Center at www.ibm.com/support/knowledgecenter/SS2RWS_2.5.0/com.ibm.zsecure.doc_2.5.0/welcome.html

You can use CARLa to define and format custom reports. Use any fields that are known to RACF and SMF, with headings and line formats that are specified by you. Typical use involves identifying a pre-built display or report that is almost what you need. You can also use CARLa to capture and save the CARLa used to generate the Display/Report from the Results panel. You can modify it to produce exactly what you need. zSecure Admin and Audit for RACF provides a whole library of sample CARLa material, the SCKRCARL library. You can add new members to this library, or create your own library. Do not alter the existing members of the library because the interactive functions of the products use these members.

To run one of the members of the SCKRCARL library, complete the following steps: [“Running a member of the SCKRCARL library”](#) on page 126

To customize the CARLa program, complete the following steps: [“Customizing the CARLa program”](#) on page 127

To create a sample CARLa program, complete the following steps: [“Creating a sample CARLa program”](#) on page 128

To save your CARLa program for later use, you can copy it into your own private data set.

To copy your program, type the command C9999 over the line number field of the first CARLa line. Then, enter CREATE in the command area. You now use the normal ISPF Edit function to create (or replace) members in a PDS.

Whenever you want to rerun your saved CARLa program, complete the following steps: [“Running a saved CARLa program”](#) on page 129

Browsing the SCKRCARL library

You can browse the SCKRCARL library to view interactive ISPF and batch reports. Use and tailor these reports according to the needs of your organization.

Procedure

1. Issue the TSO ISRDDN command from within the product under ISPF.
2. Type F SCKRCARL to look for the active SCKRCARL library.
3. Use the **B**(Browse) function to open the SCKRCARL library.

The CKA\$INDX member at the top lists the available members and their functions.

Running a member of the SCKRCARL library

Use this task to view, edit, and run members from the SCKRCARL command library.

About this task

In ISPF, you can view, edit, and run members from the current SCKRCARL command library. It is accessed through the DD-name CKRCARLA.

Procedure

1. Select option **CO** (CARLa options) from the Main menu. Press Enter to open the panel that is shown in [Figure 149 on page 126](#).

This panel is used to perform library commands.

```
Menu      Options      Info      Commands      Setup      Startpanel
-----
Option ==> zSecure Admin+Audit for RACF - CARLa options
-----
1      Libraries      Select and maintain CARLa library
2      Members        Work with members from current CARLa library
3      Edit            Edit member from current CARLa library
4      Run             Run member from current CARLa library
5      Submit          Run member from current CARLa library in background
C      Command         Type in any CARLa command
L      Last query      Work with last interactive CARLa query

Member name . . . . . (If 3, 4 or 5 selected)
Two pass query . . N (Y/N, option 4 only)

Current library . . DD:CKRCARLA
Input complex . . . Input set created 8 Apr 2005
Current mask type . EGN
```

Figure 149. CARLa options (CO) used to run library commands

2. Select option **2** (Members) and then press Enter to select a member or find the name of the member you want to execute in one of the user reference manuals.

For this example, use member CKRLMTX3.
3. If you are using the Members function, find the member name (CKRLMTX3 or the member name you chose from the reference manual) in the Member list, or type the member name in the **Member name** field in the Commands panel.
4. From the members list, issue the **E** line command in front of the member you want to use (for example, CKRLMTX3). From the Commands panel, type option **3** (Edit) and press Enter.

A panel opens showing the selected CARLa member as shown in [Figure 150 on page 127](#).

```

EDIT          CKR.SCKRCARL(CKRLMTX3) - 01.00          Columns 00001 00080
Command ==>          Scroll ==> CSR
***** Top of Data *****
=NOTE= Enter GO or RUN to execute commands, SUB or SUBMIT to generate batch job
000001 /*****BeginModule*****/
000002 * LICENSED MATERIALS - PROPERTY OF IBM
000003 * 5655-T01
000004 * Copyright IBM Corp. 1989, 2007
000005 * All Rights Reserved
000006 * US Government Users Restricted Rights - Use, duplication or
000007 * disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
000008 * File-stamp: <050621 MR 12:44:08 CKRLMTX3.SCKRCARL>
000009 * FMID: HCKR1C0 RMID: HCKR1C0 IBM Security zSecure Base 1.12.0
000010 * Purpose:
000011 *     List ACL matrix
000012 * Notes:
000013 *     Imbed this member after a selection newlist RACFSEL, e.g.:
000014 *
000015 *     n name=racfsel outlim=0
000016 *     select c=dataset s=base qual=SYS1
000017 *     sortlist qual
000018 *     i m=ckrlmtx3
000019 *
000020 * History:
000021 * 011015 1.2.0 SDG ERZ120: Created
000022 * 050621 1.7.0 MR EZ0506016: Added execute & RACFSEL
000023 *****/EndModule*****/
000024
000025 n type=racf title='Data set access matrix'
000026 def alter(aclid,8,'Alter')
000027     subselect acl(access=alter and missing(whenprof))
000028 def control(aclid,8,'Control')
000029     subselect acl(access=control and missing(whenprof))
000030 def update(aclid,8,'Update')
000031     subselect acl(access=update and missing(whenprof))
000032 def read(aclid,8,'Read')
000033     subselect acl(access=read and missing(whenprof))
000034 def exec(aclid,8,'Execute')
000035     subselect acl(access=execute and missing(whenprof))
000036 def condacc(aclaccess,1,'C')
000037     subselect acl(exists(whenprof))
000038 def hdr_o('o',1,hdr$blank) true where((key='^')) /* always FALSE */
000039 def cond(aclid,'nditional')
000040     subselect acl(exists(whenprof))
000041
000042 select c=dataset s=base likelist=racfsel
000043 sortlist key(35) uacc alter control update read exec condacc,
000044 | hdr_o | cond
***** Bottom of Data *****

```

Figure 150. Member CKRLMTX3 of the CKCARLA library

Update the data sets that contain the software only during installation and maintenance. If you need customized members, store them in a data set of your own. Use the configuration parameters **WPREFIX** or **UPREFIX** to use these data sets.

What to do next

The selected CARLa program shows a matrix of the access that is granted on one or more profiles. It needs some customization for you to select the profiles you want to be reported on. To avoid changing the original member, the procedure in [“Customizing the CARLa program” on page 127](#) shows you how to work with a temporary copy.

Customizing the CARLa program

Before you begin

Complete [“Running a member of the SCKRCARL library” on page 126](#).

Procedure

1. Issue the CANCEL command to be sure that you leave the edit session without making any accidental changes to the member.
2. Enter option 4 (Run).
Because the customization is not yet done, this option results in a syntax error about an incorrect LIKELIST.
3. Press PF3 to open the Results panel. Enter an E before the **Command** line and press Enter.
You are now editing a temporary copy of the CARLa program.
4. Customize the program.
The customization is documented in the **Notes** section of the header. This program was created to be included from other programs. To include the program, write a selection newList (lines 15 - 17), and include the program directly behind it (line 18).
You can achieve the same result by adding the selection newList to the start of the CARLa program:
5. Copy lines 15 - 17 directly after line 23. (Remove the * to uncomment them.)
6. Change the class (c=data set) and HLQ (qual=sys1) specifications to match the profiles that you want to see.
7. Type Go or Run in the **Command** line to run this program.
A report similar to the one shown in [Figure 151 on page 128](#) opens.

```
BROWSE - IBMUSER.C2R10FE.REPORT ----- LINE 0000 0.5 s CPU, RC=0
COMMAND ==>                                SCROLL ==> CSR
***** Top of Data *****
P R O F I L E   L I S T I N G    4 Apr 2005 00:50
Access matrix
```

Profile key	UACC	Alter	Control	Update	Read
SYS1.*.**	READ	SYS1 SYSPROG P390			C#MA
SYS1.*.MAN*.**	NONE	SYSPROG	STRTASK		C#MBRACF C#MARACF C#MBDSCT
SYS1.BROADCAST	NONE	SYSPROG		* C#MBWTK C#MBWT3	
SYS1.CMDLIB	READ	SYS1 SYSPROG			C#MA
SYS1.C#M.LINKLIB	READ	SYS1 SYSPROG			C#MA
SYS1.CSSLIB	READ	SYS1			C#MA

Figure 151. CARLa access matrix

What to do next

Instead of running one of the existing samples, you can program your own CARLa program. In [“Creating a sample CARLa program” on page 128](#), run a small CARLa program to see what CARLa programming can mean to you.

Creating a sample CARLa program

Before you begin

Read [“Running a member of the SCKRCARL library” on page 126](#) and [“Customizing the CARLa program” on page 127](#).

Procedure

To create a sample CARLa program, complete the following steps:

1. Select option **C0** (CARLa options) from the Main menu to open the panel that is shown in [Figure 149](#) on page 126 so that you can run library commands.
2. Select option **C** (Command) to open the PDF editor.
3. In the editor workspace, type the following CARLa statements, changing *c#mb* to some RACF group in your system that owns user IDs.

```
newlist type=racf file=ckrcmd nopage
select class=user owner=c#mb segment=base
list 'alu' key(8) 'owner(newowner)'
```

Figure 152. CARLa example program

This small CARLa program generates RACF commands to change the owner. All user profiles that are currently owned by *c#mb* are selected and the owner field is changed into *newowner*. The output (RACF commands) is written in the CKRCMD file and can be processed by the **RUN** command. See “Results panel” on page 62.

The output is similar to the output shown in [Figure 153](#) on page 129:

```
/* CKRCMD file CKR1CMD complex DEMO NJE JES2DEMO generated 27
alu C#MBHEN owner(newowner)
alu C#MBERT owner(newowner)
alu C#MBJVO owner(newowner)
```

Figure 153. CARLa example program output

Running a saved CARLa program

Before you begin

Read “Creating a sample CARLa program” on page 128.

Procedure

To run your saved CARLa program, follow these steps:

1. Type **C0** from the Main menu and press Enter.
2. Type **1** (Libraries) from the CARLa options panel and press Enter.
3. Type **I** (insert) line command in any detail line and press Enter to insert a line.
4. Type the name of your private library. Use quotation marks if necessary. Press Enter.
5. Select the library with the **S** line command and press Enter.
6. Press PF3 to return to the Commands panel.

The name of your library is displayed in the **Current library** field.

7. Type the member name of the CARLa program in the **Member name** field.
8. Select option **4** (Run).

Chapter 13. Typical administration and audit tasks

The following topics describe how to perform typical administration and audit tasks in zSecure Admin and Audit for RACF.

- [“Removing a user” on page 131](#)
- [“Displaying which data sets a user can access” on page 131](#)
- [“Load library audit” on page 131](#)
- [“Print data on display panels” on page 132](#)
- [“Find profiles based on search criteria” on page 132](#)
- [“Protect All Verify function” on page 132](#)
- [“Command function” on page 132](#)

Removing a user

About this task

If you want to remove the RACF access credentials for a user and do not know the user ID, you can use the zSecure Audit for RACF **RA.U** function. Enter a name search pattern to locate the user ID and determine which data sets the user can access. Then, you can select the user profile for removal.

Procedure

1. Enter **RA.U** in the **Command** line to open the RACF User panel.
2. In the **Programmer Name** field, type the user name or name pattern to display all user profiles that match the name somewhere in the **Programmer Name** field.
3. Press Enter to display the results
4. To remove the user from RACF, type **D** in front of the user profile and then press Enter.

Displaying which data sets a user can access

Procedure

To list all data sets that a particular user can access, use the RACF **Report Permit/Scope** function (option **RA.3.4**).

Load library audit

The **Audit Library** functions, option **AU.L** in zSecure Audit for RACF, can easily detect situations that are difficult to detect with standard z/OS or RACF tools.

These situations, in both load libraries and source libraries, include:

- Whether the load libraries are clean, especially the system and APF libraries.
- Whether a module is present multiple times, under different names and perhaps under different owner profiles.
- Whether the same module is present in more than one library.

Note: It would cause serious problems if one copy is obsolete, but is unknowingly called by some jobs due to the library search order.

Print data on display panels

Use the **PRT** command to print data while examining display output.

While you are examining the output of a Display function, you might want to print the data. Use the **PRT** command. Output goes to the ISPF LIST data set. For more complex reports, use the **RESULTS** command to review all the files that are produced by the last function. You can also print from this panel.

Find profiles based on search criteria

The **Match** function can be exceptionally useful. This function finds all profiles that cover a specified data set or sets, or general resources.

You can find this function in the following panels:

- Data set profiles: option **RA.D** data set
- General Resource profiles: option **RA.R** Resource
- RACF Report match: option **RA.3.7**

For **RA.D** and **RA.R**:

- **3 Match** treats the profile field as a resource name and selects the best profile that matches the resource name. See the **BESTMATCH** parameter in the *IBM Security zSecure Admin and Audit for RACF: User Reference Manual*.
- **4 Any match** treats the profile field as a resource name and selects all profiles that can match the resource name. See the **MATCH** parameter in the *IBM Security zSecure Admin and Audit for RACF: User Reference Manual*.

RA.3.7 works like **Any match**: The profile used by RACF is in the first line. The other profiles are used if the first profile is removed. Poor planning or administration can result in several profiles with different access lists and UACC values covering a data set.

Protect All Verify function

You might be thinking about going to a Protect All environment. Most z/OS installations do so, although there can be much work involved. Try the Verify function of Protect All. If you use SMS, HSM, or ABR, you might exclude the volume MIGRAT on the submenu of the **Protect All** function. This action can greatly reduce the number of unwanted messages. Especially in a RACF environment without **PROTECT ALL**, this **Verify** function can be helpful. It outlines the work to be done in going to Protect All and provides an inventory of all data sets that do not have RACF protection.

Command function

Try the **CARLa options** function, which is option **CO** on the primary panel.

See [Chapter 12, “CARLa queries,”](#) on page 125.

Appendix A. Frequently asked questions

This section provides a list of frequently asked questions along with detailed answers.

Table 13. Frequently Asked Questions

Q: Why is the Main panel empty?

A: You need READ access to the CKR. ** profile in the XFACILIT class. CKR. ** profiles can allow or prohibit the use of functions.

Q: I am still not sure which functions are for zSecure Admin and which are for zSecure Audit for RACF. How can I separate them?

A: You can check the *IBM Security zSecure Admin and Audit for RACF: User Reference Manual*. With every function, the manual shows a check box indicating which product supports it. You can also add `LIMIT FOCUS=AUDITRACF` to the preamble `SETUP PREAMBLE (SE.3)` to limit the usable function to those functions in zSecure Audit.

Q: How can I generate the `DEFINE ALIAS` as part of the `COPY USER` action?

A: The catalog information is from the CKFREEZE data set. So you must include a CKFREEZE data set in the set of input files that you use. To create a CKFREEZE data set, use the option **SETUP NEWFILES** from the panels to generate the JCL. Save this JCL and run it early every morning by using IBM Workload Scheduler or a similar product. The CKFREEZE data set can be large, so use **SYSIN** parameters to reduce its size. First, try creating a large CKFREEZE, running it with APF, and specifying no parameters.

If running zSecure Admin with this CKFREEZE setting is too slow, add parameters:

VTOC=NO,CAT=MCAT,BCD=NO,CICS=NO,MCD=NO,TMC=NO,RMM=NO,UNIX=NO,DB2=NO,MQ=NO. You still need the bigger CKFREEZE if you want to delete users, including their data sets.

You can also enter the line command **MT** (manage TSO) in front of a User profile in the **RA.U** option. You can then define the alias and the ISPF profile data set for an existing user. With this alternative, however, you must know the name of the catalog to which you want to add the user's alias.

Q: Can I collect information of unloaded RACF and CKFREEZE files on different systems and send this information to one system for display and analysis?

A: Yes, if all systems are licensed. This way is a typical way to use zSecure Admin and Audit for RACF.

Q: The output from my **L** line command does not match the information that is reported by zSecure Admin and zSecure Audit for RACF. What is wrong?

A: Check the input RACF data source. You are probably reporting from a RACF unload. Whereas, the **L** line command always shows the information from the active RACF database.

Q: How do I handle a shared JES2 spool environment with one RACF database and several z/OS images?

A: Run the RACF unload one time from any system unless you want to work with live RACF data. Run multiple zSecure Collect jobs, one on each system. You can use the **SHARED=NO** parameter with the second or more zSecure Collect for z/OS job. Using the **SHARED=NO** parameter reduces the size of the resulting CKFREEZE data sets. You can do this action only if your UCBs are properly defined with **SHARED** options to exactly reflect the sharing environment. Otherwise, zSecure Collect for z/OS processes everything. Create an `INPUT SET` that has these multiple CKFREEZE data sets defined.

Q: When do I use my live RACF database with zSecure Admin and zSecure Audit for RACF? When do I use unloaded data and when do I use an old database copy?

Table 13. Frequently Asked Questions (continued)

A: Use the live RACF database for simple *ad hoc* inquiries and day-to-day routine RACF administration. Use an unloaded copy of the RACF database when you intend to do extensive analysis work and you have no immediate intention of changing RACF data. When you are planning to use the re-create function, be sure to run from an old database copy because an unload database does not contain passwords. If you are working with RACF data from another system, this data is unloaded unless the RACF database for the other system is on shared DASD and is accessed directly as a normal data set. As an oversimplified statement, an *administrator* typically works with the live RACF database, while an *auditor* typically works with an unloaded copy.

Q: I produced a report that contains double lines for all reported profiles. What can cause this problem?

A: There are two possibilities that can cause this problem. If you created this overview with the panels, then the double lines might be caused by selecting two RACF data sources in the **SETUP** application. When you are using CARLa, this same problem can be caused by forgetting to specify the keyword **SEGMENT=BASE** in the **SELECT** statement.

Q: I used the **SETUP INPUT** options to define my input sets. The next time that I used zSecure Admin and zSecure Audit for RACF, my setup values were not saved. Why?

A: You might have used a different TSO user ID the second time. The setup information is saved in your ISPF profile, and each TSO user ID has its own ISPF profile data set. Also, there is a **SETUP** option to use the input files you last used. Look at the **SETUP RUN** to determine the setting of this option.

Q: zSecure Admin and Audit for RACF inspects many z/OS controls for various reports. When do the products obtain these controls from z/OS storage and when do you use a CKFREEZE data set?

A: For *full* checking, zSecure Admin and Audit for RACF uses z/OS control blocks that are copied into the CKFREEZE data set. While this problem is more complex than using in-storage z/OS data, it produces much more consistent results. The results are meaningful for the time at which the CKFREEZE data was collected. For this reason, you might sometimes want to collect CKFREEZE data when your system is fully loaded and most active. It also means that you can do studies on remote z/OS systems. Use a CKFREEZE file and RACF unloaded data that was created on the remote system.

Q: I prefer to use an unloaded RACF database for my analysis work. When I find something that must be corrected, I typically use the RACF commands that are generated by zSecure Admin and zSecure Audit for RACF. I sometimes edit them to correct the problem. However, my unloaded RACF database represents historical data. How do I know whether the same problem still exists in the live RACF database?

A: Before you submit any significant change to RACF, switch to the live RACF database by using a different *input* set in the Setup panels. Repeat the display that detected the problem. If the problem still exists, then run the RACF changes.

Q: Some panels, such as the AUDIT STATUS panel, differentiate between full CKFREEZE data sets and some other type of CKFREEZE data sets. What is this?

A: Using the instructions in this evaluation guide, when you defined *new input* files and ran the Refresh job, you created a full CKFREEZE data set. In large or widely distributed installations, a CKFREEZE data set can be large. You might want to save multiple CKFREEZE data sets for audit and comparison purposes. There are options in zSecure Collect for z/OS to gather only part of the potential CKFREEZE data. Multiple CKFREEZE data sets are useful. For example, if you use the freeze functions to detect changes in various libraries, or if your auditors want system snapshots at certain defined times.

Q: I want to clone a user by using the **RACF/MASS UPDATE/COPY USER** function, but the target, which is a new user, is already defined. How is this problem handled?

Table 13. Frequently Asked Questions (continued)

A: Assuming that you want to keep some of the permissions of the existing target user, use the **Copy** function and type / before **Generate RACF commands when the target user exists**. This action leaves existing permissions of the target, provided they do not conflict with authorities of the source user. If a conflict occurs, then the final authority rests with the source or target user, depending on the exact commands (add versus alter). The target user might have some of its existing authority levels reduced because the source user had these lower levels.

Q: I get message CKR0536 when I attempt to copy to an existing user ID.

A: If your intent is to have the set of commands as a basis to start editing, then you can suppress the message by putting a / before **Generate RACF commands when the target user exists**. The standard way to merge user attributes is to use MERGE.

Q: I must do daily security administration. What RACF data source do I use?

A: For daily security administration, use an up-to-date RACF database. This database can be the active primary RACF database or the active backup RACF database. Changes to the active primary database are immediately replicated to the active backup RACF database. Because the active backup database is not used for access verification processing, it is a good practice to use it as the input data source. This practice does not degrade the performance of the RACF database when you run the access verification process for the other users of the system while you run reports.

Notices

This information was developed for products and services offered in the U.S.A.

IBM may not offer the products, services, or features discussed in this document in other countries. Consult your local IBM representative for information on the products and services currently available in your area. Any reference to an IBM product, program, or service is not intended to state or imply that only that IBM product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any IBM intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-IBM product, program, or service.

IBM may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

IBM Director of Licensing
IBM Corporation
North Castle Drive
Armonk, NY 10504-1785
U.S.A.

For license inquiries regarding double-byte (DBCS) information, contact the IBM Intellectual Property Department in your country or send inquiries, in writing, to:

Intellectual Property Licensing
Legal and Intellectual Property Law
IBM Japan, Ltd.
1623-14, Shimotsuruma, Yamato-shi
Kanagawa 242-8502 Japan

The following paragraph does not apply to the United Kingdom or any other country where such provisions are inconsistent with local law:

INTERNATIONAL BUSINESS MACHINES CORPORATION PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

Some states do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement might not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. IBM may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

Any references in this information to non-IBM Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this IBM product and use of those Web sites is at your own risk.

IBM may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Licensees of this program who wish to have information about it for the purpose of enabling: (i) the exchange of information between independently created programs and other programs (including this one) and (ii) the mutual use of the information which has been exchanged, should contact:

IBM Corporation
224A/101

11400 Burnet Road
Austin, TX 78758 U.S.A.

Such information may be available, subject to appropriate terms and conditions, including in some cases payment of a fee.

The licensed program described in this document and all licensed material available for it are provided by IBM under terms of the IBM Customer Agreement, IBM International Program License Agreement or any equivalent agreement between us.

Any performance data contained herein was determined in a controlled environment. Therefore, the results obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurement may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

Information concerning non-IBM products was obtained from the suppliers of those products, their published announcements or other publicly available sources. IBM has not tested those products and cannot confirm the accuracy of performance, compatibility or any other claims related to non-IBM products. Questions on the capabilities of non-IBM products should be addressed to the suppliers of those products.

All statements regarding IBM's future direction or intent are subject to change or withdrawal without notice, and represent goals and objectives only.

This information contains examples of data and reports used in daily business operations. To illustrate them as completely as possible, the examples include the names of individuals, companies, brands, and products. All of these names are fictitious and any similarity to the names and addresses used by an actual business enterprise is entirely coincidental.

COPYRIGHT LICENSE:

This information contains sample application programs in source language, which illustrate programming techniques on various operating platforms. You may copy, modify, and distribute these sample programs in any form without payment to IBM, for the purposes of developing, using, marketing or distributing application programs conforming to the application programming interface for the operating platform for which the sample programs are written. These examples have not been thoroughly tested under all conditions. IBM, therefore, cannot guarantee or imply reliability, serviceability, or function of these programs. You may copy, modify, and distribute these sample programs in any form without payment to IBM for the purposes of developing, using, marketing, or distributing application programs conforming to IBM's application programming interfaces.

If you are viewing this information in softcopy form, the photographs and color illustrations might not be displayed.

Trademarks

IBM, the IBM logo, and ibm.com[®] are trademarks or registered trademarks of International Business Machines Corporation, in the United States and/or other countries. Other product and service names might be trademarks of IBM or other companies. A current list of IBM trademarks is available on ibm.com/legal/copytrade.

Adobe, the Adobe logo, PostScript, and the PostScript logo are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States, and/or other countries.

IT Infrastructure Library is a Registered Trade Mark of AXELOS Limited.

ITIL is a Registered Trade Mark of AXELOS Limited.

Intel, Intel logo, Intel Inside, Intel Inside logo, Intel Centrino, Intel Centrino logo, Celeron, Intel Xeon, Intel SpeedStep, Itanium, and Pentium are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries.

Microsoft, Windows, Windows NT, and the Windows logo are trademarks of Microsoft Corporation in the United States, other countries, or both.

Java and all Java-based trademarks and logos are trademarks or registered trademarks of Oracle and/or its affiliates.

UNIX is a registered trademark of The Open Group in the United States and other countries.

VMware, the VMware logo, VMware Cloud Foundation, VMware Cloud Foundation Service, VMware vCenter Server, and VMware vSphere are registered trademarks or trademarks of VMware, Inc. or its subsidiaries in the United States and/or other jurisdictions.

Cell Broadband Engine is a trademark of Sony Computer Entertainment, Inc. in the United States, other countries, or both and is used under license therefrom.

Linear Tape-Open, LTO, the LTO Logo, Ultrium and the Ultrium Logo are registered trademarks of Hewlett Packard Enterprise, International Business Machines Corporation and Quantum Corporation in the United States and other countries.

Other company, product, and service names may be trademarks or service marks of others.

Index

Numerics

3270 format [5](#)

A

Access check

 detail panel [23](#)

 entry panel [23](#)

Access command [23](#)

access control list

 commands [20](#)

 display [19](#)

 display settings [22](#), [23](#)

 effective [20](#)

 formats [20](#)

 group information, display [55](#)

 sort order [55](#)

 user information, display [55](#)

 Verify functions, run [65](#)

 view options [55](#)

access rights [24](#)

ACL, *See* access control list

ACL commands

 ACL EFFECTIVE [20](#)

 ACL EFFECTIVE (F) [20](#)

 ACL EXPLODE [22](#)

 ACL NOSCOPE [20](#)

 ACL RESOLVE [22](#)

 ACL RESOLVE (R) [20](#)

 ACL SCOPE [20](#)

 ACL SORT ACCESS [20](#)

Add / copy connect panel [15](#)

Add connect panel [15](#)

address space name [55](#)

administration functions

 distributed [43](#)

 overview [43](#)

administration tasks, typical [131](#)

allocation parameters [49](#)

APF

 authorized functions [4](#)

application segments [12](#)

Archive output to a data set panel [62](#)

attributes

 AUDITOR [38](#)

 ERASE ON SCRATCH (EOS) [18](#)

 OPERATIONS [10](#)

 SPECIAL [10](#)

 UNIVERSAL [14](#)

AU.R [73](#), [74](#)

AU.R.C [74](#), [76](#), [79–82](#)

AU.R.E [82](#), [84](#), [86](#), [87](#)

AU.S function [40](#), [69](#)

Audit

 Library function [131](#)

 report overview [69](#)

Audit (*continued*)

 status panel [69](#)

 status RACFCLAS report [69](#)

 status SETROPTS report [69](#)

audit tasks, typical [131](#)

AUDITOR attribute [38](#)

B

basic operations [5](#)

C

CARLa

 access matrix [127](#)

 auditing [2](#)

 Auditing and Reporting Language [1](#)

 data source [3](#)

 language, purpose of [2](#)

 reporting [2](#)

 sample reports [2](#)

CARLa commands

 overview [2](#)

CARLa options [132](#)

CARLa program

 copy [125](#)

 create [128](#)

 customize [127](#)

 example [128](#)

 run saved [129](#)

CARLa queries

 batch mode [125](#)

 overview [125](#)

 samples [125](#)

certificate templates, create [24](#)

CICS

 profiles [34](#)

 program report [103](#)

 Programs panel [103](#)

 region report [102](#)

 region, transaction, and program data report [101](#), [102](#)

 Regions panel [102](#)

 Resource panel [102](#)

 transaction report [102](#)

 Transactions panel [102](#)

CKA\$INDX index member [125](#), [126](#)

CKFREEZE

 data sets [4](#), [49](#), [99](#), [133](#)

 data sources [3](#)

 data, add from file [49](#)

 files, collect information [133](#)

 user deleted [36](#)

CKG scope [44](#)

CKGRACF

 authorization [33](#)

 CKRCARLa, differences from [44](#)

 commands [6](#), [45](#)

- CKGRACF (*continued*)
 - functions [44](#)
- CKR command [5](#)
- CKR.** profile [133](#)
- CKR.OPTION profiles [47](#)
- CKR.READALL profile [43](#)
- CKR0536 message [133](#)
- CKRCARLA
 - CKGRACF, differences from [44](#)
 - commands sent to [1](#)
 - language [2](#)
- CKRCMD files [62](#), [67](#), [128](#)
- CKRLMTX3 member [126](#)
- CKXLOG [34](#)
- CO option [126](#)
- CO.C option [125](#)
- Collections, SETUP [52](#)
- Command function [132](#)
- Command logging facility [34](#)
- commands
 - Access [23](#)
 - ACL, *See* ACL commands
 - C [15](#)
 - CARLa [2](#)
 - CKGRACF [6](#), [45](#)
 - CKR [5](#)
 - CO [15](#)
 - D [15](#)
 - execution control [56](#)
 - find 'verify' [67](#)
 - find 'verify' [65](#)
 - FORALL [6](#), [7](#)
 - L [133](#)
 - line [7](#)
 - line, specifying [59](#)
 - LIST [20](#)
 - MT (manage TSO) [133](#)
 - PE (permit) [24](#)
 - PERMIT [24](#), [44](#)
 - Permit Delete [24](#)
 - PRT [20](#), [62](#), [132](#)
 - RACDCERT [28](#)
 - RACF, *See* RACF commands
 - RDEFINE [44](#)
 - RESULTS [62](#), [132](#)
 - routing settings [56](#)
 - S [10](#), [18](#)
 - SE [12](#)
 - SET [22](#)
 - SETROPTS [40](#)
 - SETUP FILES C [10](#)
 - SETUP FILES S [10](#)
 - SETUP VIEW [22](#), [43](#)
 - SIMULATE RESTRICT [43](#)
 - sort class [69](#)
 - sort pos [69](#)
 - TSO ISRDDN [126](#)
 - UACC(NONE) [43](#)
 - viewing [59](#)
 - W [62](#)
- Commands (CO) used to run library commands panel [126](#)
- Common Address Space Work [93](#)
- Compare connects matrix panel [31](#)
- Compare permits detail panel [31](#)

- Compare users panel [31](#)
- compliance evaluation
 - AU.R.C (Configure) [74](#), [81](#)
 - AU.R.C (Evaluate) [76](#), [79](#), [80](#), [82](#)
 - AU.R.E (Evaluate) [82](#), [84](#), [86](#), [87](#)
- CONFIGA [80](#)
- CONFIGL [81](#)
- CONFIGLL [81](#)
- CONFIGS [79](#)
- CONFIGX [82](#)
- Confirm option [55](#)
- Confirm panel [33](#), [56](#)
- confirmation settings [56](#)
- COPY USER [133](#)
- create certificate template [24](#)

D

- daily security administration [133](#)
- DASD data [4](#)
- data
 - add [49](#)
 - disk space allocation [49](#)
 - display control [49](#)
 - display, scrolling [7](#)
 - file refresh [51](#)
 - file reload [51](#)
 - files, add [49](#)
 - input set [49](#), [52](#)
 - manage
 - add new data [49](#)
 - source switching [49](#)
- data set profile, *See* profiles, data set
- Data set Selection panel [16](#), [18](#), [19](#)
- data sets
 - Activity [93](#)
 - CKFREEZE [4](#), [49](#), [99](#), [133](#)
 - Common Address Space Work [93](#)
 - definition panel [49](#)
 - ISPF LIST [20](#), [132](#)
 - RACF [93](#)
 - RACF, Verify functions [65](#)
 - sequential [62](#)
 - SMF [4](#), [99](#)
 - SMF administrations [93](#)
 - Status [93](#)
 - SYSOUT [55](#)
 - user access to [23](#)
 - user access, view [131](#)
 - VSAM Catalog Entry [93](#)
 - VSAM Volume [93](#)
- data sources
 - CARLa [3](#)
 - CKFREEZE [3](#)
 - events [3](#)
 - RACF [3](#)
- data, print [132](#)
- databases
 - RACF, *See* RACF databases
- date selection values [12](#)
- Db2 reports
 - Regions selection panel [104](#)
 - resource [105](#)
- DCB parameters [49](#)

DEFINE ALIAS [133](#)
digital certificate, create template [24](#)
digital certificates [28](#)
discrete data set profiles [19](#)
display panels. printing [132](#)
Display Selection panel [40](#)
documentation
 obtain licensed publications [vii](#)
DSMON utility [38](#)
DUMPDATE [12](#)

E

education [xii](#)
EGN
 name patterns [16](#)
 See also Enhanced Generic Naming notation
email
 reports, send via [55](#)
 SMTP options [55](#)
Email specification panel [63](#)
Enhanced Generic Naming (EGN) notation [12](#)
ERASE ON SCRATCH (EOS) attributes [18](#)
EV.I option [109](#)
event log record detail panel [97](#)
Events User Selection panel [97](#)
events, data sources [3](#)

F

FAQs [133](#)
features [1](#)
field help [7](#)
files
 add [49](#)
 CKRCMD [62](#), [128](#)
 functions that produced [132](#)
 refresh [51](#)
 reload [51](#)
 REPORT [62](#)
 SMF [51](#)
 SYSPRINT [62](#), [65](#), [67](#)
filters
 data exclusion [12](#)
 data inclusion [12](#)
 notation [12](#)
find 'v e r i f y' command [67](#)
find 'v e r i f y' command [65](#)
FORALL command [6](#), [7](#)
functions
 AU.S [40](#), [69](#)
 Audit Library [131](#)
 CKGRACF [44](#)
 Command [132](#)
 files produced from last [132](#)
 Group Admin [44](#)
 Helpdesk [44](#), [45](#)
 library Change Detection [99](#)
 line commands [59](#)
 Match [132](#)
 Overtime [58](#)
 product, determine for which [133](#)
 Protect All [132](#)

functions (*continued*)
 Protect All Verify [132](#)
 RA.S [40](#)
 RA.U [131](#)
 RACF/MASS UPDATE/COPY USER
 [133](#)
 Report Permit/Scope [131](#)
 Setup [49](#)
 Verify [65](#), [67](#)
 Verify Indicated [67](#)

G

general design features [1](#)
Generation Data Groups (GDGs) [94](#)
Group Admin functions [44](#)
Group Selection panel [13](#), [14](#)
Group tree report [38](#)
groups
 administer through CKGRACF [44](#)
 administration, limiting [43](#)
 administrator, limiting function [43](#)
 auditor view [43](#)
 definition loops [65](#)
 mass updates [34](#)
 profile [13](#)
 universal
 advantages of [14](#)
 definition [14](#)
 disadvantages of [14](#)
 users, add to [15](#)
 users, delete from [15](#)

H

help
 field [7](#)
 panel [7](#)
help desk users [44](#)
Helpdesk function
 accessing [45](#)
 disable [47](#)
 enable [47](#)
 example of how it works [45](#)
 overview [44](#)
 passwords [46](#)
 single panel [45](#)
 tailor [47](#)

I

IBM
 Software Support [xiii](#)
 Support Assistant [xiii](#)
IFASMF DL [3](#), [93](#)
IFASMF DP [3](#), [93](#)
IMS
 PSB panel [113](#)
 PSB report [113](#)
 region report [112](#)
 region, transaction, and program data report [101](#)
 Regions panel [112](#)
 Resource panel [111](#)

- IMS (*continued*)
 - transaction report [112](#)
 - Transactions selection panel [112](#)
- IMS region, transaction, and program data reports [111](#)
- input
 - file settings [94](#)
 - sets, define for SMF data [94](#)
 - sets, select [52](#)
- Input
 - file selection panel [52](#)
 - set definition panel [99](#)
- installation data field [55](#)
- INSTDATA parameter [55](#)
- IP stack Selection panel [109](#)
- IRRADU00 SMF [3](#)
- ISPF
 - CARLa commands [2](#)
 - Command Shell [5](#)
 - display colors, changing [7](#)
 - interface, using [6](#)
 - LIST data set [20](#), [132](#)
 - reports [125](#), [126](#)
- ISPF format [5](#)

J

- JES2 shared spool environment [133](#)
- JOB statement [51](#)
- JOBLIB statement [51](#)

K

- key rings [28](#)

L

- L command [133](#)
- libraries
 - APF [131](#)
 - auditing [131](#)
 - change detection [99](#)
 - load [131](#)
 - SCKRCARL, *See* SCKRCARL library
 - source [131](#)
 - systems [131](#)
- Libraries panel [99](#)
- Library Change Detection function [99](#)
- licensed documentation [vii](#)
- LIMIT FOCUS=AUDITRACF [133](#)
- line commands [7](#), [59](#)
- load libraries, audit [131](#)
- logon
 - region size [5](#)
 - TSO parameters [5](#)

M

- Mass update panel [34](#)
- Mass Update panel [35](#)
- Match function [132](#)
- MQ reports
 - Regions selection panel [117](#)
 - selection panel [118](#)

- MT (manage TSO) command [133](#)
- multisystem support
 - remote data [4](#)
 - route commands to remote systems [4](#)

N

- New files panel [49](#)

O

- online
 - publications [vii](#), [x](#)
 - terminology [vii](#)
- OPERATIONS attribute [10](#)
- operators
 - Connect Authority [10](#)
 - dates [12](#)
- options
 - CO [126](#)
 - CO.C [125](#)
 - Confirm [55](#)
 - EV.I [109](#)
 - P [103](#), [112](#), [113](#)
 - R [102](#)
 - RA.4.4 [36](#)
 - RACDCERT (RA.5) [28](#)
 - RE.C [102](#)
 - RE.I [109](#)
 - RE.M [111](#)
 - RE.U [120](#)
 - REPORTS (RA.3) [31](#)
 - Resource report [101](#)
 - SE [23](#)
 - SE.9 [24](#)
 - SE.B [52](#)
 - SE.R [5](#)
 - set up [49](#)
 - SETUP NEWFILES [133](#)
 - T [102](#)
 - View [55](#)
- Output panel [55](#)
- Overtyping function [58](#)

P

- P option [103](#), [113](#)
- panel help [7](#)
- panels
 - Access check detail [23](#)
 - Access check entry [23](#)
 - Add / copy connect [15](#)
 - Add connect [15](#)
 - Archive output to a data set [62](#)
 - Audit status [69](#)
 - CICS Programs [103](#)
 - CICS Regions [102](#)
 - CICS Resource [102](#)
 - CICS Transactions [102](#)
 - Commands (CO) used to run library commands [126](#)
 - Compare connects matrix [31](#)
 - Compare permits detail [31](#)
 - Compare users [31](#)

panels (*continued*)

- Confirm [56](#)
- Data set Selection [16](#), [18](#), [19](#)
- Db2 Regions [104](#)
- Db2 selection [105](#)
- define data set definition [49](#)
- DIGTCERT selection [28](#)
- Display Selection [40](#)
- Email specification [63](#)
- event log record detail [97](#)
- Events User Selection [97](#)
- File Integrity Monitoring [107](#)
- Group selection [14](#)
- Group Selection [13](#)
- IMS PSB [113](#)
- IMS Regions [112](#)
- IMS Resource [111](#)
- IMS Transactions selection [112](#)
- Input file selection [52](#)
- Input set definition [99](#)
- IP stack Selection [109](#)
- Libraries [99](#)
- Mass update [34](#)
- Mass Update [35](#)
- MQ Regions [117](#)
- MQ selection [118](#)
- New files [49](#)
- Output [55](#)
- Profiles Non-redundant [37](#)
- Quick Administration [43](#), [44](#)
- RACF class settings [40](#)
- RACF events [96](#)
- Reports - REDUNDANT [37](#)
- Resource Db2 [104](#)
- Resource MQ [117](#)
- Resource Trusted [119](#)
- Resource UNIX selection [120](#)
- Resource VTAM [114](#)
- Results [62](#)
- scrolling [49](#)
- SETROPTS settings - audit concerns [69](#)
- SETROPTS system settings [40](#)
- Setup [22](#), [23](#), [49](#), [55](#), [94](#)
- Setup output definition [55](#)
- Setup View [22](#)
- Single panel Helpdesk [45](#)
- SMF selection [28](#)
- SMF selection criteria [96](#)
- Tailored Helpdesk [47](#)
- Typical allocation [49](#)
- User Attributes [10](#)
- User multiple copy [35](#)
- User Selection [10](#)
- Verify selection [65](#)

panelsScope report

- Scope report [61](#)
- Scope report Results [61](#)

parameters

- allocation [49](#)
- DCB [49](#)
- INSTDATA [55](#)
- Setup [55](#)

partitioned data set [62](#)

Partitioned Data Set (PDS) directories [4](#)

passwords

- default [46](#)
- enable [46](#)
- reset [46](#)
- set [46](#)

PDS, *See* Partitioned Data Set

PERMIT command [24](#), [44](#)

Permit Delete command [24](#)

problem-determination [xiii](#)

problems and solutions [133](#)

product

- manage [1](#)
- start [5](#)

profiles

- CICS [34](#)
- CKR.** [133](#)
- CKR.OPTION [47](#)
- CKR.READALL [43](#)
- CKX.CKXLOG.** [34](#)
- compare [36](#)
- data, change [33](#)
- filters [6](#)
- find [132](#)
- merge [36](#)
- PROGRAM [65](#)
- querying [13](#)
- RACF, *See* RACF profiles
- RACF databases [7](#)
- RACF, maintaining [6](#)
- reports, creating from remote data [4](#)
- search criteria [132](#)
- user access [23](#)
- warning mode list [18](#)
- XFACILIT [43](#), [47](#)
- XFACILIT class [44](#)

Profiles Non-redundant panel [37](#)

profiles, data set

- access rights administration [24](#)
- discrete [19](#)
- display [16](#)
- inquires [16](#)
- list [19](#)
- mass updates [34](#)
- redundant [37](#)

profiles, group

- connected users, maximum [14](#)
- searching [13](#)

profiles, user

- application segments, show [12](#)
- cloning [35](#)
- displaying [7](#)
- RACF management selection criteria, *See* user profile
- recreate [36](#)
- system-wide authority [10](#)

Program Access to data sets (PADS) [43](#)

PROGRAM profiles [65](#)

Protect All environment [132](#)

PROTECT ALL environment [65](#)

Protect All function [132](#)

Protect All Verify function [132](#)

PRT command [62](#), [132](#)

publications

- accessing online [vii](#), [x](#)
- list of for this product [vii](#), [x](#)

publications (*continued*)
 obtain licensed publications [vii](#)
 obtaining licensed [vii](#)

Q

questions, frequently asked [133](#)
Quick Administration panel
 option X, opening with [43](#)
 overview [43](#)
 RA.Q, opening with [44](#)
 stand-alone, opening [43](#)

R

R option [102](#)
RA.1 function [23](#)
RA.4.4 option [36](#)
RA.S function [40](#)
RA.U function [131](#)
RACDCERT
 (RA.5) option [28](#)
 selection panel [28](#)
RACDCERT command [28](#)
RACF
 access credentials, remove [131](#)
 administrator
 scope limitation [43](#)
 view [43](#)
 Class Descriptor Table [69](#)
 class settings panel [40](#)
 command generation [1](#)
 commands, routing [4](#)
 data from zSecure [3](#)
 data sources [3, 56](#)
 data, change [33](#)
 databases [3, 4, 6](#)
 EGN mode [12](#)
 events panel [96](#)
 filters [6](#)
 input data sets [94](#)
 integrity analysis [65](#)
 mass updates to [34](#)
 monitoring [1](#)
 natural scope [43](#)
 processing [3](#)
 profiles maintenance [6](#)
 protection [132](#)
 Remote Sharing Facility (RRSF) services [4](#)
 reports on data [61](#)
 security analysis [65](#)
 start products [5](#)
 unloaded files, collect information [133](#)
 variables [35](#)
RACF access permissions
 exploded list [20](#)
 multiple permissions resolution [20](#)
 resolved list [20](#)
 sexploded list [20](#)
RACF commands
 confirming [33](#)
 database, changing [33](#)
 generating [33](#)

RACF commands (*continued*)
 mass updates, using [34](#)
 values, changing and verifying [58](#)
RACF data sets
 file refresh [51](#)
 file reload [51](#)
 profile, recreate from [36](#)
 record types [93](#)
RACF databases
 alterations [56](#)
 change authority [33](#)
 commands that change [33](#)
 data input sets [52](#)
 data, add from [49](#)
 group profiles
 querying [13](#)
 searching [13](#)
 live, when to use [133](#)
 maximum size [14](#)
 profile, compare [36](#)
 profile, merge [36](#)
 profile, recreate from [36](#)
 redundant profile management [37](#)
 report for managing [38](#)
 unloaded [12, 49](#)
 user profiles, displaying [7](#)
RACF profiles
 date sets, corresponding [65](#)
 maximum size [14](#)
 obsolete, identifying [65](#)
 user access to [23](#)
 Verify functions [65](#)
RACF/MASS UPDATE/COPY USER function [133](#)
RACFCLAS report [40](#)
RACFDB2 region and resource data reports [101](#)
RACFVARS [35](#)
RDEFINE command [44](#)
RE.C option [102](#)
RE.I option [109](#)
RE.M option [111](#)
RE.U option [120](#)
remote systems communication [4](#)
REPORT file [62](#)
Report Permit/Scope function [131](#)
REPORT WRITER [3](#)
reports
 archiving [62](#)
 Audit report overview [69](#)
 Audit status RACFCLAS [69](#)
 Audit status SETROPTS [69](#)
 CARLA access matrix [127](#)
 categories [69](#)
 CICS program [103](#)
 CICS region [102](#)
 CICS region, transaction, and program data [101](#)
 CICS region, transaction, and program data report [102](#)
 CICS transaction [102](#)
 Compare users [31](#)
 custom [2, 125](#)
 Db2 regions [104](#)
 Db2 resource [105](#)
 double line problem [133](#)
 email [63](#)
 generating [61](#)

reports (*continued*)

- Group tree [38](#)
- IMS PSB [113](#)
- IMS region [112](#)
- IMS region, transaction, and program data [101](#)
- IMS transaction [112](#)
- IP stack configuration [109](#)
- ISPF [125](#)
- MQ regions [117](#)
- MQ resources [118](#)
- profiles [4](#)
- RACF resources [101](#)
- RACFCLAS [40](#)
- remote data, creating from [4](#)
- Results panel [61](#), [62](#)
- samples in CARLa library [2](#)
- SCKRCARL library [126](#)
- Scope report panel [61](#)
- SETROPTS [40](#)
- SETROPTS audit concerns [69](#)
- settings [4](#)
- SMF [96](#)
- standard [2](#)
- TCP/IP configuration and statistics [101](#), [109](#)
- UNIX audit [120](#)
- UNIX file system [101](#), [120](#)
- UNIX file system information and audit reports [120](#)
- UNIX summary [120](#)
- Reports - REDUNDANT panel [37](#)
- REPORTS (RA.3) option [31](#)
- Resource Db2 panel [104](#)
- Resource File Integrity Monitoring [107](#)
- Resource MQ panel [117](#)
- Resource report option [101](#)
- Resource Trusted panel [119](#)
- Resource UNIX selection panel [120](#)
- Resource VTAM panel [114](#)
- RESULTS command [62](#), [132](#)
- Results panel [62](#)
- RRSF nodes autocommand environment [56](#)
- RRSF services, *See* RACF Remote Sharing Facility
- rule-based compliance
 - AU.R.C (Configure)
 - CONFIGL [81](#)
 - CONFIGLL [81](#)
 - AU.R.C (Evaluate)
 - CONFIGA [80](#)
 - CONFIGS [79](#)
 - CONFIGX [82](#)
 - STANDARD [76](#)
 - AU.R.E (Evaluate)
 - STDRULES [84](#)
 - STDTESTST [87](#)
 - STDYPES [86](#)
 - compliance menu options [74](#)
 - overview [73](#)

S

- S command [10](#), [18](#)
- SCKRCARL
 - library members [126](#)
- SCKRCARL library
 - overview [125](#)

SCKRCARL library (*continued*)

- report [126](#)
- Scope report panel [61](#)
- screen formatting [5](#)
- SE command [12](#)
- SE option [23](#)
- SE.9 option [24](#)
- SE.B option [52](#)
- SE.R option [5](#)
- security
 - administration, daily [133](#)
 - audit [69](#)
 - integrity [69](#)
- segments
 - adding [10](#)
 - application [12](#)
- sequential data set [62](#)
- SET command [22](#)
- set up options [49](#)
- SETROPTS
 - audit concerns overview report [69](#)
 - command [40](#)
 - report [40](#)
 - settings, view [69](#)
 - system settings panel [40](#)
- settings reports, creating from remote data [4](#)
- Setup
 - functions [49](#)
 - parameters [55](#)
 - View panel [22](#)
- SETUP - Collections [52](#)
- SETUP FILES
 - C command [10](#)
 - S command [10](#)
- SETUP NEWFILES option [133](#)
- SETUP NLS [47](#)
- Setup output definition panel [55](#)
- Setup panel [22](#), [23](#), [49](#), [55](#), [94](#)
- SETUP PREAMBLE [133](#)
- SETUP VIEW command [22](#)
- SIMULATE RESTRICT command [43](#)
- Single panel Helpdesk [45](#)
- SMF
 - analysis [94](#)
 - data [3](#)
 - data administration [93](#)
 - data analysis [93](#)
 - data processing input [94](#)
 - data sets [3](#), [4](#), [93](#), [99](#)
 - files [51](#)
 - Generation Data Groups (GDGs) [94](#)
 - input data sets [94](#)
 - input files [4](#)
 - IP configuration data events [109](#)
 - log streams [3](#)
 - programs [3](#)
 - pseudo files [3](#)
 - Query function [93](#)
 - record types [93](#)
 - records [3](#)
 - reports [96](#)
 - selection panel [96](#)
 - Setup option [94](#)
- SMTP

- SMTP (*continued*)
 - address space name [55](#)
 - options [55](#)
- sort class command [69](#)
- sort pos command [69](#)
- SPECIAL
 - APF-authorization [44](#)
 - attribute [10](#)
- STANDARD [76](#)
- started task
 - CKXLOG [34](#)
- STDRULES [84](#)
- STDTESTS [87](#)
- STDYPES [86](#)
- STEPLIB statement [51](#)
- SuperVisor Calls (SVCs) [99](#)
- SYSOUT data set [55](#)
- SYSPRINT file [62](#), [65](#), [67](#)
- Systems Management Facility (SMF) reporting [1](#)

T

- T option [102](#), [112](#)
- Tailored Helpdesk panel [47](#)
- tasks, typical [59](#)
- TCP/IP
 - configuration and statistics reports [101](#), [109](#)
- template, certificate [24](#)
- terminology [vii](#)
- tokens [28](#)
- training [xii](#)
- troubleshooting [xiii](#)
- Trusted Computing Base (TCB) [1](#)
- TSO ISRDDN command [126](#)
- TSO logon parameters [5](#)
- Typical allocation panel [49](#)

U

- UACC(NONE) command [43](#)
- UNIVERSAL attributes [14](#)
- universal groups, *See* groups, universal
- UNIX
 - audit report [120](#)
 - detail display [120](#)
 - file system information and audit reports [101](#)
 - file system report [120](#)
 - summary report [120](#)
- User Attributes panel [10](#)
- User multiple copy panel [35](#)
- user profile, *See* profiles, user
- User Selection panel [7](#), [10](#)
- users
 - access [20](#)
 - access comparison [31](#)
 - add to group [15](#)
 - adding [10](#)
 - audit types [97](#)
 - clone [133](#)
 - connects, copying [35](#)
 - copy error [133](#)
 - data set access, view [131](#)
 - data, change [33](#)

- users (*continued*)
 - delete [36](#)
 - delete with allocated CKFREEZE [36](#)
 - group, remove from [15](#)
 - mass updates [34](#)
 - permits, copying [35](#)
 - profile [7](#)
 - profile, copying [35](#)
 - profile, recreate [36](#)
 - RACF access credentials, remove [131](#)
 - resources access to [23](#)
 - search for [131](#)
 - status comparison [31](#)
- utilities, DSMON [38](#)

V

- values, verify [58](#)
- Verify functions
 - descriptions [65](#)
 - first-time walkthrough [67](#)
 - guidelines [65](#)
 - running [65](#)
- Verify Indicated function [67](#)
- Verify selection panel [65](#)
- View option [55](#)
- virtual storage [5](#)
- Volume Table Of Contents (VTOCs) [4](#)
- VSAM
 - Catalog Entry [93](#)
 - Volume data set [93](#)
 - Volume Data Set (VVDs) [4](#)
- VTOC, *See* Volume Table Of Contents
- VVDS, *See* VSAM Volume Data Set

W

- W command [62](#)
- warning mode [18](#)

X

- XFACILIT
 - class [133](#)
 - profiles [43](#), [44](#), [47](#)


Z

- z/OS
 - control block data [4](#)
 - integrity analysis [65](#)
 - integrity checking [1](#)
 - library change detection [1](#)
 - monitoring [1](#)
 - security analysis [65](#)
- zSecure Admin
 - functions [1](#)
 - licenses [1](#)
- zSecure Audit
 - functions
 - licenses [1](#)
- zSecure Suite
 - Main Menu [5](#)



Part Number:

GI13-2324-07



(1P) P/N: